

ISC Silicon NPN Power Transistor

BUX21

DESCRIPTION

- Low Collector Saturation Voltage-
- High Switching Speed
- High Current Current Capability

APPLICATIONS



- Desinged for use in switching and linear applications in military and industrial equipment.

Absolute maximum ratings(Ta=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V _{CBO}	Collector-Base Voltage	250	V
V _{CEX}	Collector-Emitter Voltage V _{BE} = -1.5V	250	V
V _{CEO}	Collector-Emitter Voltage	200	V
V _{EBO}	Emitter-Base Voltage	7	V
I _C	Collector Current-Continuous	40	A
I _{CM}	Collector Current-Peak	50	A
I _B	Base Current-Continuous	8	A
P _C	Collector Power Dissipation @T _C =25℃	350	W
T _J	Junction Temperature	200	℃
T _{stg}	Storage Temperature Range	-65~200	℃

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th j-c}	Thermal Resistance,Junction to Case	0.5	℃/W

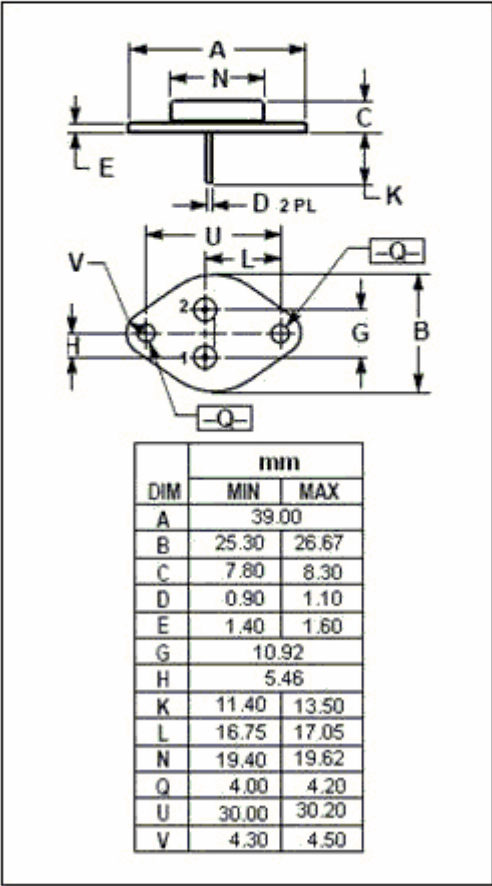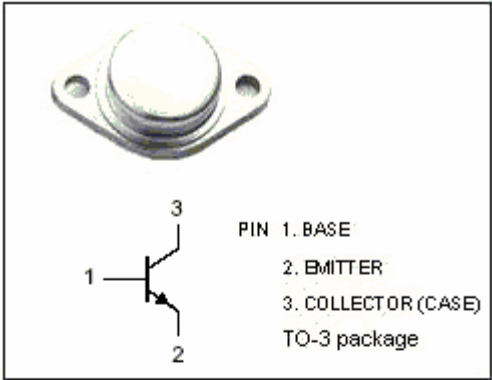

ISC Silicon NPN Power Transistor

BUX21

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=0.2\text{A}; I_B=0$	200			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E=50\text{mA}; I_C=0$	7			V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C=12\text{A}; I_B=1.2\text{A}$			0.6	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C=25\text{A}; I_B=3\text{A}$			1.5	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=25\text{A}; I_B=3\text{A}$			1.5	V
I_{CEO}	Collector Cutoff Current	$V_{CE}=160\text{V}; I_B=0$			3.0	mA
I_{CEX}	Collector Cutoff Current	$V_{CE}=250\text{V}; V_{BE}=-1.5\text{V}$ $V_{CE}=250\text{V}; V_{BE}=-1.5\text{V}; T_C=125^{\circ}\text{C}$			3.0 12.0	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=5\text{V}; I_C=0$			1.0	mA
h_{FE-1}	DC Current Gain	$I_C=12\text{A}; V_{CE}=2\text{V}$	20		60	
h_{FE-2}	DC Current Gain	$I_C=25\text{A}; V_{CE}=4\text{V}$	10			
f_T	Current-Gain—Bandwidth Product	$I_C=2\text{A}; V_{CE}=15\text{V}, f_{\text{test}}=10\text{MHz}$	8			MHz

Switching Times

t_{on}	Turn-on Time	$I_C=25\text{A}; I_{B1}=3\text{A}; V_{CC}=100\text{V}$			1.2	μs
t_s	Storage Time	$I_C=25\text{A}; I_{B1}=-I_{B2}=3\text{A}; V_{CC}=100\text{V}$			1.8	μs
t_f	Fall Time				0.4	μs