


DUAL HIGH POWER OPERATIONAL AMPLIFIER



8-Pin TO-3 And 12-Pin DIP, Dual 5 Amp Operational Amplifier

FEATURES

- Available In Isolated Standard TO-3, "Copper Slug" TO-3 And Power DIP Packages
- 5 Amp Peak Output Current
- Power Supplies to $\pm 40V$
- FET Input
- Dual Configuration
- Available Screened to MIL-STD-883


DESCRIPTION

The OMA2541 is a high performance dual power operational amplifier capable of operation from power supplies up to $\pm 40V$ and continuous output current up to 5A. This device is ideally suited for Military motor driver, servo amplifiers, bridge amplifier, synchro/resolver exertation as well as other power management driver applications. Internal circuitry limits output current to approximately 6 Amps. All products are available with Hi-Rel screening.


ABSOLUTE MAXIMUM RATINGS @ 25°C

Supply Voltage, $+V_S$ to $-V_S$	80V
Output Current, Continuous	5A
Power Dissipation, Internal	125W
Operating Temperature Range	-55°C to 125°C
Storage Temperature Range	-55°C to 150°C
Maximum Junction Temperature	175°C
Lead Temperature (10 Sec. Soldering)	300°C


SCHEMATIC

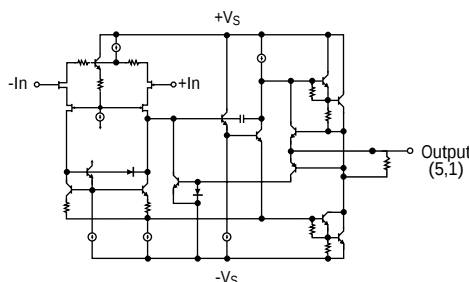

PIN CONNECTION



TOP VIEW D-12



TOP VIEW TO-3

3.4

OMA2541SK OMA2541SKC OMA2541SD

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$; $V_s = \pm 34\text{ V}_{\text{DC}}$ unless otherwise noted.)

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Offset Voltage					
V_{os}			± 0.01	± 2	mV
vs Temperature	-25°C to $+125^\circ\text{C}$		± 15	± 30	$\mu\text{V}/^\circ\text{C}$
vs Temperature	-55°C to -25°C		± 20	± 40	$\mu\text{V}/^\circ\text{C}$
vs Supply Voltage	$V_s = \pm 10\text{V}$ to $\pm V_{\text{MAX}}$		± 2.5	± 10	$\mu\text{V/V}$
vs Power			± 20	± 60	$\mu\text{V/W}$
Input Bias Current			4	50	pA
I_b					
Input Offset Current			± 1	± 30	pA
I_{os}	Specified Temperature Range		± 5	± 20	nA
Input Characteristics					
Common-Mode Voltage Range	-55°C to $+85^\circ\text{C}$	$\pm(\text{dV}_{\text{CE}} - 6)$	$\pm(\text{dV}_{\text{CE}} - 3)$		V
	$+85^\circ\text{C}$ to $+125^\circ\text{C}$	$\pm(\text{dV}_{\text{CE}} - 6.5)$	$\pm(\text{dV}_{\text{CE}} - 3.2)$		V
Common-Mode Rejection	$V_{\text{CM}} = \pm(\text{dV}_{\text{CE}} - 6\text{V})$		113		dB
	$V_{\text{CM}} = \pm 22\text{V}$	95			dB
Input Capacitance*			5		pF
Input Capacitance, DC*			1		T
Gain Characteristics					
Open Loop Gain at 10Hz	$R_L = 10\text{k}$	90	97		dB
Gain Bandwidth Product*			1.6		MHz
Output					
Voltage Swing	$I_o = 5\text{A}$, Continuous	$\pm(\text{dV}_{\text{CE}} - 5.5)$	$\pm(\text{dV}_{\text{CE}} - 4.5)$		V
	$I_o = 2\text{A}$	$\pm(\text{dV}_{\text{CE}} - 4.5)$	$\pm(\text{dV}_{\text{CE}} - 3.6)$		V
	$I_o = 0.5\text{A}$	$\pm(\text{dV}_{\text{CE}} - 4)$	$\pm(\text{dV}_{\text{CE}} - 3.2)$		V
Current Peak		9	10		A
AC Performance					
Slew Rate		6	10		V/ μS
Power Bandwidth*	$R_L = 8$, $V_o = 20\text{V}_{\text{rms}}$		55		KHz
Setting Time to 0.1%*	2V Step		2		μS
Capacitive Load*	Specified Temperature Range, $G = 1$	3.3			A
	Specified Temperature Range, $G > 10$			SOA	
Phase Margin*	Specified Temperature Range, $R_L = 8$		40		Degrees
Power Supply					
Power Supply Voltage, $\pm V_s$		± 10	± 35	± 40	V
Current Quiescent -			50	60	mA
Both Amplifiers	Specified Temperature Range		60	70	mA

Thermal Resistance Maximum	Conditions	Standard TO-3	Copper Slug TO-3	Power DIP	Units
q_{jc} (Junction-to-Case)	Both Amplifiers ⁽²⁾ , AC Output $f > 60\text{Hz}$	1.0	.8	.65	$^\circ\text{C/W}$
	Both Amplifiers ⁽²⁾ , DC Output	1.2	1.0	.80	$^\circ\text{C/W}$
	One Amplifier, AC Output $f > 60\text{Hz}$	1.5	1.2	1.00	$^\circ\text{C/W}$
	One Amplifier, DC Output	1.9	1.5	1.15	$^\circ\text{C/W}$
q_{ja} (Junction-to-Ambient)	No Heat Sink	30	30	30	$^\circ\text{C/W}$

NOTES: (1) Input bias and offset current approximately doubles for every 10°C increase in temperature.


(2) Assumes equal dissipation in both amplifiers.

* Guaranteed - not tested 100%.


TYPICAL PERFORMANCE CURVES

$T_A = +25^\circ\text{C}$, $V_S = \pm V_{DC}$ unless otherwise noted


**Input Bias Current
VS Temperature**

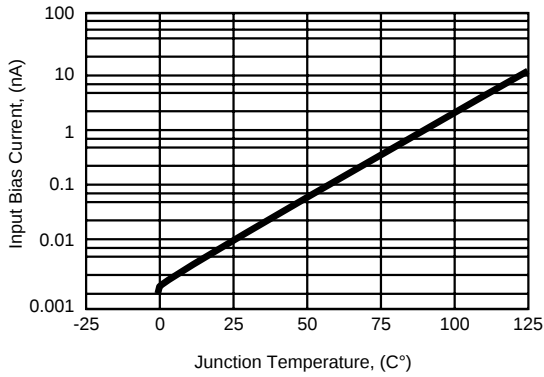


**Open-Loop Gain and
Phase VS Frequency**

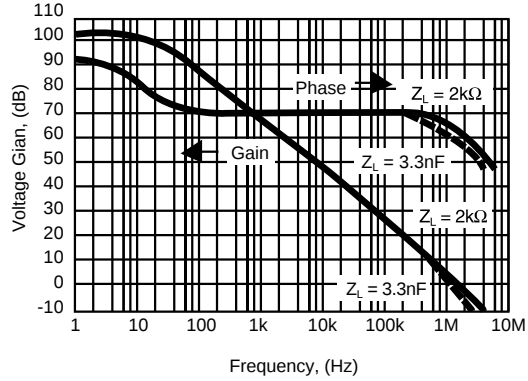


**Normalized Quiescent Current VS
Total Power Supply Voltage**

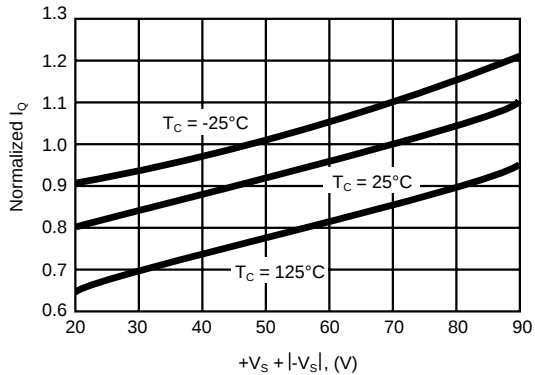


**Output Voltage Swing
VS Output Current**

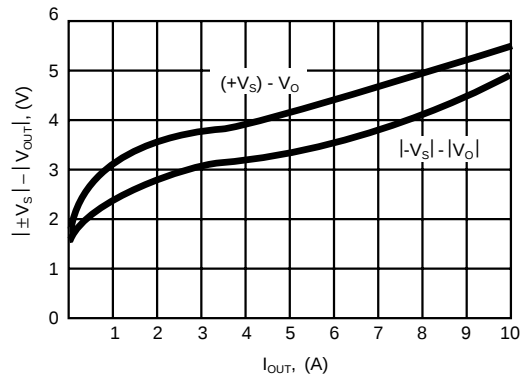

**Voltage Noise Density
VS Frequency**

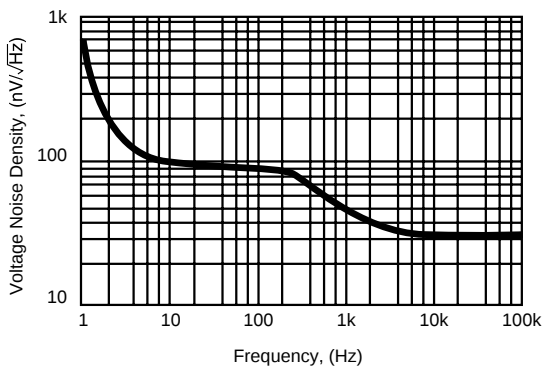


**Total Harmonic Distortion
VS Frequency**

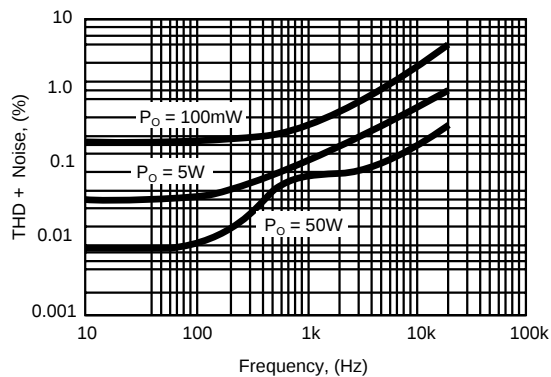


OMA2541SK OMA2541SKC OMA2541SD


Typical Common-Mode Rejection
VS Frequency (Case Dependent)




Typical Output Current
VS Temperature (Case Dependent)




Copper Slug TO-3
Safe Operating Area
OMA2541SKC



Standard TO-3
Safe Operating Area
OMA2541SK

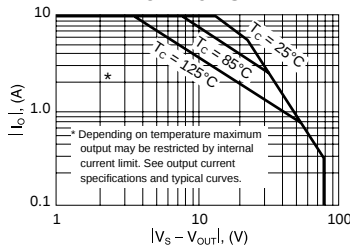


Power DIP
Safe Operating Area
OMA2541SD/SDZ

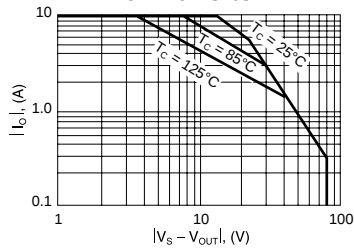


MECHANICAL OUTLINE

D-12

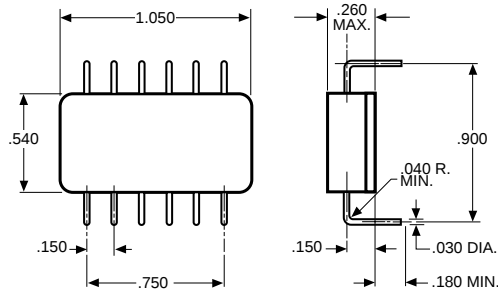

TO-3-8



DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.510	1.550	38.35	39.37
B	.745	.770	18.92	19.56
C	.260	.300	6.60	7.62
D	.038	.042	0.97	1.07
E	.080	.105	2.03	2.67
F	40° BASIC		40° BASIC	
G	.500 BASIC		12.7 BASIC	
H	1.186 BASIC		30.12 BASIC	
J	.593 BASIC		15.06 BASIC	
K	.400	.500	10.16	12.70
Q	.151	.161	3.84	4.09
R	.980	1.020	24.89	25.91

Note: Leads in true position within 0.010" (0.25mm) R at MMC at seating plane.
Pin numbers shown for reference only. Numbers may not be marked on package.