

DIODE MODULE 30A/800V/1000V

PT368 PT3610


FEATURES

- * Isolated Base
- * 3 Phase Bridge Circuit
- * High Surge Capability
- * UL Recognized, File No. E187184

TYPICAL APPLICATIONS

- * Rectified For General Use

OUTLINE DRAWING

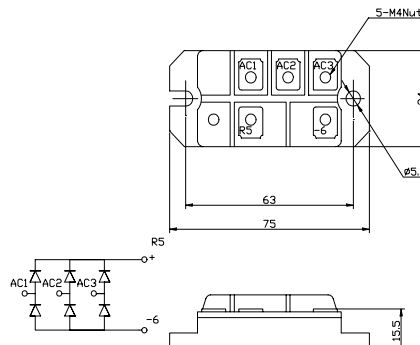

Maximum Ratings

Approx Net Weight:80g

Parameter	Symbol	Type / Grade		Unit
		PT368	PT3610	
Repetitive Peak Reverse Voltage *1	V_{RRM}	800	1000	V
Non Repetitive Peak Reverse Voltage *1	V_{RSM}	960	1100	




Parameter		Conditions	Max Rated Value	Unit
Average Rectified Output Current	$I_{O(AV)}$	3-Phase Full Wave Rectified $T_c=99^{\circ}\text{C}$	36	A
Surge Forward Current *1	I_{FSM}	50 Hz Half Sine Wave, 1Pulse Non-repetitive	400	A
I Squared t *1	I^2t	2msec to 10msec	800	A^2s
Operating Junction Temperature Range	T_{jw}		-40 to +150	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}		-40 to +125	$^{\circ}\text{C}$
Isolation Voltage	Viso	Base Plate to Terminals, AC1min	2000	V
Mounting torque	Case mounting	Ftor	Greased	N.m
	Terminals		M5 Screw	
			M4	1.2 to 1.6

Electrical • Thermal Characteristics


Characteristics	Symbol	Test Conditions	Max.	Unit
Peak Reverse Current *1	I_{RM}	$V_{RM}= V_{RRM}$, $T_j= 150^{\circ}\text{C}$	6	μA
Peak Forward Voltage *1	V_{FM}	$I_{FM}= 36\text{A}$, $T_j=25^{\circ}\text{C}$	1.13	V
Thermal Resistance	$R_{th(j-c)}$	Junction to Case with Thermal Compound (total)	0.7	$^{\circ}\text{C/W}$
	$R_{th(c-f)}$	Case to Fin Total, Greased	0.1	

*1: Value Per 1Arm


PT368/3610 OUTLINE DRAWING (Dimensions in mm)

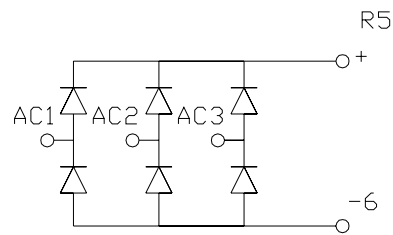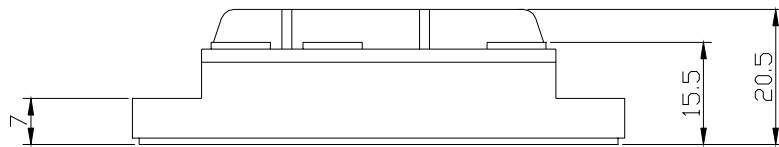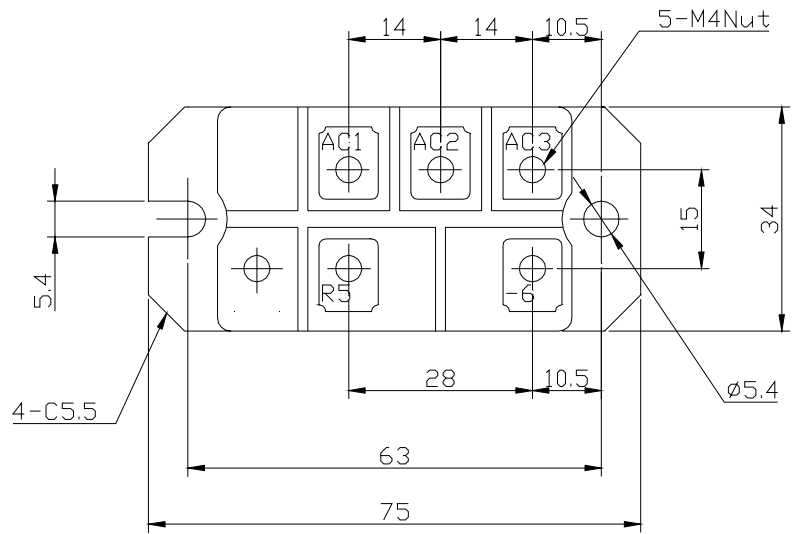


順電圧特性
FORWARD CURRENT VS. VOLTAGE

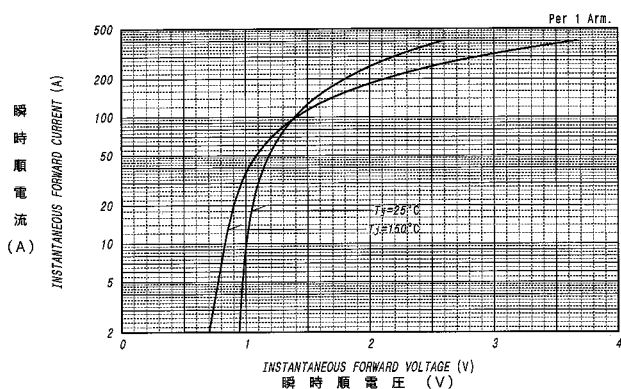

平均順電力損失特性
AVERAGE FORWARD POWER DISSIPATION

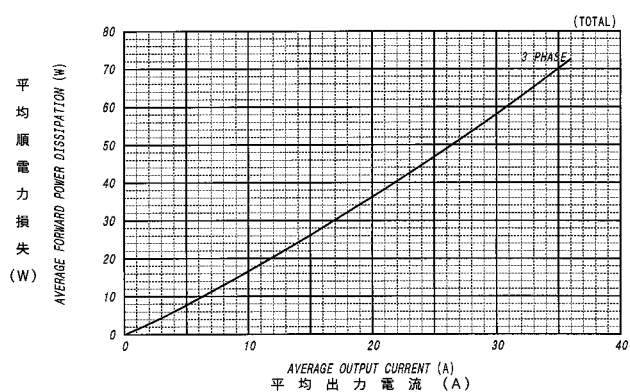

平均出力電流 - ケース温度定格
AVERAGE OUTPUT CURRENT VS. CASE TEMPERATURE

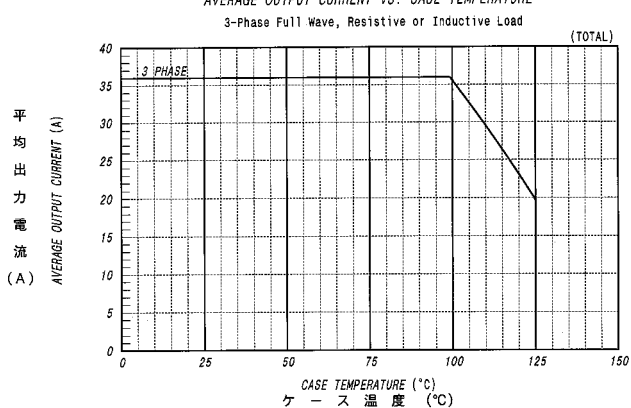

サージ順電流定格
SURGE CURRENT RATINGS

