
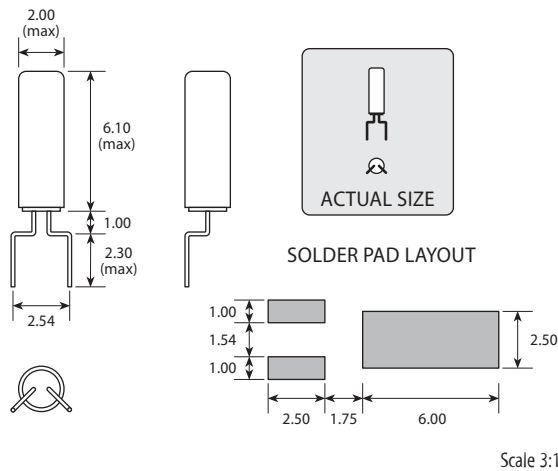


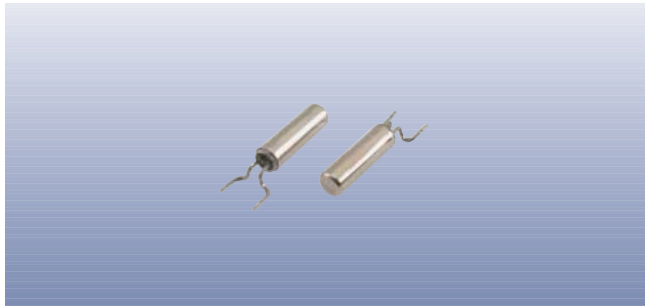

Features

- Low cost
- Formed leads for SM
- Industrial temperature range
- Miniature size for high density applications

Standard Frequencies

Frequencies in kHz		
32.000	65.536	96.000
36.000	75.000	100.000
38.400	76.800	153.600
60.000	77.500	

Specifications

Parameters	Product	Option Codes
	GSCX-26	
Frequency range:	30.0 ~ 165kHz	
Calibration tolerance:	±30ppm Other values	specify
Operating temperature range:	-40 to +85°C	
Storage temperature range:	-55 to +125°C	
Turnover temperature (T ₀):	+25°C ±5°C	
Frequency / temp coefficient:	-0.034 ±0.006ppm/°C ² typ	
Circuit condition:	12.5pF Other values	specify
Static capacitance (C ₀):	0.8 ~ 1.7pF	
Motional capacitance (C ₁):	1 ~ 4fF typ	
Equivalent series resistance (max):	30 ~ 50kΩ	
Ageing:	±5ppm max first year	
Drive level:	1.0μW max	
Soldering condition:	240°C, 10 sec max	

■ Standard. □ Optional - Please specify required code(s) when ordering

Ordering Information

Product name + variant + option code (if any) + frequency + circuit condition (if non-standard)

eg: **GSCX-26 77.50kHz**

GSCX-26 153.60kHz 10pF

Option code X (eg GSCX-26/X) denotes a custom specification.

- ◆ Available on T&R - 3k pcs per reel.
- ◆ Refer to our website for T&R and soldering details.