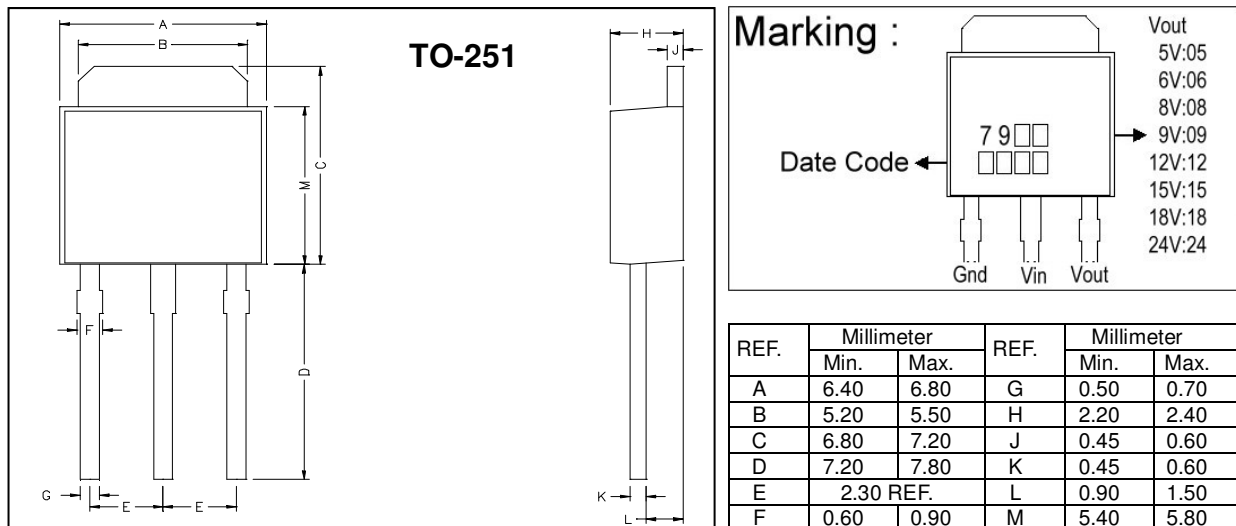


GI79XX**3-TERMINAL NEGATIVE VOLTAGE REGULATORS****Description**

The GI79XX series of fixed-voltage monolithic integrated-circuit voltage regulators are designed to complement Series GI78XX in a wide range of applications. These applications include on-card regulation for elimination of noise and distribution problems associated with single-point regulation. Each of these regulators can deliver up to 1.0 amperes of output current. The internal current limiting and thermal shutdown features of these regulators make them essentially immune to overload. In addition to use as fixed-voltage regulators, these devices can be used with external components to obtain adjustable output voltage and current and also as the power pass element in precision regulators.

Features

- -5V, -6V, -8V, -9V, -12V, -15V, -18V, -24V output voltage available
- Internal Thermal Overload Protection
- Internal Short-Circuit Current Limiting
- No External Components
- Output Transistor Safe-Area Compensation

Package Dimensions**Absolute Maximum Ratings (Ta=25°C)**

Parameter		Ratings	Unit
Input voltage	GI7905 ~ 18	-35V	V
	GI7924	-40V	V
Output current		1.0	A
Operating junction temperature range		0 ~ 150	°C
Storage temperature range		-55 ~ 150	°C
Thermal resistance junction-air (RθJA)		125	°C/W
Thermal resistance junction-cases (RθJC)		12.5	°C/W

Electrical Characteristics

GI7905 (Refer to the test circuits, $T_j=0\sim 125^{\circ}\text{C}$, $I_o=500\text{mA}$, $V_{in}=-10\text{V}$, $C_{in}=2.2\mu\text{F}$, $C_o=1\mu\text{F}$ unless otherwise specified)

Symbol		Min.	Typ.	Max.	Unit	Test Conditions
VO	A-Rank (3%)	-4.85	-5.0	-5.15	V	$V_{in}=-10\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
	B-Rank (5%)	-4.75	-	-5.25		$-7\text{V} \leq V_{in} \leq -20\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$, $\text{PD} \leq 15\text{W}$
ΔVO (Line Regulation)		-	10	50	mV	$-7\text{V} \leq V_{in} \leq -25\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
		-	-	25		$-8\text{V} \leq V_{in} \leq -12\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
ΔVO (Load Regulation)		-	10	100	mV	$V_{in}=-10\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$, $T_j=25^{\circ}\text{C}$
		-	3	50		$V_{in}=-10\text{V}$, $250\text{mA} \leq I_o \leq 750\text{mA}$, $T_j=25^{\circ}\text{C}$
IQ		-	-	6.0	mA	$V_{in}=-10\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
ΔIQ		-	-	0.5	mA	$V_{in}=-10\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$
		-	-	1.3		$-7\text{V} \leq V_{in} \leq -25\text{V}$, $I_o=500\text{mA}$
Vn		-	100	-	μV	$10\text{Hz} \leq f \leq 100\text{KHz}$, $T_a=25^{\circ}\text{C}$
RR		54	-	-	dB	$-8\text{V} \leq V_{in} \leq -18\text{V}$, $f=120\text{Hz}$, $T_j=25^{\circ}\text{C}$
VD		-	2	-	V	$I_o=1\text{A}$, $T_j=25^{\circ}\text{C}$
Ipk		-	2.2	-	A	$T_j=25^{\circ}\text{C}$
$\Delta\text{Vo} / \Delta T_j$		-	-0.4	-	$\text{mV}/^{\circ}\text{C}$	$I_o=5\text{mA}$, $0^{\circ}\text{C} \leq T_j \leq 125^{\circ}\text{C}$

GI7906 (Refer to the test circuits, $T_j=0\sim 125^{\circ}\text{C}$, $I_o=500\text{mA}$, $V_{in}=-11\text{V}$, $C_{in}=2.2\mu\text{F}$, $C_o=1\mu\text{F}$ unless otherwise specified)

Symbol		Min.	Typ.	Max.	Unit	Test Conditions
VO	A-Rank (3%)	-5.82	-6.0	-6.18	V	$V_{in}=-11\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
	B-Rank (5%)	-5.70	-	-6.30		$-8\text{V} \leq V_{in} \leq -21\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$, $\text{PD} \leq 15\text{W}$
ΔVO (Line Regulation)		-	10	120	mV	$-8\text{V} \leq V_{in} \leq -25\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
		-	5	60		$-9\text{V} \leq V_{in} \leq -13\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
ΔVO (Load Regulation)		-	10	120	mV	$V_{in}=-11\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$, $T_j=25^{\circ}\text{C}$
		-	3	60		$V_{in}=-11\text{V}$, $250\text{mA} \leq I_o \leq 750\text{mA}$, $T_j=25^{\circ}\text{C}$
IQ		-	-	6.0	mA	$V_{in}=-11\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
ΔIQ		-	-	0.5	mA	$V_{in}=-11\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$
		-	-	1.3		$-8\text{V} \leq V_{in} \leq -25\text{V}$, $I_o=500\text{mA}$
Vn		-	130	-	μV	$10\text{Hz} \leq f \leq 100\text{KHz}$, $T_a=25^{\circ}\text{C}$
RR		54	-	-	Db	$-9\text{V} \leq V_{in} \leq -19\text{V}$, $f=120\text{Hz}$, $T_j=25^{\circ}\text{C}$
VD		-	2	-	V	$I_o=1\text{A}$, $T_j=25^{\circ}\text{C}$
Ipk		-	2.2	-	A	$T_j=25^{\circ}\text{C}$
$\Delta\text{Vo} / \Delta T_j$		-	-0.5	-	$\text{mV}/^{\circ}\text{C}$	$I_o=5\text{mA}$, $0^{\circ}\text{C} \leq T_j \leq 125^{\circ}\text{C}$

GI7908 (Refer to the test circuits, $T_j=0\sim 125^{\circ}\text{C}$, $I_o=500\text{mA}$, $V_{in}=-14\text{V}$, $C_{in}=2.2\mu\text{F}$, $C_o=1\mu\text{F}$ unless otherwise specified)

Symbol		Min.	Typ.	Max.	Unit	Test Conditions
VO	A-Rank (3%)	-7.76	-8.0	-8.24	V	$V_{in}=-14\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
	B-Rank (5%)	-7.60	-	-8.40		$-10.5\text{V} \leq V_{in} \leq -23\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$, $PD \leq 15\text{W}$
ΔVO (Line Regulation)		-	10	160	mV	$-10.5\text{V} \leq V_{in} \leq -25\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
		-	5	80		$-11.5\text{V} \leq V_{in} \leq -17\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
ΔVO (Load Regulation)		-	12	160	mV	$V_{in}=-14\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$, $T_j=25^{\circ}\text{C}$
		-	4	80		$V_{in}=-14\text{V}$, $250\text{mA} \leq I_o \leq 750\text{mA}$, $T_j=25^{\circ}\text{C}$
IQ		-	-	6.0	mA	$V_{in}=-14\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
ΔIQ		-	-	0.5	mA	$V_{in}=-14\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$
		-	-	1.0		$-11.5\text{V} \leq V_{in} \leq -25\text{V}$, $I_o=500\text{mA}$
Vn		-	175	-	μV	$10\text{Hz} \leq f \leq 100\text{KHz}$, $T_a=25^{\circ}\text{C}$
RR		54	-	-	dB	$-11.5\text{V} \leq V_{in} \leq -21.5\text{V}$, $f=120\text{Hz}$, $T_j=25^{\circ}\text{C}$
VD		-	2	-	V	$I_o=1\text{A}$, $T_j=25^{\circ}\text{C}$
Ipk		-	2.2	-	A	$T_j=25^{\circ}\text{C}$
$\Delta VO / \Delta T_j$		-	-0.6	-	$\text{mV}/^{\circ}\text{C}$	$I_o=5\text{mA}$, $0^{\circ}\text{C} \leq T_j \leq 125^{\circ}\text{C}$

GI7909 (Refer to the test circuits, $T_j=0\sim 125^{\circ}\text{C}$, $I_o=500\text{mA}$, $V_{in}=-15\text{V}$, $C_{in}=2.2\mu\text{F}$, $C_o=1\mu\text{F}$ unless otherwise specified)

Symbol		Min.	Typ.	Max.	Unit	Test Conditions
VO	A-Rank (3%)	-8.73	-9.0	-9.27	V	$V_{in}=-15\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
	B-Rank (5%)	-8.55	-	-9.45		$-11.5\text{V} \leq V_{in} \leq -23\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$, $PD \leq 15\text{W}$
ΔVO (Line Regulation)		-	10	180	mV	$-11.5\text{V} \leq V_{in} \leq -26\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
		-	5	90		$-12\text{V} \leq V_{in} \leq -18\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
ΔVO (Load Regulation)		-	12	180	mV	$V_{in}=-15\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$, $T_j=25^{\circ}\text{C}$
		-	4	90		$V_{in}=-15\text{V}$, $250\text{mA} \leq I_o \leq 750\text{mA}$, $T_j=25^{\circ}\text{C}$
IQ		-	-	6.0	mA	$V_{in}=-15\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
ΔIQ		-	-	0.5	mA	$V_{in}=-15\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$
		-	-	1.0		$-11.5\text{V} \leq V_{in} \leq -26\text{V}$, $I_o=500\text{mA}$
Vn		-	175	-	μV	$10\text{Hz} \leq f \leq 100\text{KHz}$, $T_a=25^{\circ}\text{C}$
RR		54	-	-	dB	$-12.5\text{V} \leq V_{in} \leq -22.5\text{V}$, $f=120\text{Hz}$, $T_j=25^{\circ}\text{C}$
VD		-	2	-	V	$I_o=1\text{A}$, $T_j=25^{\circ}\text{C}$
Ipk		-	2.2	-	A	$T_j=25^{\circ}\text{C}$
$\Delta VO / \Delta T_j$		-	-0.6	-	$\text{mV}/^{\circ}\text{C}$	$I_o=5\text{mA}$, $0^{\circ}\text{C} \leq T_j \leq 125^{\circ}\text{C}$

GI7912 (Refer to the test circuits, $T_j=0\sim 125^{\circ}\text{C}$, $I_o=500\text{mA}$, $V_{in}=-19\text{V}$, $C_{in}=2.2\mu\text{F}$, $C_o=1\mu\text{F}$ unless otherwise specified)

Symbol		Min.	Typ.	Max.	Unit	Test Conditions
VO	A-Rank (3%)	-11.64	-12.0	-12.36	V	$V_{in}=-19\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
	B-Rank (5%)	-11.40	-	-12.60		$-14.5\text{V} \leq V_{in} \leq -27\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$, $\text{PD} \leq 15\text{W}$
ΔVO (Line Regulation)		-	12	240	mV	$-14.5\text{V} \leq V_{in} \leq -30\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
		-	6	120		$-16\text{V} \leq V_{in} \leq -22\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
ΔVO (Load Regulation)		-	12	240	mV	$V_{in}=-19\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$, $T_j=25^{\circ}\text{C}$
		-	4	120		$V_{in}=-19\text{V}$, $250\text{mA} \leq I_o \leq 750\text{mA}$, $T_j=25^{\circ}\text{C}$
IQ		-	-	6.0	mA	$V_{in}=-19\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
ΔIQ		-	-	0.5	mA	$V_{in}=-19\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$
		-	-	1.0		$-14.5\text{V} \leq V_{in} \leq -30\text{V}$, $I_o=500\text{mA}$
Vn		-	200	-	μV	$10\text{Hz} \leq f \leq 100\text{KHz}$, $T_a=25^{\circ}\text{C}$
RR		54	-	-	dB	$-15\text{V} \leq V_{in} \leq -25\text{V}$, $f=120\text{Hz}$, $T_j=25^{\circ}\text{C}$
VD		-	2	-	V	$I_o=1\text{A}$, $T_j=25^{\circ}\text{C}$
Ipk		-	2.2	-	A	$T_j=25^{\circ}\text{C}$
$\Delta\text{Vo} / \Delta\text{Tj}$		-	-0.8	-	$\text{mV}/^{\circ}\text{C}$	$I_o=5\text{mA}$, $0^{\circ}\text{C} \leq T_j \leq 125^{\circ}\text{C}$

GI7915 (Refer to the test circuits, $T_j=0\sim 125^{\circ}\text{C}$, $I_o=500\text{mA}$, $V_{in}=-23\text{V}$, $C_{in}=2.2\mu\text{F}$, $C_o=1\mu\text{F}$ unless otherwise specified)

Symbol		Min.	Typ.	Max.	Unit	Test Conditions
VO	A-Rank (3%)	-14.55	-15.0	-15.45	V	$V_{in}=-23\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
	B-Rank (5%)	-14.25	-	-15.75		$-17.5\text{V} \leq V_{in} \leq -30\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$, $\text{PD} \leq 15\text{W}$
ΔVO (Line Regulation)		-	12	300	mV	$-17.5\text{V} \leq V_{in} \leq -30\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
		-	6	150		$-20\text{V} \leq V_{in} \leq -26\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
ΔVO (Load Regulation)		-	12	300	mV	$V_{in}=-23\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$, $T_j=25^{\circ}\text{C}$
		-	4	150		$V_{in}=-23\text{V}$, $250\text{mA} \leq I_o \leq 750\text{mA}$, $T_j=25^{\circ}\text{C}$
IQ		-	-	6.0	mA	$V_{in}=-23\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
ΔIQ		-	-	0.5	mA	$V_{in}=-23\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$
		-	-	1.0		$-17.5\text{V} \leq V_{in} \leq -30.5\text{V}$, $I_o=500\text{mA}$
Vn		-	250	-	μV	$10\text{Hz} \leq f \leq 100\text{KHz}$, $T_a=25^{\circ}\text{C}$
RR		54	-	-	dB	$-18.5\text{V} \leq V_{in} \leq -28.5\text{V}$, $f=120\text{Hz}$, $T_j=25^{\circ}\text{C}$
VD		-	2	-	V	$I_o=1\text{A}$, $T_j=25^{\circ}\text{C}$
Ipk		-	2.2	-	A	$T_j=25^{\circ}\text{C}$
$\Delta\text{Vo} / \Delta\text{Tj}$		-	-0.9	-	$\text{mV}/^{\circ}\text{C}$	$I_o=5\text{mA}$, $0^{\circ}\text{C} \leq T_j \leq 125^{\circ}\text{C}$


GI7918 (Refer to the test circuits, $T_j=0\sim 125^{\circ}\text{C}$, $I_o=500\text{mA}$, $V_{in}=-27\text{V}$, $C_{in}=2.2\mu\text{F}$, $C_o=1\mu\text{F}$ unless otherwise specified)

Symbol		Min.	Typ.	Max.	Unit	Test Conditions
VO	A-Rank (3%)	-17.46	-18.0	-18.54	V	$V_{in}=-27\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$ $-21\text{V} \leq V_{in} \leq -33\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$, $\text{PD} \leq 15\text{W}$
	B-Rank (5%)	-17.10	-	-18.9		
ΔVO (Line Regulation)		-	15	360	mV	$-21\text{V} \leq V_{in} \leq -33\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
		-	8	180		$-24\text{V} \leq V_{in} \leq -30\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
ΔVO (Load Regulation)		-	15	360	mV	$V_{in}=-27\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$, $T_j=25^{\circ}\text{C}$
		-	5	180		$V_{in}=-27\text{V}$, $250\text{mA} \leq I_o \leq 750\text{mA}$, $T_j=25^{\circ}\text{C}$
IQ		-	-	6.0	mA	$V_{in}=-27\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
ΔIQ		-	-	0.5	mA	$V_{in}=-27\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$
		-	-	1.0		$-21\text{V} \leq V_{in} \leq -33\text{V}$, $I_o=500\text{mA}$
V_n		-	300	-	μV	$10\text{Hz} \leq f \leq 100\text{KHz}$, $T_a=25^{\circ}\text{C}$
RR		54	-	-	dB	$-22\text{V} \leq V_{in} \leq -32\text{V}$, $f=120\text{Hz}$, $T_j=25^{\circ}\text{C}$
VD		-	2	-	V	$I_o=1\text{A}$, $T_j=25^{\circ}\text{C}$
I_{pk}		-	2.2	-	A	$T_j=25^{\circ}\text{C}$
$\Delta\text{Vo} / \Delta\text{Tj}$		-	-1.0	-	$\text{mV}/^{\circ}\text{C}$	$I_o=5\text{mA}$, $0^{\circ}\text{C} \leq T_j \leq 125^{\circ}\text{C}$

GI7924 (Refer to the test circuits, $T_j=0\sim 125^{\circ}\text{C}$, $I_o=500\text{mA}$, $V_{in}=-33\text{V}$, $C_{in}=2.2\mu\text{F}$, $C_o=1\mu\text{F}$ unless otherwise specified)

Symbol		Min.	Typ.	Max.	Unit	Test Conditions
VO	A-Rank (3%)	-23.28	-24.0	-24.72	V	$V_{in}=-33\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$ $-27\text{V} \leq V_{in} \leq -38\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$, $\text{PD} \leq 15\text{W}$
	B-Rank (5%)	-22.80	-	-25.20		
ΔVO (Line Regulation)		-	15	480	mV	$-27\text{V} \leq V_{in} \leq -38\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
		-	8	240		$-30\text{V} \leq V_{in} \leq -36\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
ΔVO (Load Regulation)		-	15	480	mV	$V_{in}=-33\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$, $T_j=25^{\circ}\text{C}$
		-	5	240		$V_{in}=-33\text{V}$, $250\text{mA} \leq I_o \leq 750\text{mA}$, $T_j=25^{\circ}\text{C}$
IQ		-	-	6.0	mA	$V_{in}=-33\text{V}$, $I_o=500\text{mA}$, $T_j=25^{\circ}\text{C}$
ΔIQ		-	-	0.5	mA	$V_{in}=-33\text{V}$, $5\text{mA} \leq I_o \leq 1\text{A}$
		-	-	1.0		$-27\text{V} \leq V_{in} \leq -38\text{V}$, $I_o=500\text{mA}$
V_n		-	400	-	μV	$10\text{Hz} \leq f \leq 100\text{KHz}$, $T_a=25^{\circ}\text{C}$
RR		54	-	-	dB	$-28\text{V} \leq V_{in} \leq -38\text{V}$, $f=120\text{Hz}$, $T_j=25^{\circ}\text{C}$
VD		-	2	-	V	$I_o=1\text{A}$, $T_j=25^{\circ}\text{C}$
I_{pk}		-	2.2	-	A	$T_j=25^{\circ}\text{C}$
$\Delta\text{Vo} / \Delta\text{Tj}$		-	-1.0	-	$\text{mV}/^{\circ}\text{C}$	$I_o=5\text{mA}$, $0^{\circ}\text{C} \leq T_j \leq 125^{\circ}\text{C}$

Typical Application

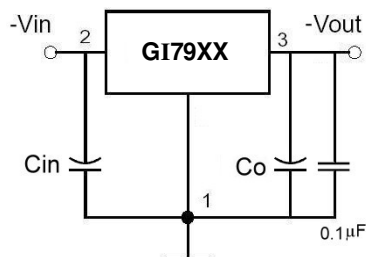

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

Head Office And Factory:

- **Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- **China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165