



1A Low-Dropout Linear Regulator

Features

- Available in 1.5V, 1.8V, 2.5V, 3.3V, 3.5V Version
- Space Saving SOT-223 Package
- Internal Short Circuit Current Limiting
- Internal Over Temperature Protection
- Output Current in Excess of 1A

Applications

- Post Regulation for Switching DC/DC Converter
- High Efficiency Linear Regulator
- Battery Charger
- Battery Powered Instrumentation
- Motherboard

General Description

The G1117-XX is a low dropout linear regulator with a dropout of 1.3V at 1A of load current. It is available in four fixed voltage: 1.5V, 1.8V, 2.5V, 3.3 and 3.5V versions.

The G1117-XX provides over temperature and over current protection circuits to prevent it from being damaged by abnormal operating conditions.


The G1117-XX is available in SOT-223 packages. A minimum of 10 μ F tantalum electrolytic capacitor is required at the output to improve the transient response and stability.

Ordering Information

| ORDER NUMBER | ORDER NUMBER (Pb free) | MARKING | TEMP. RANGE | PACKAGE | PIN OPTION | | |
|--------------|------------------------|---------|-------------|---------|------------|------------------|-----------------|
| | | | | | 1 | 2 | 3 |
| G1117-15T43U | G1117-15T43Uf | 1117-15 | -40°C~85°C | TO-252 | GND | V _{OUT} | V _{IN} |
| G1117-18T43U | G1117-18T43Uf | 1117-18 | -40°C~85°C | TO-252 | GND | V _{OUT} | V _{IN} |
| G1117-25T43U | G1117-25T43Uf | 1117-25 | -40°C~85°C | TO-252 | GND | V _{OUT} | V _{IN} |
| G1117-33T43U | G1117-33T43Uf | 1117-33 | -40°C~85°C | TO-252 | GND | V _{OUT} | V _{IN} |
| G1117-35T43U | G1117-35T43Uf | 1117-35 | -40°C~85°C | TO-252 | GND | V _{OUT} | V _{IN} |
| G1117-15T63U | G1117-15T63Uf | 1117-15 | -40°C~85°C | SOT-223 | GND | V _{OUT} | V _{IN} |
| G1117-18T63U | G1117-18T63Uf | 1117-18 | -40°C~85°C | SOT-223 | GND | V _{OUT} | V _{IN} |
| G1117-25T63U | G1117-25T63Uf | 1117-25 | -40°C~85°C | SOT-223 | GND | V _{OUT} | V _{IN} |
| G1117-33T63U | G1117-33T63Uf | 1117-33 | -40°C~85°C | SOT-223 | GND | V _{OUT} | V _{IN} |
| G1117-35T63U | G1117-35T63Uf | 1117-35 | -40°C~85°C | SOT-223 | GND | V _{OUT} | V _{IN} |

* For other package types and pin options, please contact us at sales@gmt.com.tw

Order Number Identification

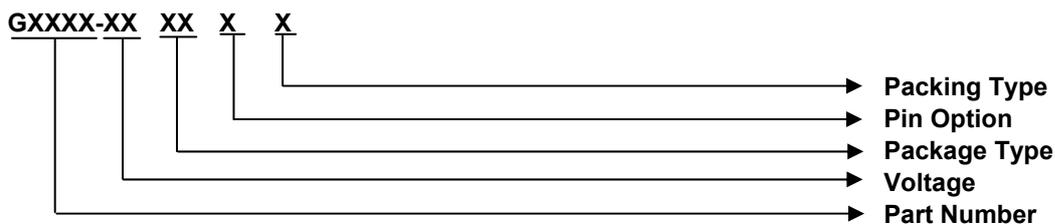

PACKAGE TYPE

T4: TO-252
T6: SOT-223


PIN OPTION

1 2 3
3: GND V_{OUT} V_{IN}

PACKING


U : Tape & Reel

Package Type



Typical Application

[Note 4]: Type of C_{OUT}

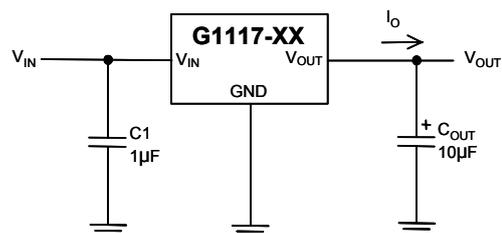

**Absolute Maximum Ratings** (Note 1)

| | |
|---|--|
| Input Voltage | 7V |
| Power Dissipation Internally Limited | (Note 2) |
| Maximum Junction Temperature | 150°C |
| Storage Temperature Range | $-65^{\circ}\text{C} \leq T_J \leq +150^{\circ}\text{C}$ |
| Reflow Temperature (soldering, 10sec) | 260°C |
| Thermal Resistance Junction to Ambient, (θ_{JA}) | |
| SOT-223 ⁽¹⁾ | 116°C/W |
| TO-252 ⁽¹⁾ | 86°C/W |
| Thermal Resistance Junction to Case, (θ_{JC}) | |
| SOT-223 | 21°C/W |
| TO-252 | 10°C/W |

Note ⁽¹⁾: See Recommended Minimum Footprint

Operating Conditions (Note 1)

| | |
|-------------------|--|
| Input Voltage | 3V~6V |
| Temperature Range | $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ |

Electrical Characteristics

Operating Conditions: $V_{IN} \leq 6V$, $T_J = 25^{\circ}\text{C}$ unless otherwise specified. [Note3]

| PARAMETER | CONDITION | MIN | TYP | MAX | UNIT |
|---|---|-----|-------|-----|------|
| Output Voltage | $10\text{mA} \leq I_{OUT} \leq 1\text{A}$ | 2% | V_O | 3% | V |
| Line Regulation | $(V_{OUT} + 1.5V) \leq V_{IN} \leq 6V$, $I_{OUT} = 10\text{mA}$ | --- | 3 | 30 | mV |
| Load Regulation | $V_{IN} = 5V$, $10\text{mA} \leq I_{OUT} \leq 1\text{A}$ | --- | 35 | 50 | mV |
| Dropout Voltage | $\Delta V_{OUT} = 2\%$, $I_{OUT} = 1\text{A}$ | --- | 1.3 | 1.4 | V |
| Short Circuit Current | | --- | 1.6 | --- | A |
| Quiescent Current | | 0.3 | 0.6 | 1.5 | mA |
| Ripple Rejection | $f = 120\text{Hz}$, $C_{OUT} = 10\mu\text{F}$ Tantalum, $V_{ripple} = 2V_{P-P}$, $I_{OUT} = 100\text{mA}$ | --- | 50 | --- | dB |
| Thermal Resistor Junction-to-Ambient (No heat sink; No air flow) | SOT-223; Recommended Minimum Footprint | --- | 116 | --- | °C/W |
| Thermal Shutdown | Junction Temperature | --- | 150 | --- | °C |

Note 1: Absolute Maximum Ratings are limits beyond which damage to the device may occur. Operating Conditions are conditions under which the device functions but the specifications might not be guaranteed. For guaranteed specifications and test conditions see the Electrical Characteristics.

Note2: The maximum power dissipation is a function of the maximum junction temperature, T_{Jmax} ; total thermal resistance, θ_{JA} , and ambient temperature T_A . The maximum allowable power dissipation at any ambient temperature is $T_{Jmax} - T_A / \theta_{JA}$. If this dissipation is exceeded, the die temperature will rise above 150°C and IC will go into thermal shutdown. For the G1117-XX in SOT-223 package; θ_{JA} is 116°C/W; in the TO-252 package, θ_{JA} is 86°C/W (See recommend minimum footprint). The safe operation in SOT-223, TO-252 package, it can see "Typical Performance Characteristics" (Safe Operating Area).

Note3: Low duty pulse techniques are used during test to maintain junction temperature as close to ambient as possible.

Note4: The type of output capacitor should be tantalum or aluminum.

Definitions**Output Voltage**

The G1117-XX provides in four fixed voltages = 1.5V, 1.8V, 2.5V, 3.3V and 3.5V. Its quiescent current is typically 600µA.

Dropout Voltage

The input/output Voltage differential at which the regulator output no longer maintains regulation against further reductions in input voltage. Measured when the output drops 2% below its nominal value. Dropout voltage is affected by junction temperature, load current and minimum input supply requirements.

Line Regulation

The change in output voltage for a change in input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that average chip temperature is not significantly affected.

Load Regulation

The change in output voltage for a change in load current at constant chip temperature. The measurement is made under conditions of low dissipation or by using pulse techniques such that average chip temperature is not significantly affected.

Maximum Power Dissipation

The maximum total device dissipation for which the regulator will operate within specifications.

Quiescent Bias Current


Current which is used to operate the regulator chip and is not delivered to the load.




Typical Performance Characteristics

V_{IN}= 5V, C_{IN}=1μF, C_{OUT}=10μF, T_A=25°C, unless otherwise noted. (G1117-25)


Line Transient

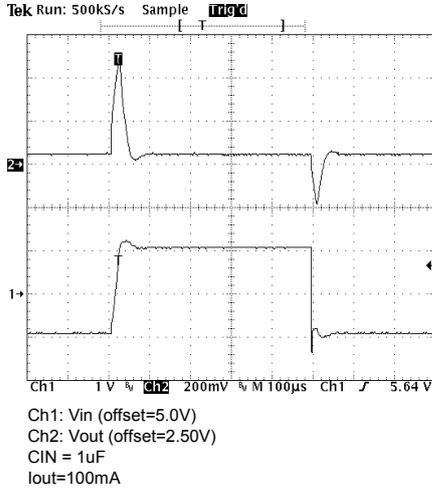


Load Transient

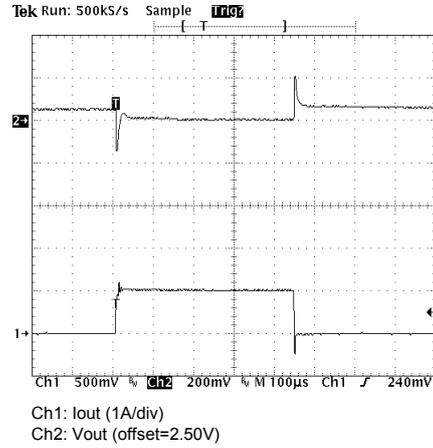


Output Voltage vs. Load Current

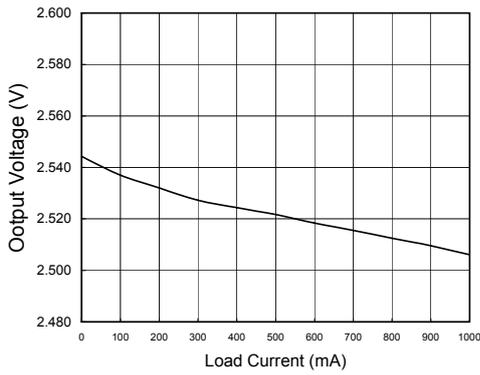





Dropout Voltage vs. Load Current

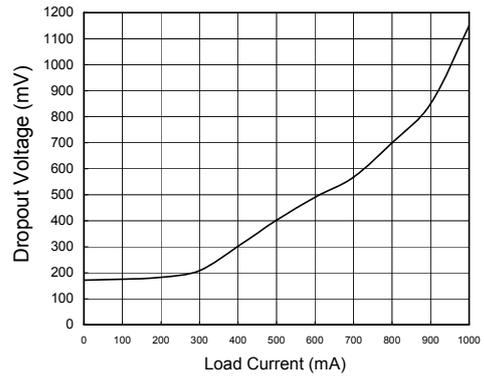


Ground Current vs. Load Current

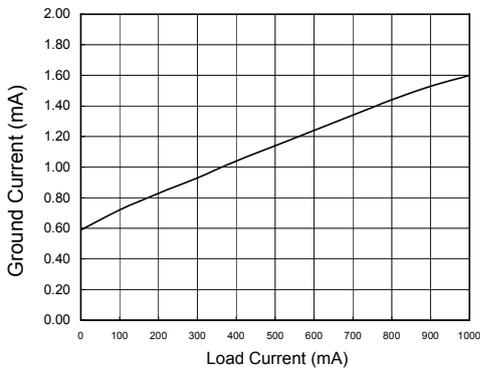

Typical Performance Characteristics (continued)

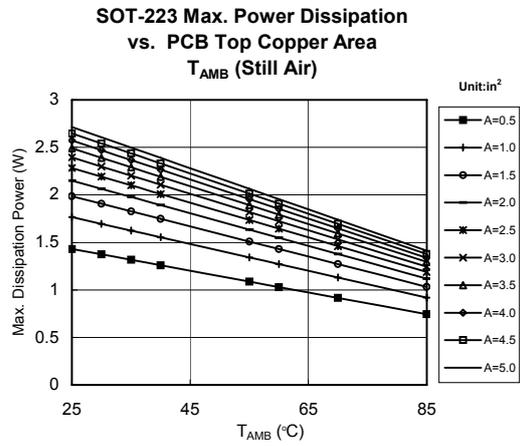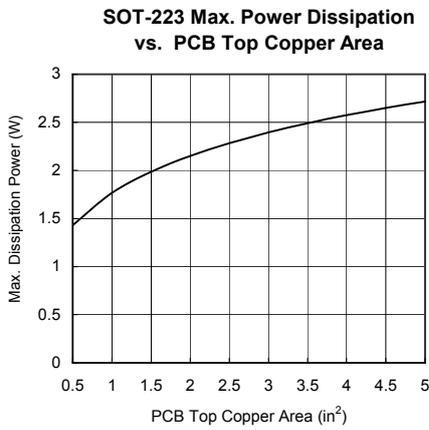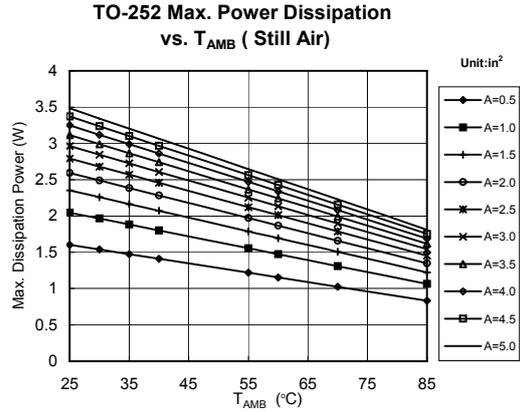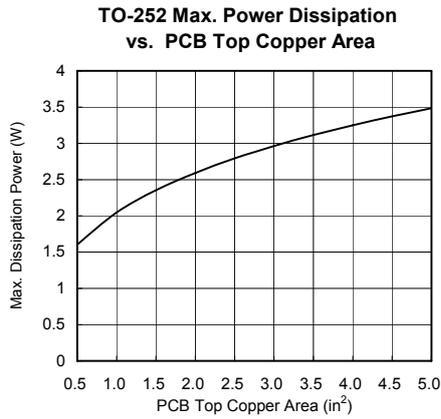


Recommend Minimum Footprint

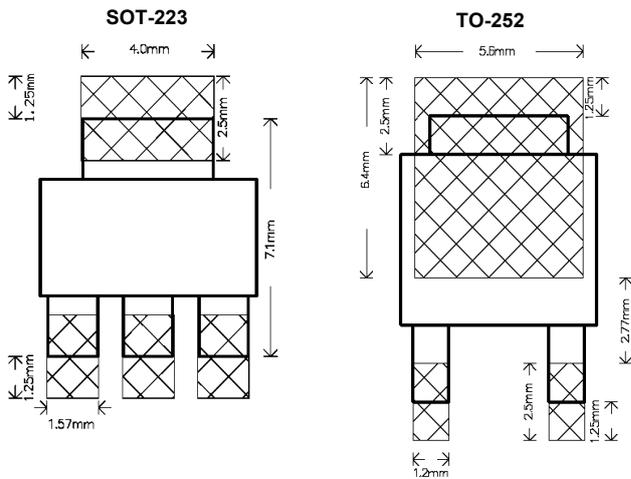






Package Information

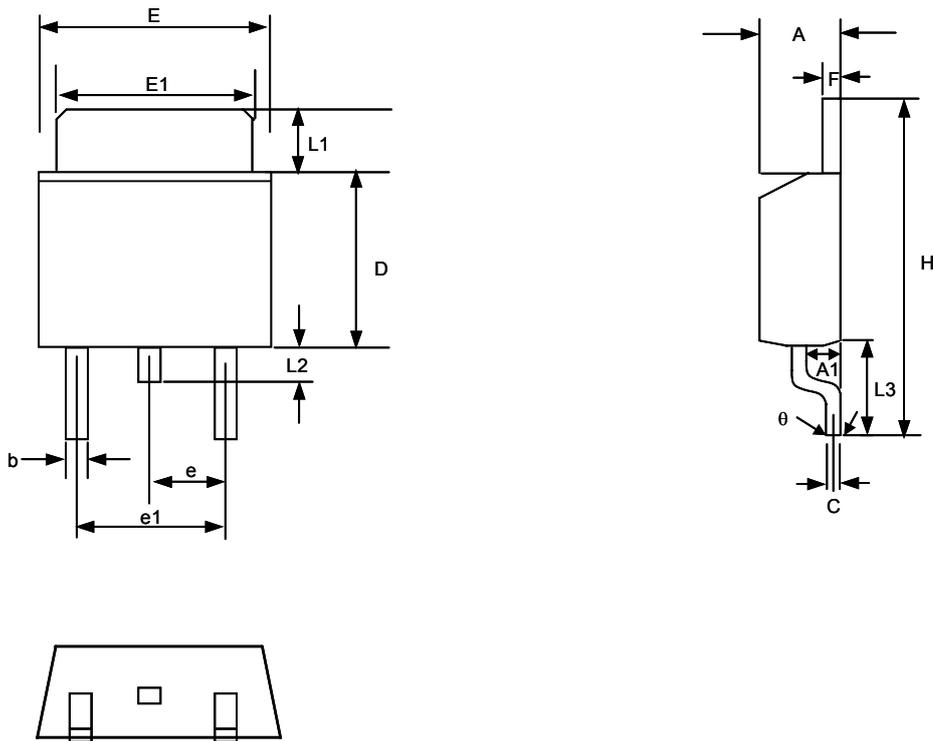

TO-252 (T4) Package



| SYMBOL | MILLIMETERS | | INCHES | |
|--------|-------------|-------|---------|-------|
| | MIN. | MAX. | MIN. | MAX. |
| A | 2.19 | 2.38 | 0.086 | 0.094 |
| A1 | 0.89 | 1.27 | 0.035 | 0.050 |
| b | 0.64 | 0.89 | 0.025 | 0.035 |
| C | 0.46 | 0.58 | 0.018 | 0.023 |
| D | 5.97 | 6.22 | 0.235 | 0.245 |
| E | 6.35 | 6.73 | 0.250 | 0.265 |
| E1 | 5.21 | 5.46 | 0.205 | 0.215 |
| e | 2.26BSC | | 0.09BSC | |
| e1 | 3.96 | 5.18 | 0.156 | 0.204 |
| F | 0.46 | 0.58 | 0.018 | 0.023 |
| L1 | 0.89 | 2.03 | 0.035 | 0.080 |
| L2 | 0.64 | 1.02 | 0.025 | 0.040 |
| L3 | 2.40 | 2.80 | 0.095 | 0.110 |
| H | 9.40 | 10.40 | 0.370 | 0.410 |
| θ | 0° | 4° | 0° | 4° |

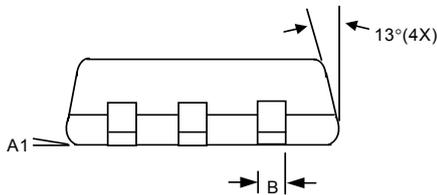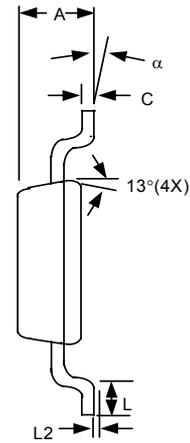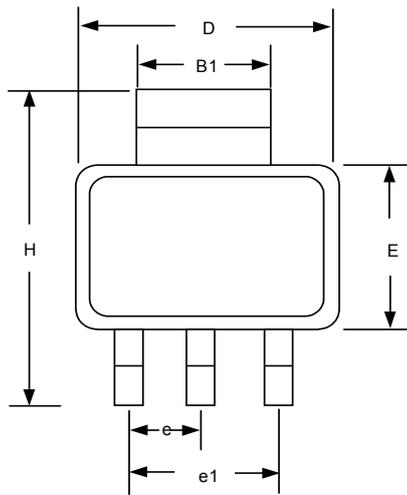

SOT-223 (T6) Package

| SYMBOLS | MILLIMETERS | | INCHES | |
|----------|-------------|------|------------|--------|
| | MIN | MAX | MIN | MAX |
| A | 1.55 | 1.80 | 0.061 | 0.071 |
| A1 | 0.02 | 0.12 | 0.0008 | 0.0047 |
| B | 0.60 | 0.80 | 0.024 | 0.031 |
| B1 | 2.90 | 3.10 | 0.114 | 0.122 |
| C | 0.24 | 0.32 | 0.009 | 0.013 |
| D | 6.30 | 6.70 | 0.248 | 0.264 |
| E | 3.30 | 3.70 | 0.130 | 0.146 |
| e | 2.30 BSC | | 0.090 BSC | |
| e1 | 4.60 BSC | | 0.181 BSC | |
| H | 6.70 | 7.30 | 0.264 | 0.287 |
| L | 0.90 MIN | | 0.036 MIN | |
| L2 | 0.06 BSC | | 0.0024 BSC | |
| α | 0° | 10° | 0° | 10° |

Taping Specification



| PACKAGE | Q'TY/REEL |
|---------|-----------|
| SOT-223 | 2,500 ea |
| TO-252 | 2,500 ea |

GMT Inc. does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and GMT Inc. reserves the right at any time without notice to change said circuitry and specifications.