


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032


FP34-340.DC2

EIA-17-YVWW
XXX B10

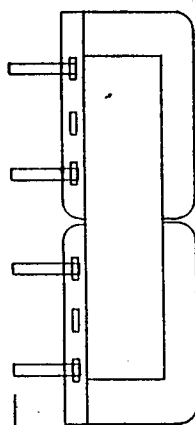



.250
REF

1.07
REF

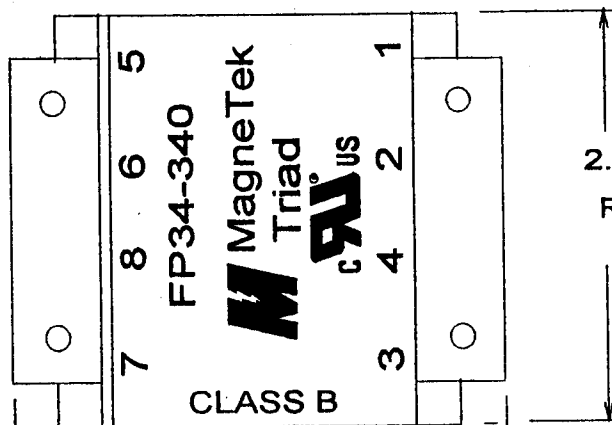

2.00
REF

2.50
REF

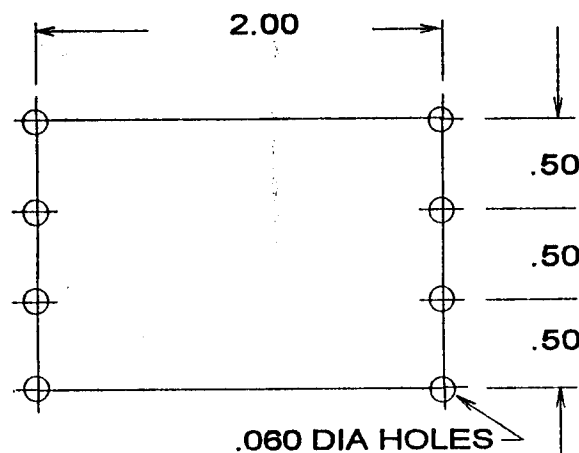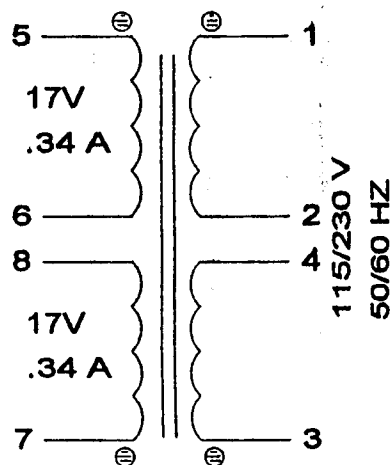

PRODUCTION TESTS

URNS RATIO = 100%

DC RESISTANCE IN OHMS NOM	1-2 = 114 TO 140
	3-4 = 114 TO 140
	5-6 = 3.87 TO 4.73
	7-8 = 3.87 TO 4.73

MAX EXCITATION CURRENT = .022 A

APPLY = 230V, 60 HZ, 1-4, TIE 2+3

1-2 = 3-4 = 115V

EACH SEC = 19.8 TO 20.6 V

HIPOT: 2000V PRI'S TO SEC'S

1500V PRI'S, SEC'S TO CORE

500V P-P, S-S

MagneTek

PART NO. FP34-340