
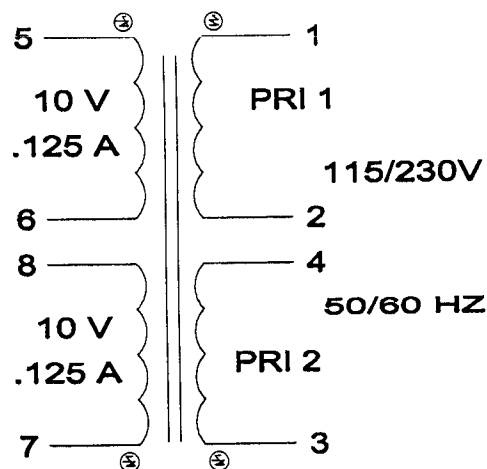
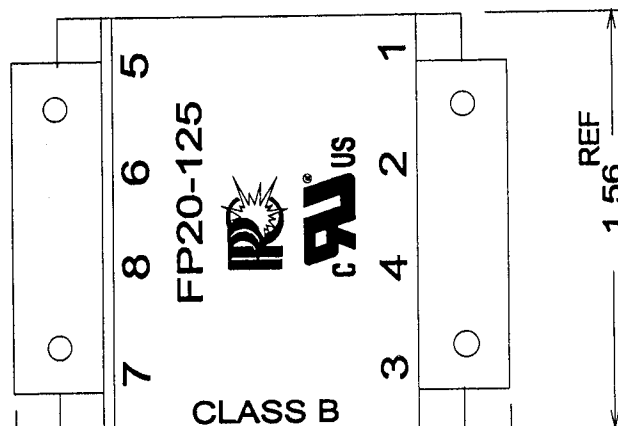


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

FP20-125.DC2

EIA-17-YWW
XXX B10

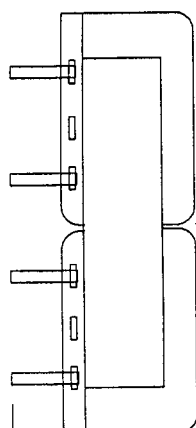

- .060 DIA HOLES

PRODUCTION TESTS

URNS RATIO = 100%

DC RESISTANCE IN OHMS

1-2 = 3-4 = 765 TO 930
5-6 = 7-8 = 10.4 TO 12.7

MAX EXCITATION CURRENT = .010 A
APPLY = 230V 60HZ, 1-4 (TIE 2+3)

OPEN CIRCUIT VOLTAGE
EACH PRI = 114.5 TO 115.5 V
EACH SEC = 12.75 TO 13.6 V

HIPOT = 2000V PRI'S TO SEC'S
1500V PRI'S, SEC'S TO CORE
500V P-P, S-S

IMPREGNATION NOTES = PREHEAT 2 HRS
PINS TO FREE OF IMPREGNATION

FINAL ASSEMBLY NOTES

METHOD 1 X 1

MARKING
ON

PRINTED WRAPPER
DATE & SITE CODE ON DECAL



PART NO.: FP20-125