
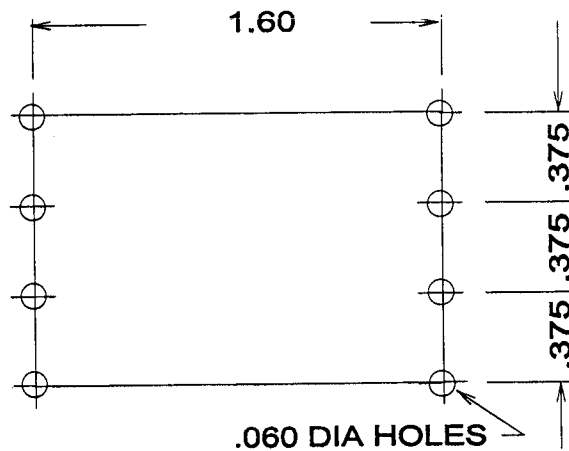
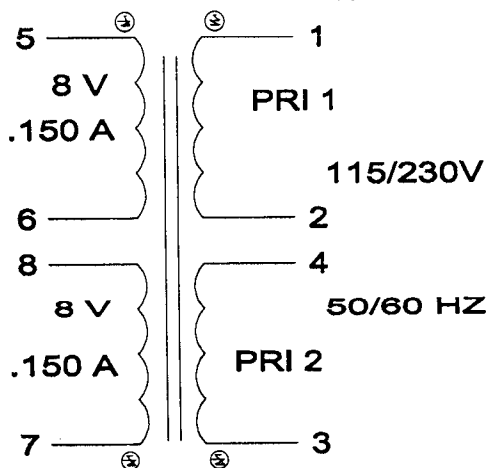
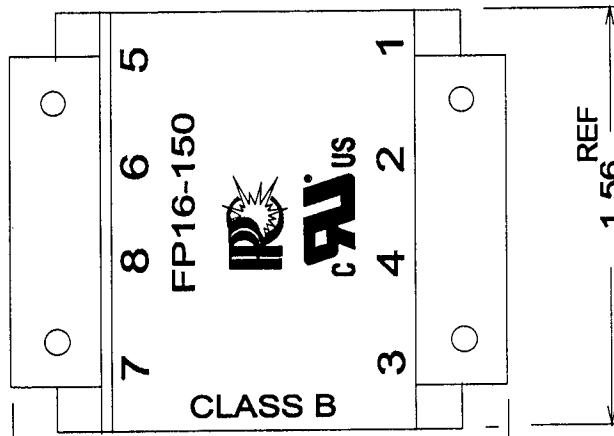


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

FP16-150.DC2

EIA-17-Y YWW
XXX B10

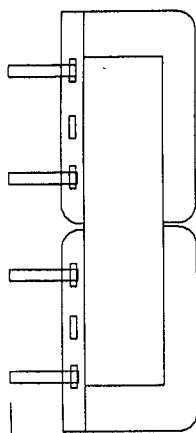

PRODUCTION TESTS

URNS RATIO = 100%

DC	1-2 = 3-4 = 765 TO 930
RESISTANCE	5-6 = 7-8 = 6.6 TO 8.1
IN OHMS	

MAX EXCITATION CURRENT = .010 A
APPLY = 230V 60HZ, 1-4 (TIE 2+3)

OPEN CIRCUIT VOLTAGE

EACH PRI = 114.5 TO 115.5 V

EACH SEC = 10.2 TO 10.7 V

HIPOT = 2000V PRI'S TO SEC'S

1500V PRI'S, SEC'S TO CORE

500V P-P, S-S

IMPREGNATION NOTES = PREHEAT 2 HRS
PINS TO FREE OF IMPREGNATION

FINAL ASSEMBLY NOTES

METHOD 1 X 1

MARKING
ON

PRINTED WRAPPER
DATE & SITE CODE ON DECAL



PART NO.: FP16-150