
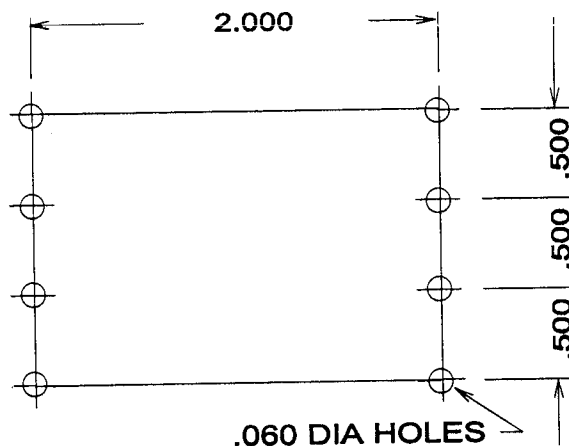
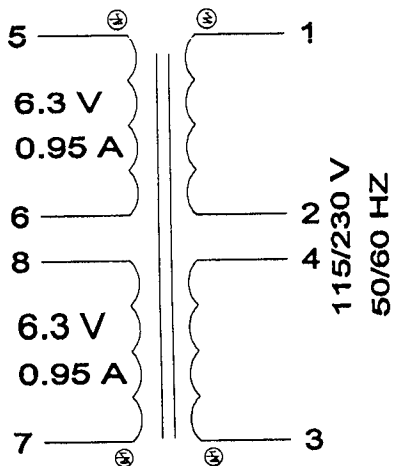
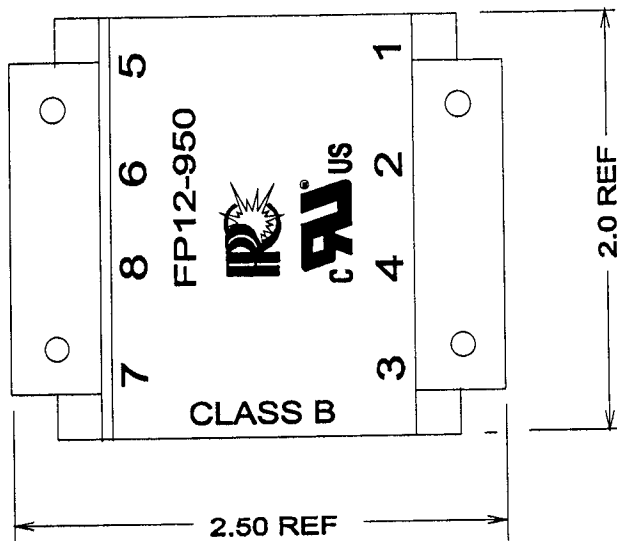


TOLERANCE UNLESS SPECIFIED = .XXX= +/- .005 .XX= +/- .015 FRACTIONS= +/- .032

FP12-950.DC2

EIA-17-YVWW
XXX B10

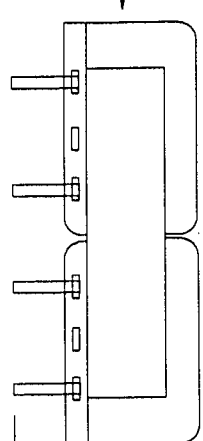

PRODUCTION TESTS

Turns Ratio = 100%

DC	1-2 = 114 TO 140
RESISTANCE	3-4 = 114 TO 140
IN OHMS	5-6 = 0.5 TO 0.62
NOM	7-8 = 0.5 TO 0.62

MAX EXCITATION CURRENT = 22 MA

APPLY = 230V, 60 HZ, 1-4, TIE 2+3

EACH PRI = 114.5 TO 115.5 V

EACH SEC = 7.2 TO 7.7 V

HIPOT = 2000V PRI'S TO SEC'S

1500V PRI'S, SEC'S TO CORE

500V P-P, S-S

IMPREGNATION NOTES = PREHEAT 2 HRS
PINS TO BE FREE OF EPOXY

FINAL ASSEMBLY NOTES

METHOD 1 X 1

MARKING PRINTED WRAPPER
DATE CODE ON LABEL AS SHOWN ABOVE.



PART NO.: FP12-950