

FLL21E010MK


High Voltage - High Power GaAs FET

FEATURES

- High Voltage Operation : VDS=28V
- High Power : P1dB=40dBm(typ.) at f=2.17GHz
- High Gain: G1dB=14dB(typ.) at f=2.17GHz
- Broad Frequency Range : 2100 to 2200MHz
- Proven Reliability

DESCRIPTION

The FLL21E010MK is a high power GaAs FET that offers high efficiency, ease of matching, greater consistency and broad bandwidth for high power L-band amplifiers. This device is targeted for high voltage, low current operation in digitally modulated amplification. This product is ideally suited for W-CDMA and Multi-carrier PCS base station amplifiers while offering high gain, long term reliability and ease of use.

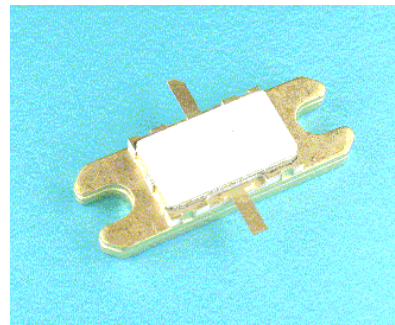

ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Condition	Rating	Unit
Drain-Source Voltage	VDS	Tc=25°C	32	V
Gate-Source Voltage	VGS		-3	V
Total Power Dissipation	Pt		41.5	W
Storage Temperature	Tstg		-65 to +175	°C
Channel Temperature	Tch		200	°C

RECOMMENDED OPERATING CONDITION (Case Temperature Tc=25°C)

Item	Symbol	Condition	Limit	Unit
DC Input Voltage	VDS	RG=50 Ω	<28	V
Forward Gate Current	IGF		<47	mA
Reverse Gate Current	IGR		>-2.5	mA
Channel Temperature	Tch		155	°C

ELECTRICAL CHARACTERISTICS (Case Temperature Tc=25°C)


Item	Symbol	Condition	Limit			Unit
			min.	Typ.	Max.	
Pinch-Off Voltage	Vp	VDS=5V IDS=1.5mA	-0.1	-0.2	-0.5	V
Gate-Source Breakdown Voltage	VGS0	IGS=-15μA	-5	-	-	V
Output Power at 1dB G.C.P.	P1dB	VDS=28V f=2.17GHz	39.0	40.0	-	dBm
Power Gain at 1dB G.C.P.	G1dB	IDS(DC)=125mA	13.0	14.0	-	dB
Drain Efficiency	ηd		-	40	-	%
Thermal Resistance	Rth	Channel to Case	-	3.1	3.6	°C /W

G.C.P.: Gain Compression Point


FLL21E010MK

High Voltage - High Power GaAs FET


Output Power & Drain Efficiency vs. Input Power
@VDS=28V IDS=125mA f=2.17GHz

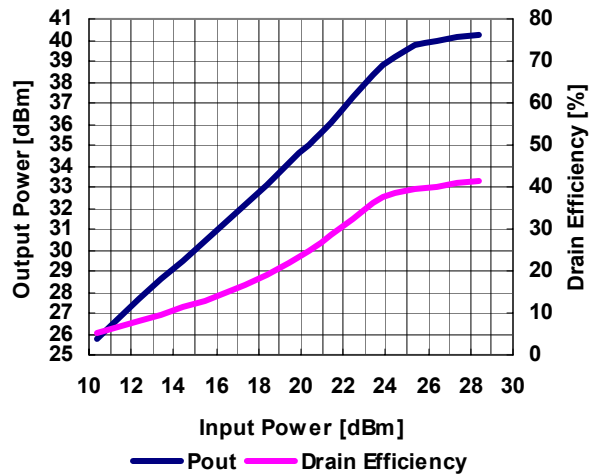

Two-Carrier IMD(ACLR) & Drain Efficiency vs. Output Power
@VDS=28V IDS=125mA fo=2.1325GHz f1=2.1475GHz
W-CDMA 3-GPP BS-1 64ch Modulation

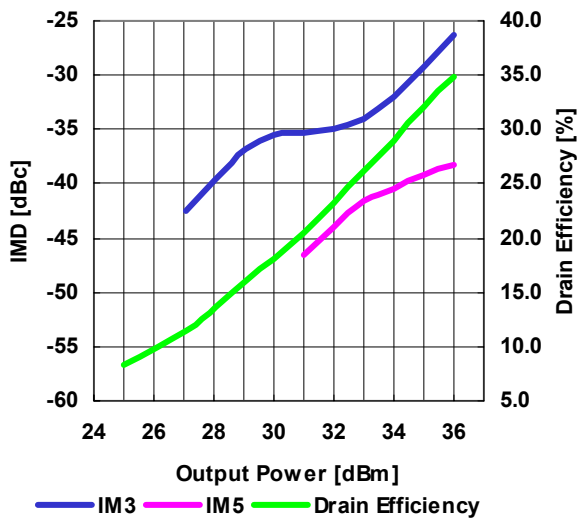


Single-Carrier ACLR & Drain Efficiency vs. Output Power
@VDS=28V IDS=125mA f=2.1325GHz
W-CDMA 3GPP BS-1 64ch Modulation

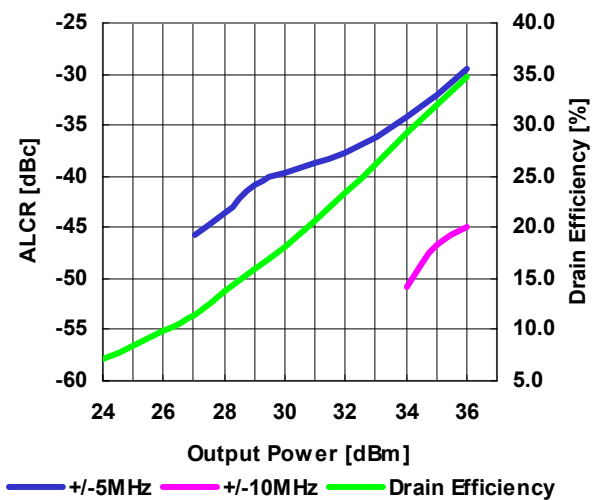

FLL21E010MK

High Voltage - High Power GaAs FET


S-Parameters @VDS=28V IDS=300mA f=0.5 to 5.0 GHz

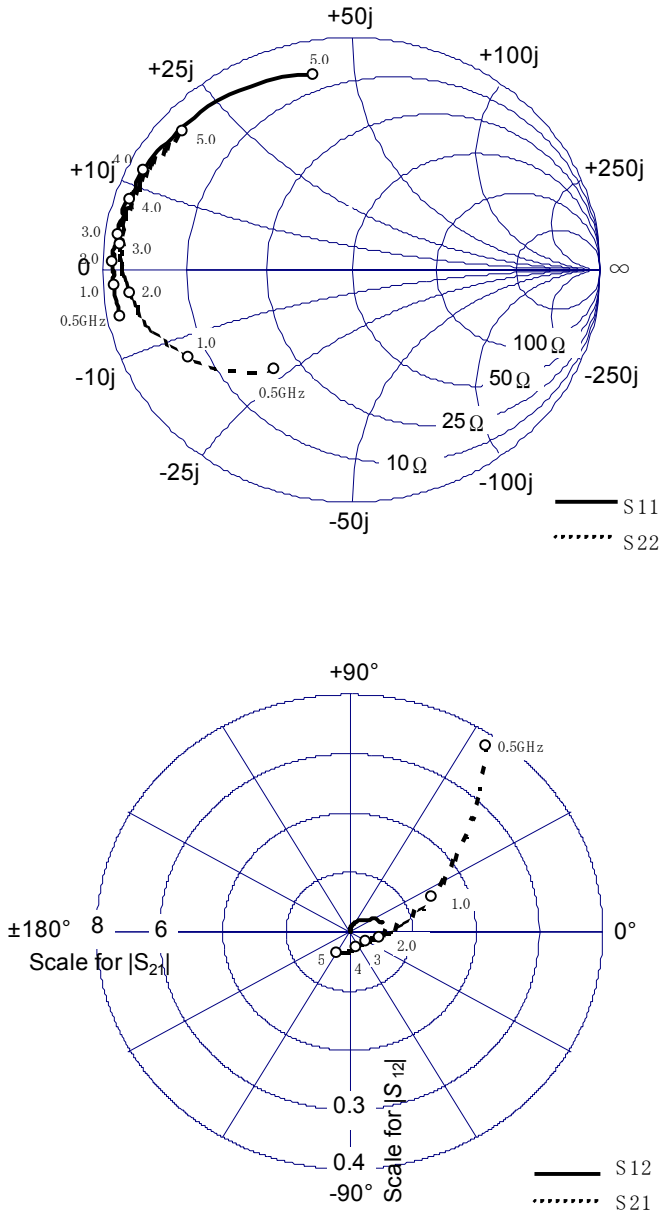


f(freq)(GHz)	S11(mag)	S11(ang)	S21(mag)	S21(ang)	S12(mag)	S12(ang)	S22(mag)	S22(ang)
0.1	0.958	-120.1	38.897	110.3	0.005	17.9	0.226	-81.4
0.2	0.948	-148.0	20.943	88.1	0.005	-1.4	0.291	-101.0
0.3	0.945	-158.9	13.801	74.6	0.005	-11.9	0.375	-111.0
0.4	0.946	-164.3	9.953	64.0	0.004	-12.0	0.459	-119.0
0.5	0.945	-167.8	7.598	55.3	0.004	-7.9	0.531	-125.8
1	0.956	-175.7	2.880	24.4	0.002	29.6	0.756	-150.1
1.1	0.953	-176.5	2.487	19.5	0.002	32.1	0.778	-153.5
1.2	0.955	-177.5	2.153	15.5	0.002	52.9	0.806	-156.5
1.3	0.956	-177.9	1.906	11.7	0.003	50.6	0.826	-159.6
1.4	0.954	-178.8	1.688	7.8	0.003	60.6	0.839	-162.2
1.5	0.956	-179.6	1.526	4.5	0.005	65.7	0.854	-164.2
1.6	0.952	-179.7	1.391	1.3	0.004	61.6	0.869	-166.4
1.7	0.955	-179.8	1.255	-1.7	0.004	74.9	0.873	-168.7
1.8	0.955	-178.8	1.154	-4.5	0.006	80.3	0.879	-170.1
1.9	0.959	-178.3	1.070	-7.3	0.006	73.5	0.889	-172.1
1.95	0.953	-178.1	1.023	-9.2	0.007	80.8	0.888	-173.0
2	0.956	-177.8	0.984	-9.9	0.007	77.8	0.890	-173.7
2.05	0.960	-177.6	0.961	-11.6	0.007	77.2	0.897	-174.2
2.1	0.952	-177.4	0.920	-13.1	0.008	71.8	0.902	-175.1
2.11	0.959	-177.2	0.920	-13.4	0.007	79.5	0.899	-175.5
2.12	0.960	-177.5	0.910	-13.5	0.007	76.2	0.901	-175.5
2.13	0.957	-176.9	0.908	-13.9	0.008	74.8	0.906	-175.7
2.14	0.958	-177.1	0.902	-13.4	0.011	61.1	0.900	-175.8
2.15	0.955	-176.9	0.891	-14.4	0.008	74.9	0.905	-176.0
2.16	0.952	-176.7	0.889	-15.2	0.007	74.5	0.904	-176.3
2.17	0.957	-176.8	0.878	-14.8	0.007	79.2	0.910	-176.5
2.18	0.959	-176.8	0.873	-15.0	0.008	69.0	0.905	-176.6
2.19	0.961	-176.7	0.869	-15.2	0.007	72.9	0.906	-176.5
2.2	0.954	-176.5	0.855	-15.9	0.007	77.2	0.904	-177.0
2.25	0.956	-176.7	0.832	-16.7	0.007	78.7	0.909	-177.4
2.3	0.953	-175.9	0.810	-17.5	0.008	74.9	0.909	-178.0
2.35	0.956	-175.4	0.784	-19.7	0.009	80.0	0.920	-178.4
2.4	0.958	-175.4	0.771	-20.7	0.009	75.0	0.919	-179.3
2.5	0.950	-174.6	0.731	-22.7	0.010	75.0	0.920	-179.5
2.6	0.951	-174.0	0.701	-25.0	0.011	78.1	0.922	-178.6
2.7	0.947	-173.6	0.673	-27.7	0.012	74.2	0.931	-177.0
2.8	0.953	-172.5	0.652	-30.1	0.011	75.5	0.924	-175.7
2.9	0.944	-171.6	0.635	-33.1	0.013	74.0	0.927	-174.9
3	0.949	-170.8	0.609	-35.5	0.014	70.5	0.930	-173.5

High Voltage - High Power GaAs FET

<INPUT SIDE>

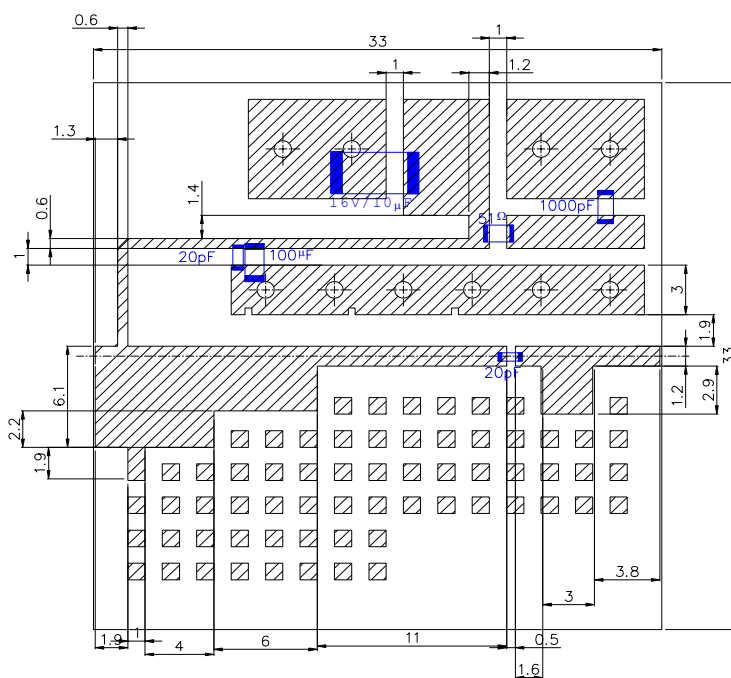 $\epsilon_r=10.45 \quad t=1.2\text{mm}$

_____ *H*



Unit : mm

FLL21E010MK

High Voltage - High Power GaAs FET

For further information please contact :

Eudyna Devices USA Inc.

2355 Zanker Rd.
San Jose, CA 95131-1138, U.S.A.
TEL: (408) 232-9500
FAX: (408) 428-9111
www.us.eudyna.com

Eudyna Devices Europe Ltd.

Network House
Norreys Drive
Maidenhead, Berkshire SL6 4FJ
United Kingdom
TEL: +44 (0) 1628 504800
FAX: +44 (0) 1628 504888

Eudyna Devices Asia Pte. Ltd.

Hong Kong Branch
Rm.1101,Ocean Centre, 5 Canton Road
Tsim Sha Tsui, Kowloon, Hong kong
TEL: +852-2377-0227
FAX: +852-2377-3921

Eudyna Devices Inc.

1000 Kamisukiahara, showa-cho
Nakakomagun, Yamanashi
409-3883, Japan
(Kokubo Industrial Park)
TEL +81-55-275-4411
FAX +81-55-275-9461

Sales Division

1, Kanai-cho, Sakae-ku
Yokohama,244-0845,Japan
TEL +81-45-853-8156
FAX +81-45-853-8170

CAUTION

Eudyna Devices Inc. products contain **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not put these products into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

Eudyna Devices Inc. reserves the right to change products and specifications without notice. The information does not convey any license under rights of Eudyna Devices Inc. or others.

© 2004 Eudyna Devices USA Inc.
Printed in U.S.A.