

Tyco/Electronics

Raychem Circuit Protection

308 Constitution Drive
Menlo Park, CA 94025
800-227-4856
FAX 800-227-4866

PolySwitch®

PTC Devices

Overcurrent Protection Device

PRODUCT: RHE600

DOCUMENT: SCD 24258

PCN: 626189

REV LETTER: F

REV DATE: OCTOBER 8, 2001

PAGE NO.: 1 OF 1

Specification Status: RELEASED

Electrical Rating

Voltage: 16V MAX

Current: 100A MAX

INSULATING MATERIAL:

Cured, Flame Retarded Epoxy Polymer

LEAD MATERIAL:

20 AWG Tin/Lead Plated Copper
(0.8 mm [0.032] nom. diameter)

PART MARKING:

Raychem Logo and Voltage
X 16
H6 — Part Identification
Lot Identification (can be on back)

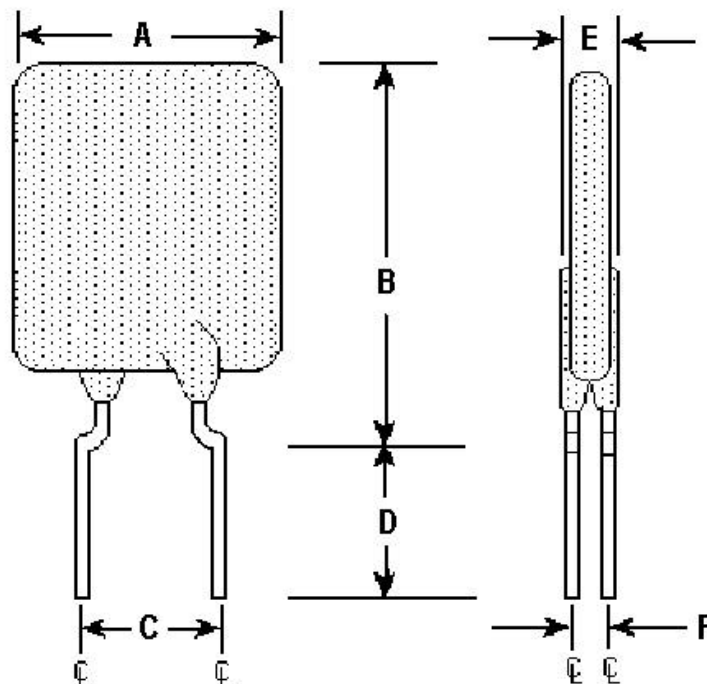


TABLE I. DIMENSIONS:

	A		B		C		D		E		F
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	TYP
mm:	--	11.2	--	21.0	4.3	5.8	7.6	--	--	3.0	1.2
in*:	--	(0.44)	--	(0.83)	(0.17)	(0.23)	(0.30)	--	--	(0.12)	(0.05)

*Rounded off approximation

TABLE II. PERFORMANCE RATINGS:

I HOLD	CURRENT RATINGS						TIME TO TRIP	RESISTANCE		TRIPPED-STATE POWER DISSIPATION
AMPS 25°C	AMPS AT 0°C		AMPS AT 25°C		AMPS AT 60°C		SECONDS AT 25°C, 30 A	OHMS AT 25°C		WATTS AT 25°C
HOLD	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	MAX	MIN	MAX	TYP
6.00	--	--	6.0	10.8	--	--	5.0	0.013	0.032	4.1

Recognitions:

Reference Documents:

Precedence:

Effectivity:

CAUTION:

UL, TUV, CSA recognized.

PS300

This specification takes precedence over documents referenced herein.

Reference documents shall be the issue in effect on the date of invitation for bid.

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.