

RL101FG THRU RL107FG


CURRENT 1.0 Ampere
VOLTAGE 50 to 1000 Volts

Features

- High reliability
- Low leakage current
- Low forward voltage drop
- High current capability
- Glass passivated junction
- High switching capability

Mechanical Data

- Case : A-405 molded plastic body
- Terminals : Plated axial lead solderable per MIL-STD-750, method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight : 0.008 ounce, 0.22 gram

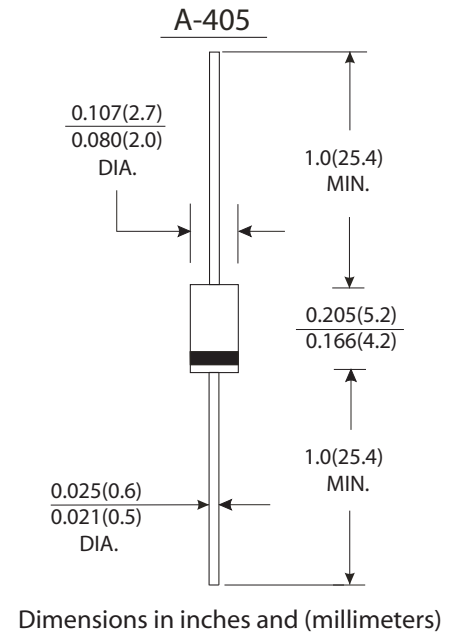

Maximum Ratings And Electrical Characteristics

(Ratings at 25 °C ambient temperature unless otherwise specified, Single phase, half wave 60Hz, resistive or inductive load. For capacitive load, derate by 20%)

	Symbols	RL 101FG	RL 102FG	RL 103FG	RL 104FG	RL 105FG	RL 106FG	RL 107FG	Units
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current 0.375"(9.5mm) lead length T _A =55 °C	I _(AV)	1.0							Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	30.0							Amps
Maximum instantaneous forward voltage at 1.0A	V _F	1.3							Volts
Maximum DC reverse current at rated DC blocking voltage at T _A =25 °C	I _R	5.0							μA
Maximum full load reverse current full cycle average, 0.375"(9.5mm) lead length at T _A =125 °C		100							
Maximum reverse recovery time (Note 1)	T _{rr}	150				250	500		ns
Typical junction capacitance (Note 2)	C _J	15.0							pF
Operating junction and storage temperature range	T _J T _{STG}	-65 to +150							°C

Notes:

- (1) Test conditions: I_F=0.5A, I_R=1.0A, I_{rr}=0.25A.
- (2) Measured at 1MHz and applied reverse voltage of 4.0 Volts.

RATINGS AND CHARACTERISTIC CURVES RF101FG THRU RF107FG

FIG.1-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC


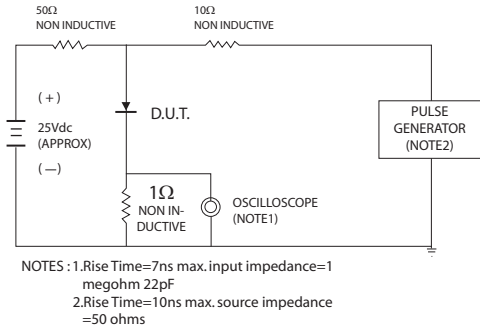


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

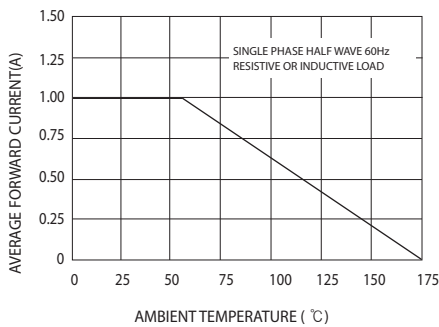


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

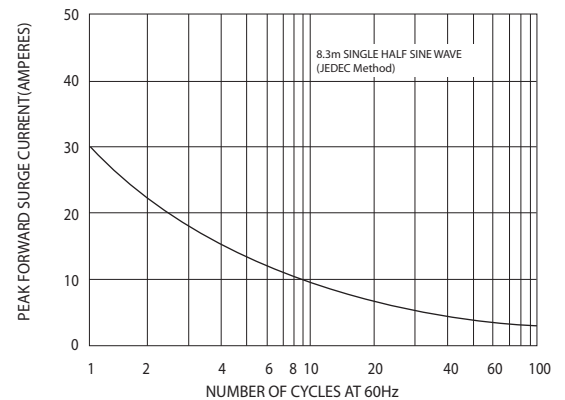


FIG.4-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

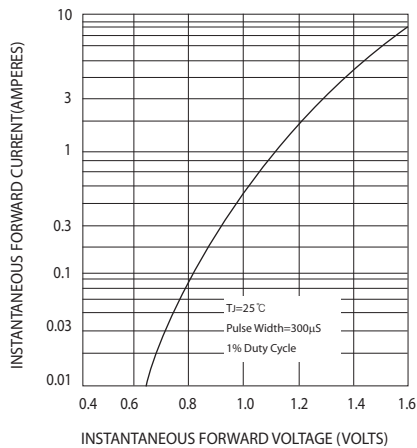


FIG.5-TYPICAL JUNCTION CAPACITANCE

