

HCMOS 3.2x2.5mm 2.5V SMD Oscillator



Model: F340 Series

RoHS Compliant / Pb Free

Rev. 4/17/2007

Page 1 of 2

http://www.foxonline.com/need_a_sample.htm



FEATURES

- 2.5V Operation
- HCMOS Output
- Low Power Consumption
- Standby Function
- Tape and Reel (2,000 pcs. STD)

PRELIMINARY

• PART NUMBER SELECTION

Part Number	Model Number	Frequency Stability ¹	Operating Temperature (°C)	Frequency Range (MHz)
639-Frequency-xxxxx	F340	±100PPM	-10 ~ +70	1.800 ~ 50.000
643-Frequency-xxxxx	F340R	±100PPM	-40 ~ +85	1.800 ~ 50.000
640-Frequency-xxxxx	F345	±50PPM	-10 ~ +70	1.800 ~ 50.000
644-Frequency-xxxxx	F345R	±50PPM	-40 ~ +85	1.800 ~ 50.000
641-Frequency-xxxxx	F346	±25PPM	-10 ~ +70	1.800 ~ 50.000
645-Frequency-xxxxx	F346R	±25PPM*	-40 ~ +85	1.800 ~ 50.000
642-Frequency-xxxxx	F348	±20PPM*	-10 ~ +70	1.800 ~ 50.000

• ELECTRICAL CHARACTERISTICS


PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	1.800 ~ 50.000 MHz
Storage Temperature Range (T _{STG})	-55°C ~ +125°C
Supply Voltage (V _{DD})	2.5V ± 5%
Input Current (I _{DD})	20mA
Output Symmetry (50% V _{DD})	45% ~ 55%
Rise Time (10% ~ 90% V _{DD}) (T _R)	6nS
Fall Time (90% ~ 10% V _{DD}) (T _F)	6nS
Output Voltage (V _{OL})	10% V _{DD}
(V _{OH})	90% V _{DD} Min
Output Current (I _{OL})	2mA Min
(I _{OH})	-2mA Min
Output Load (HCMOS)	15pF
Standby Current	10µA
Start-up Time (T _s)	5mS
Output Disable Time ²	150nS
Output Enable Time ²	5mS

¹ Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, aging, shock, and vibration. *Excludes Shock/Vibration

² An internal pullup resistor from pin 1 to pin 4 allows active output if pin 1 is left open.

Note: A 0.01µF bypass capacitor should be placed between V_{DD} (Pin 4) and GND (Pin 2) to minimize power supply line noise.

All specifications subject to change without notice.

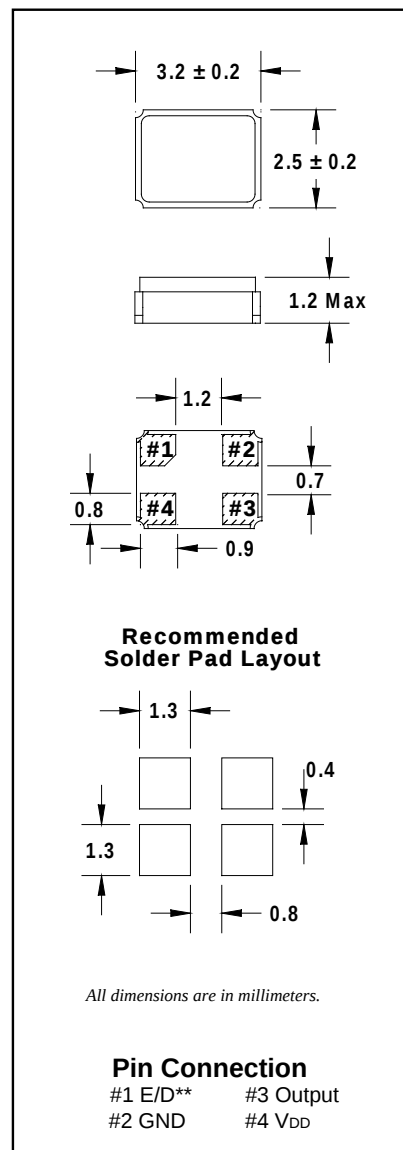

All dimensions are in millimeters.

• ENABLE / DISABLE FUNCTION

INH (Pin 1)	OUTPUT (Pin 3)
OPEN ²	ACTIVE
'1' Level V _{IH} ≥ 70% V _{DD}	ACTIVE
'0' Level V _{IL} ≤ 30% V _{DD}	High Z

HCMOS 3.2x2.5mm 2.5V SMD Oscillator



Model: F340 Series

RoHS Compliant / Pb Free

Rev. 4/17/2007

Page 1 of 2

http://www.foxonline.com/need_a_sample.htm



• TAPE SPECIFICATIONS (millimeters)							
MODEL	A	B	C	D	E	F	STD Reel QTY
F340 Series	Ø1.5	4.0	4.0	3.5	8.0	1.3	2,000

• REEL SPECIFICATIONS (millimeters)							
MODEL	G	H	I	J	K	L	M
F340 Series	2.0	Ø13	Ø21	Ø60	Ø180	9.0	1.2

