

P/N	ESLB-S540A	DATE.	'04- 2- 4	
DWN.	M.Uchida	DATA-No.	2MT43485	1

2012 Size

Chip Band Pass Filter

for W-LAN

ESLB-S540A


Ver.A

CONFIDENTIAL

The contents of this document is the property of Hitachi Metals Ltd. and may not be communicated to any other party in any form without the prior written contents of Hitachi Metals Ltd..

P/N	ESLB-S540A	DATE.	'04- 2- 4
DWN.	M.Uchida	DATA-No.	2MT43485
			1

Shape & Size


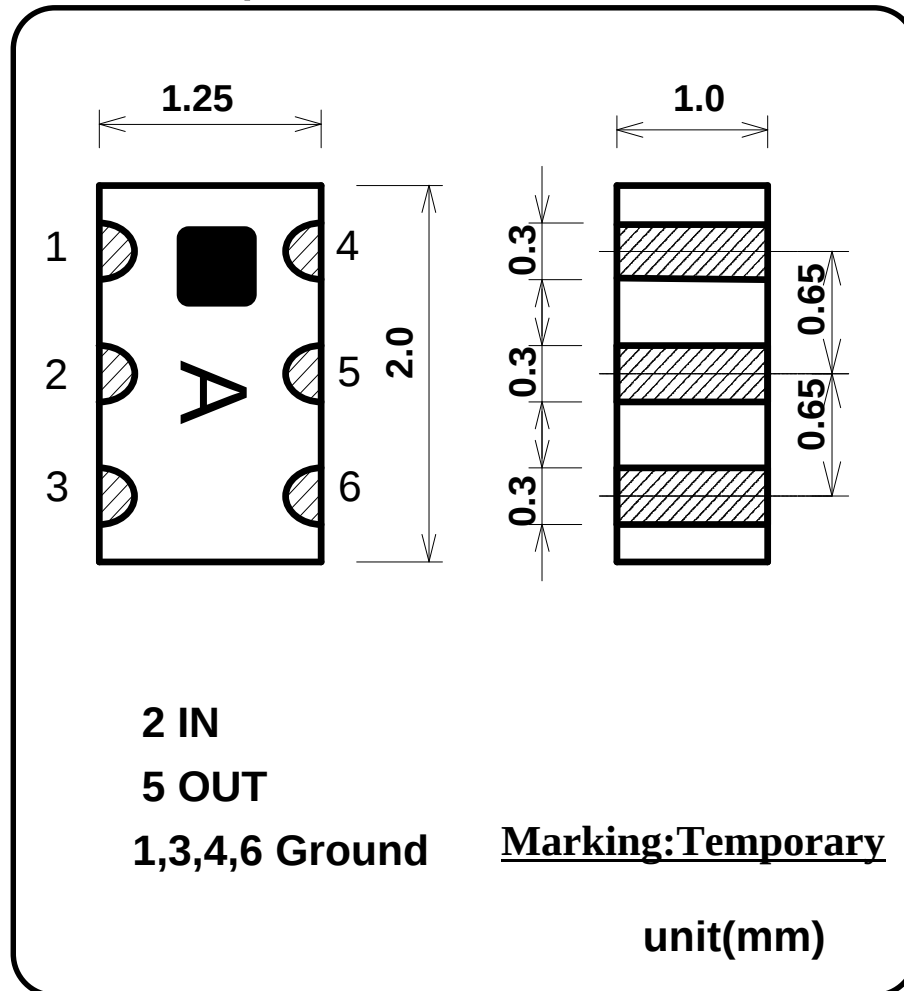


Specifications(Temporary)

Parameter	Unit	
Center Frequency(f_0)	MHz	5400
Passband Width	MHz	$f_0 \pm 500$
Insertion Loss (at 25 deg.C)	dB	1.4 max
Insertion Loss (at -35 to +85 deg.C)	dB	1.5 max
Ripple in passband	dB	0.3 min
Input Ret.Loss	dB	10 min
Attenuation1 (at DC-2.5GHz)	dB	25 min
Attenuation2 (at 9.8-11.8GHz)	dB	23 min
Attenuation3 (at 14.7-17.7GHz)	dB	10 min
Characteristic Impedance	Ohm	50
Handling Power	W	0.5 max
Operating Temperature	deg.C	-35 to +85


P/N	ESLB-S540A	DATE.	'04- 2- 4	
DWN.	M.Uchida	DATA-No.	2MT43485	1

ESLB-S540A Ver.A Sample DATA

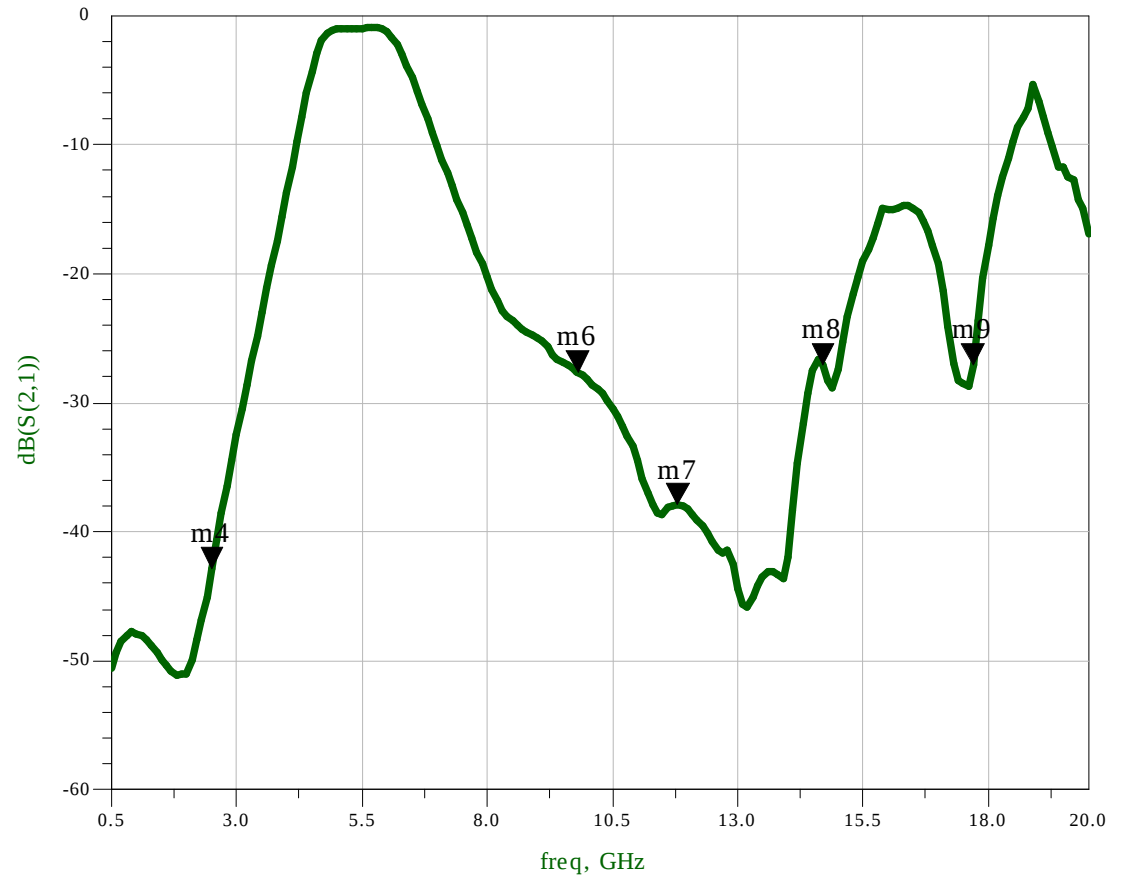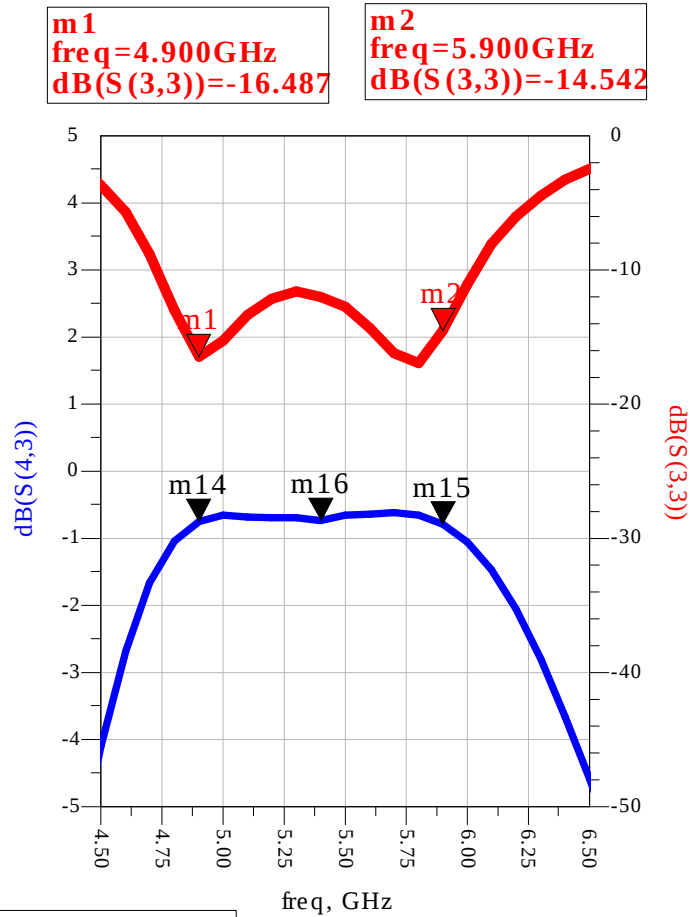

P/N	ESLB-S540A	DATE.	'04- 2- 4	
DWN.	M.Uchida	DATA-No.	2MT43485	1

Foot Pattern

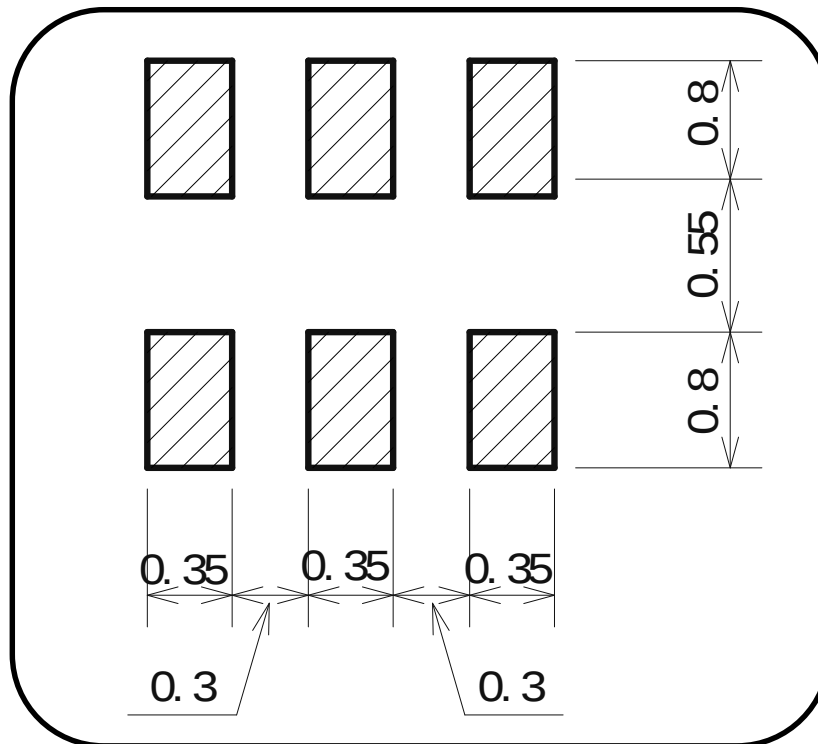

Foot Pattern Example

