
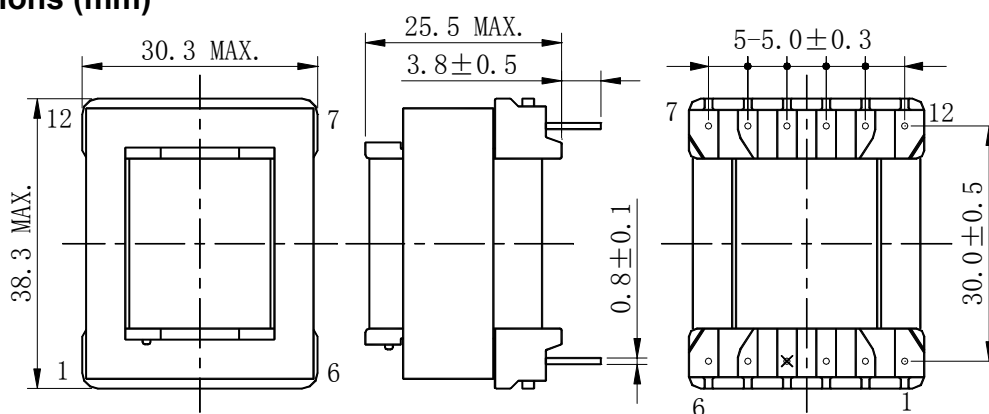



**Type: ERH2826/MS**
**◆ Product Description**

- 38.3×30.3mm Max.(L×W), 25.5mm Max. Height.
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements.


**◆ Feature**

- Max. Operating frequency 500kHz. Max Operating Power 35.0W(500kHz)
- Ideally used in Switching regulator, EL inverter.
- RoHS Compliance

**◆ Dimensions (mm)**

**◆ Schematics (Bottom)**


"S" indicates winding start.

**◆ Specification**

Sample No.	Inductance (1-3) 100kHz/1V	Leakage Inductance (1-3) 100kHz/1V	Hi-pot Winding-winding (50/60Hz)
03YPD101	460μH ± 30%	2.4 μ H Max.	AC 3000Vrms/1min.