


ENERGIZER NO. EN93



Industry Standard Dimensions in mm (inches)

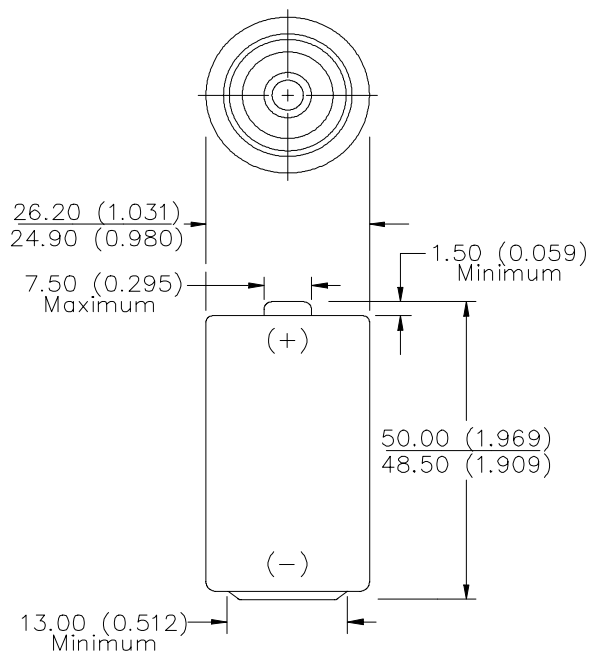


Negative cover detail referenced on page 2


C
NOT INTENDED FOR RETAIL TRADE

Chemical System:	Alkaline Zinc-Manganese Dioxide (Zn/MnO ₂) (No Added Mercury or Cadmium)
Designation:	ANSI-14A, IEC-LR14
Battery Voltage:	1.5 Volts
Internal Resistance:	324 Milliohms (Fresh)
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Average Capacity:	8,350 mAh (to 0.8 volts) (Rated capacity at 25 mA continuous drain)
Average Weight:	66.2 grams (2.3 oz.)
Volume:	26.9 cubic centimeters (1.6 cubic inch)
Cell:	One No. 3-335 (size 'C')
Jacket:	Plastic Label
Shelf Life:	7 years (80% of rated capacity)


TEMPERATURE EFFECTS **Typical Service to 0.8 Volts**

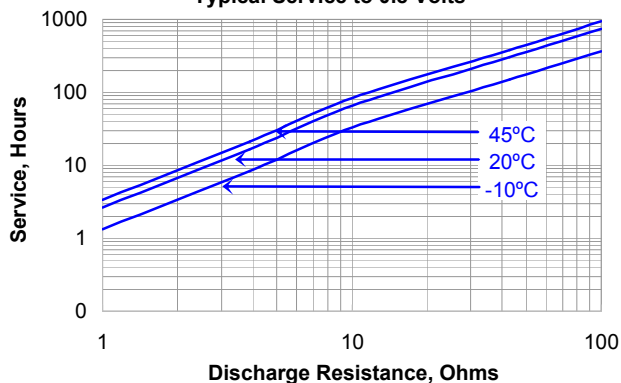

CONSTANT RESISTANCE PERFORMANCE **Typical Service**

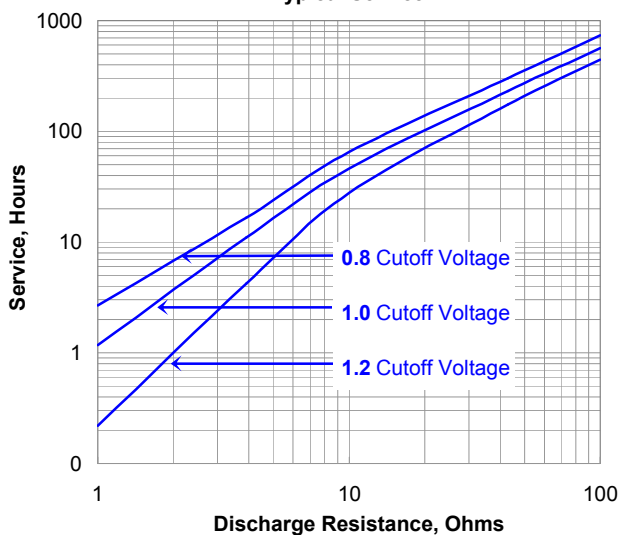

CONSTANT CURRENT DISCHARGE **Typical Service**


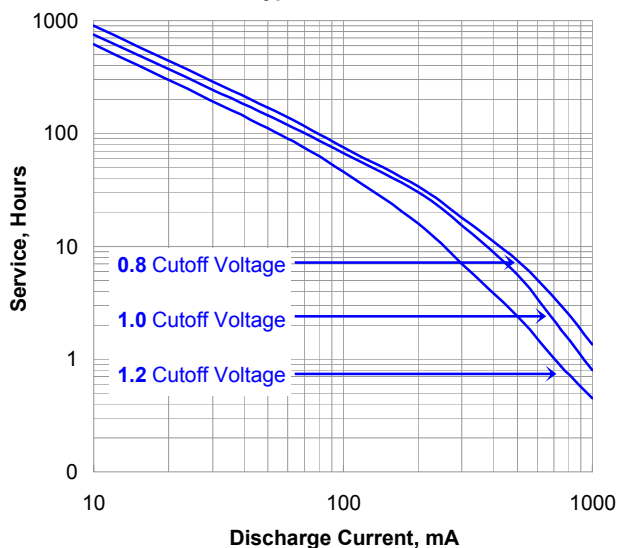


Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved

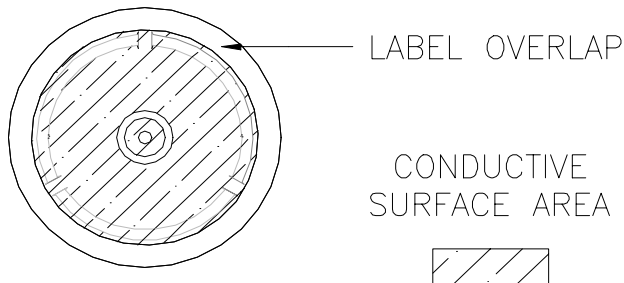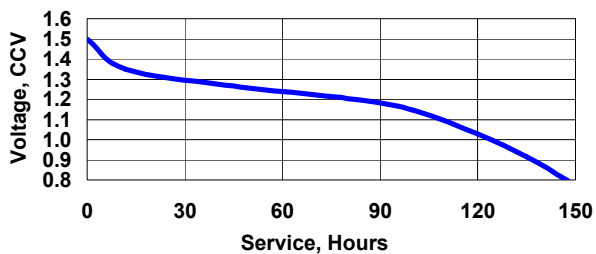ENERGIZER NO. EN93**NEGATIVE COVER VIEW****Industry Standard Tests @ 20° C****TOY**
3.9 ohm - 1 hr/day**PORTABLE LIGHTING**
3.9 ohm - LIF**PORTABLE STEREO**
400 mA - 2 hr/day**RADIO**
20 ohm - 4 hr/day**Important Notice**

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved