


ENERGIZER NO. EN91

AA


Industry Standard Dimensions in mm (inches)

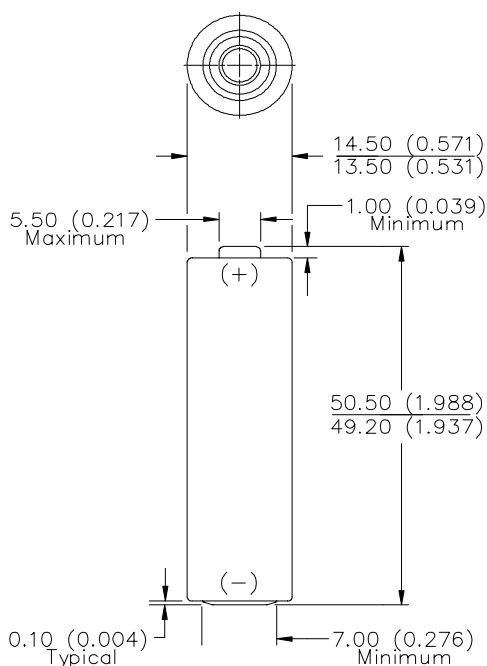


NOT INTENDED FOR RETAIL TRADE

Chemical System:	Alkaline Zinc-Manganese Dioxide (Zn/MnO ₂) (No Added Mercury or Cadmium)
Designation:	ANSI-15A, IEC-LR6
Battery Voltage:	1.5 Volts
Internal Resistance:	146 Milliohms (Fresh)
Operating Temp:	-18°C to 55°C (0°F to 130°F)
Average Capacity:	2,779 mAh (to 0.8 volts) (Rated capacity at 25 mA continuous drain)
Average Weight:	23.0 grams (0.8 oz.)
Volume:	8.1 cubic centimeters (0.5 cubic inch)
Cell:	One No. 3-315 (size 'AA')
Jacket:	Plastic Label
Shelf Life:	7 years (80% of rated capacity)


TEMPERATURE EFFECTS

Typical Service to 0.8 Volts

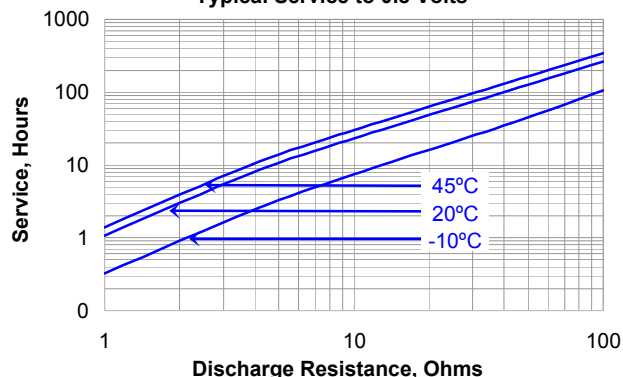


CONSTANT RESISTANCE PERFORMANCE

Typical Service

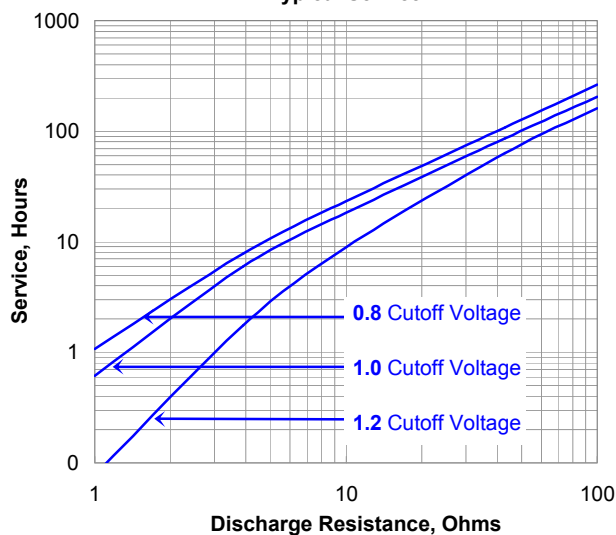

CONSTANT CURRENT DISCHARGE

Typical Service

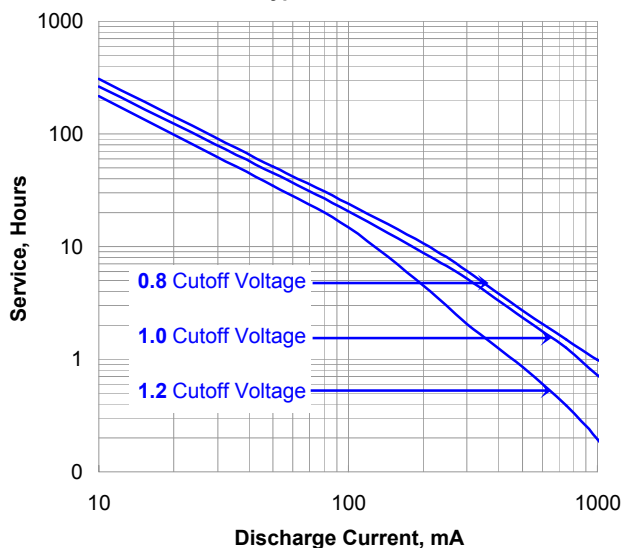

Important Notice


This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.


Copyright © Eveready Battery Co. - All rights reserved

ENERGIZER NO. EN91

CONSTANT POWER DISCHARGE
Typical Service

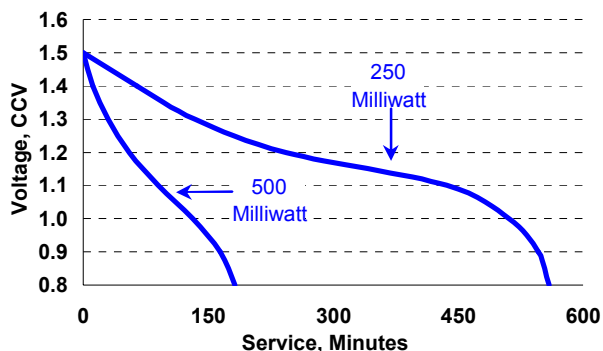


CONSTANT POWER DISCHARGE
Typical Service

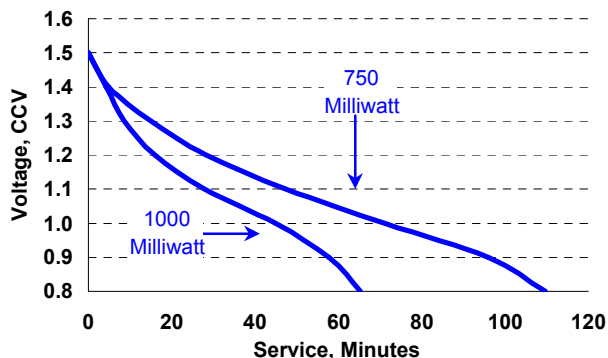


Industry Standard Tests @ 20° C


RADIO
43 ohm - 4 hours/day

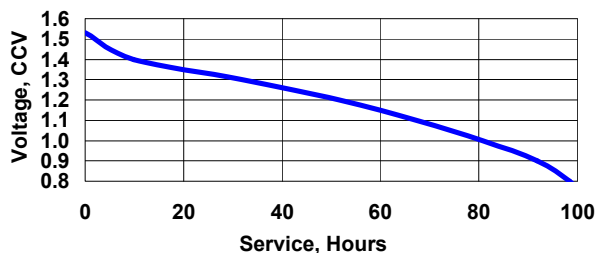


LIGHTING
3.3 ohm - LIF

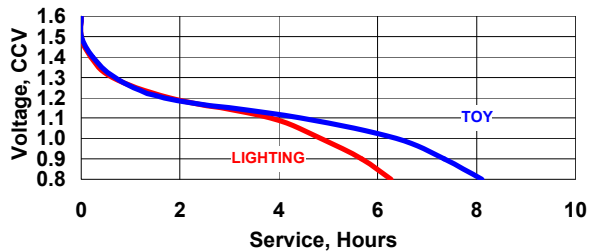


TOY
3.9 ohm - 1 hr/day

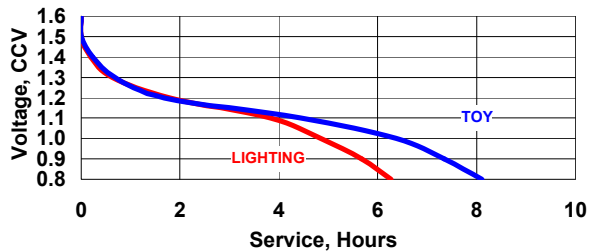


REMOTE
24 ohm - 15 spm - 8 hr/day

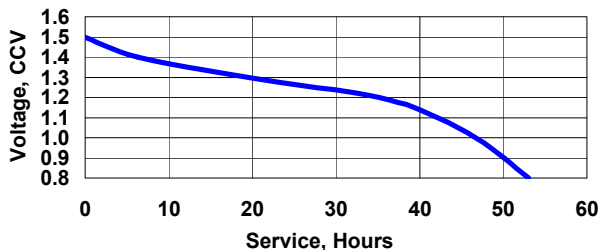

TAPE PLAYER
100 mA - 1 hr/day

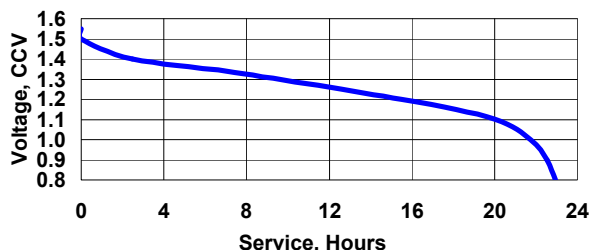

CD / MD / ELEC GAME
250 mA - 1 hr/day

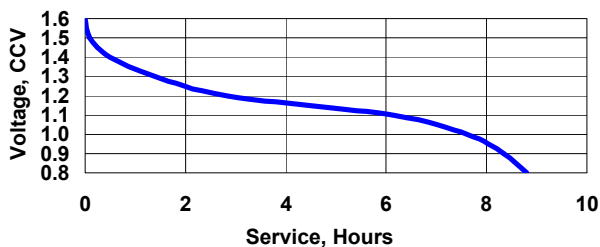

DIGITAL CAMERA
1.5/6.5K mW 2/28s
10X/hr


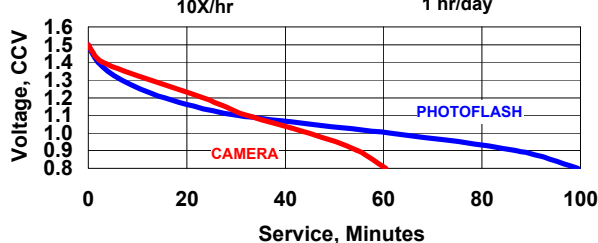


PHOTO
1000 mA 10 sec/min
1 hr/day

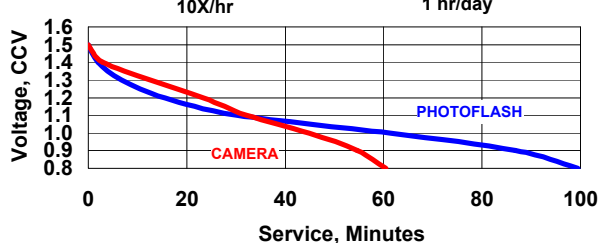

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved