

## Type: EI4036/MS


### Product Description

- 41.5 × 31.0mm Max.(L × W), 37.0mm Max. Height.
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements


### Feature

- Max. Operating frequency 500kHz. Max Operating Power 50.0W(500kHz)
- Ideally used in Switching power supply, EL inverter etc.
- RoHS Compliance

### Dimensions (mm)

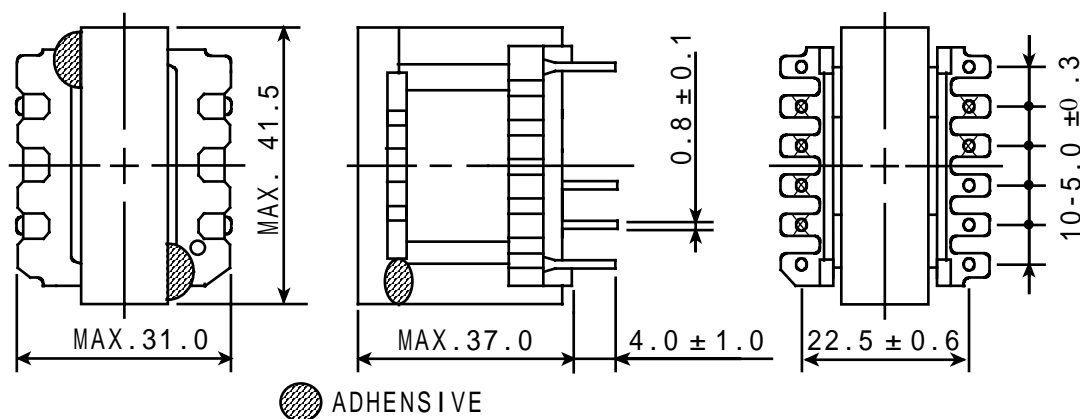

### Schematics (Bottom)



“S” is winding start

### Specification

| Sample No. | Inductance (1-6)<br>1kHz/1V | D.C.R.<br>(1-6) | Hi-pot<br>Winding-winding<br>(50/60Hz) |
|------------|-----------------------------|-----------------|--|
| 3393-T007  | 700μH ± 5%                  | 210mΩ Max.      | AC 1500Vrms/1min.                      |