

Descriptions

- High voltage application
- Telephone application

Features


- Collector-Emitter voltage
 $V_{CEO} = \text{SBT42F} : 300\text{V}$
- Complementary pair with SBT92F

Ordering Information

Type NO.	Marking	Package Code
SBT42F	M1A	SOT-23F

Outline Dimensions

unit : mm

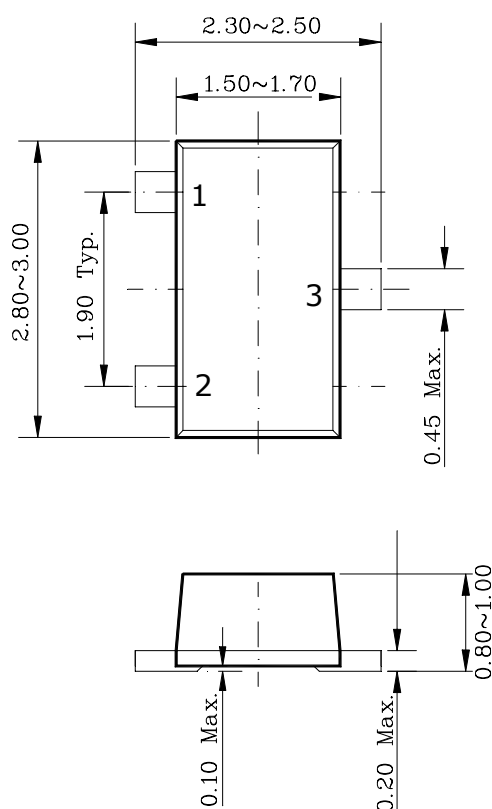

PIN Connections

1. Base
2. Emitter
3. Collector

Absolute maximum ratings

(Ta=25°C)

Characteristic	Symbol	Ratings	Unit
Collector-Base voltage	V_{CBO}	300	V
Collector-Emitter voltage	V_{CEO}	300	V
Emitter-Base voltage	V_{EBO}	6	V
Collector current	I_C	500	mA
Emitter Current	I_E	-500	mA
Collector dissipation	P_C^*	350	mW
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-55~150	°C

* : Package Mounted on 99.5% Alumina 10×8×0.6mm

Electrical Characteristics

(Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base breakdown voltage	BV_{CBO}	$I_C=100\mu A, I_E=0$	300	-	-	V
Collector-Emitter breakdown voltage	BV_{CEO}	$I_C=1mA, I_B=0$	300	-	-	V
Emitter-Base breakdown voltage	BV_{EBO}	$I_E=100\mu A, I_C=0$	6	-	-	V
Collector cut-off current	I_{CBO}	$V_{CB}=300V, I_E=0$	-	-	0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=6V, I_C=0$	-	-	0.1	μA
DC current gain	h_{FE}^*	$V_{CE}=10V, I_C=30mA$	40	-	-	-
Collector-Emitter saturation voltage	$V_{CE(sat)}^*$	$I_C=20mA, I_B=2mA$	-	-	0.5	V
Base-Emitter saturation voltage	$V_{BE(sat)}^*$	$I_C=20mA, I_B=2mA$	-	-	0.9	V
Transition frequency	f_T	$V_{CE}=20V, I_C=10mA$	50	-	-	MHz
Collector output capacitance	C_{ob}	$V_{CB}=20V, I_E=0, f=1MHz$	-	-	3	pF

* : Pulse Tester : Pulse Width $\leq 300 \mu s$, Duty Cycle $\leq 2.0\%$

Electrical Characteristic Curves

Fig. 1 $h_{FE} - I_C$

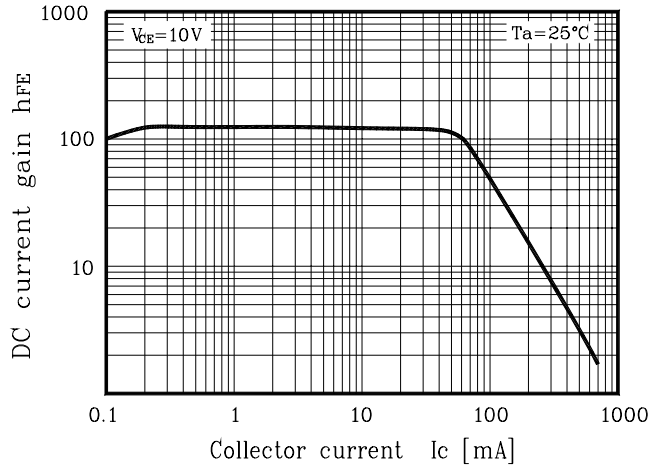


Fig. 2 $V_{CE(sat)}, V_{BE(sat)} - I_C$

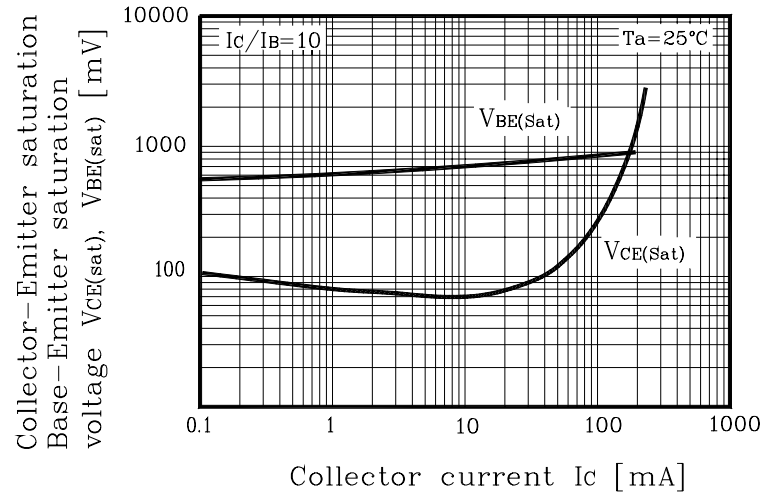


Fig. 3 $f_T - I_C$


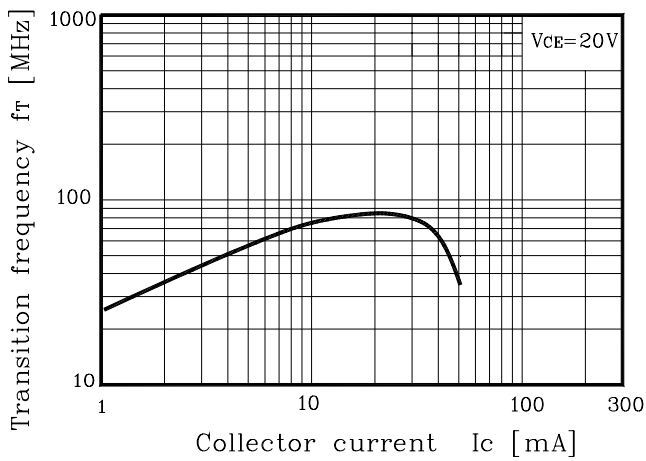


Fig. 4 $C_{ob} - V_R$

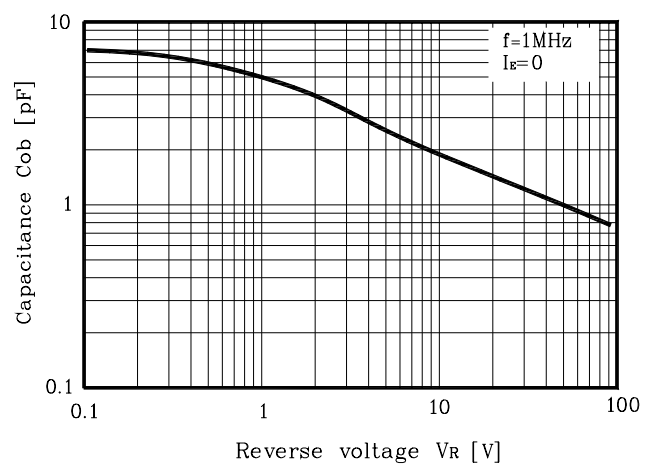

These AUK products are intended for usage in general electronic equipments(Office and communication equipment, measuring equipment, domestic electrification, etc.).

Please make sure that you consult with us before you use these AUK products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, traffic signal, combustion central, all types of safety device, etc.).

AUK cannot accept liability to any damage which may occur in case these AUK products were used in the mentioned equipments without prior consultation with AUK.