



LVC MOS SC-C1420 Series

Rev. A

Description


The **SC-C1420 Series** of quartz crystal oscillators provide enable/disable 3-state LVC MOS compatible signals for bus connected systems. Supplying Pin 1 of the SC-C1420 units with a logic "1" or open enables its Pin 3 output. In the disable mode, Pin 3 presents a high impedance to the load.

Features

- Wide frequency range—4.0MHz to 70.0MHz
- User specified tolerance available
- Space-saving alternative to discrete component oscillators
- 1.8 Volt operation
- High shock resistance, to 1000g
- High Reliability - NEL HALT/HASS qualified for crystal oscillator start-up conditions
- Low Jitter - Wavecrest jitter characterization available
- No internal PLL avoids cascading PLL problems
- Metal lid electrically connected to ground to reduce EMI
- Gold plated pads
- RoHS Compliant, Lead Free Construction

Electrical Connection

Pin	Connection
1	Enable/Disable
2	Ground
3	Output
4	V _{DD}

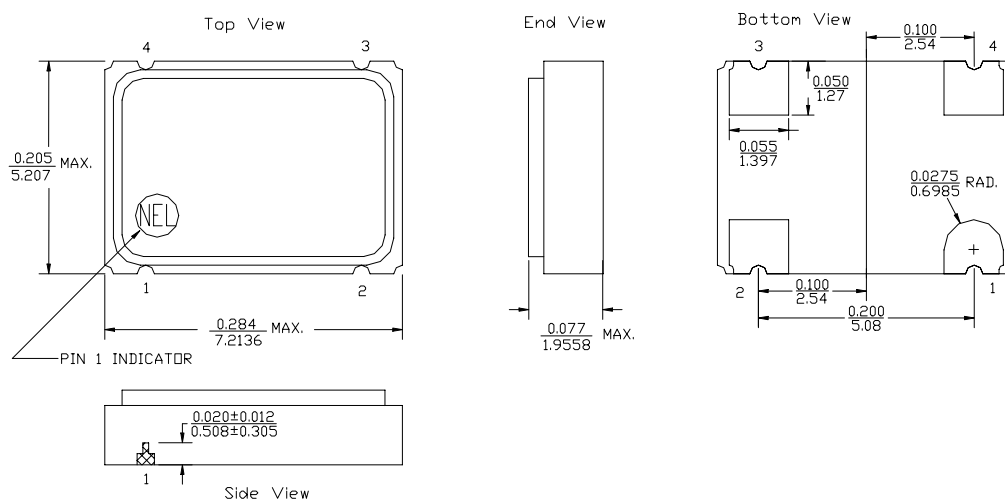

ALL DIMENSIONS: $\frac{\text{IN}}{\text{mm}}$

All tolerances are ±0.005 inches (±0.127 mm) unless otherwise specified.



**FREQUENCY
CONTROLS, INC.**

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591 FAX 262/763-2881

Email: nelsales@nelfc.com www.nelfc.com

SC-C1420 Series Continued
LVCMOS

Rev. A

Operating Conditions and Output Characteristics

Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Frequency	-----	-----	4.0MHz	-----	70.0MHz
Duty Cycle	-----	@ $V_{DD}/2$	45/55%	-----	55/45%
Logic 0	V_{OL}	@ 600 μ A	-----	-----	0.2V
Logic 1	V_{OH}	@ 600 μ A	$V_{DD}-0.2V$	-----	-----
Rise & Fall Time	tr,tf	10-90% V_O	-----	-----	8.0 ns
Jitter, RMS ⁽²⁾	-----	-----	-----	3 psec	-----
T_{pz}	-----	-----	-----	-----	25 ns
Enable Voltage	-----	-----	2.0V	-----	-----
Disable Voltage	-----	-----	-----	-----	0.8V
Frequency Stability ⁽¹⁾	dF/F	Overall conditions including: voltage, calibration, temp.. 10 year aging, shock, vibration	-100ppm	-----	+100ppm

General Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Supply Voltage ⁽³⁾ V_{DD}		1.8V $\pm$ 0.1V	1.7V	1.8V	1.9V
Supply Current	I_{DD}	No Load	0.0 mA	-----	40 mA
Output current	I_O	Low level Output Current	0.0 mA	-----	$\pm$ 16.0 mA
Operating temperature	T_A	-----	0°C	-----	70°C
Storage temperature	T_S	-----	-55°C	-----	125°C
Power Dissipation	P_D	-----	-----	-----	76 mW
Solder temperature	T_L	4 minutes	-----	-----	253°C
Load	-----	-----	-----	-----	15pf
Start-up Time	t_s	20MHz or greater	-----	-----	10 ms
		Less than 20MHz	-----	-----	2 ms

Environmental and Mechanical Characteristics

Mechanical Shock	Per MIL-STD-202, Method 213, Condition E
Thermal Shock	Per MIL-STD-883, Method 1011, Condition A
Vibration	0.060" double amplitude 10 Hz to 55 Hz, 35g's 55Hz to 2000 Hz
Hermetic Seal	Leak rate less than 1×10^{-8} atm.cc/sec

Footnotes:

- 1) Standard frequency stability ($\pm 20, \pm 25, \pm 50$ ppm & others available)
- 2) Jitter performance is frequency dependent. Please contact factory for full Wavecrest characterization.
- 3) External high frequency power supply decoupling required.

Creating a Part Number

SC - C142X - FREQ

Package Code

SC 4 pad 5x7mm SMD

Tolerance/Performance

0 ± 100 ppm 0-70°C
 1 ± 50 ppm 0-70°C
 7 ± 25 ppm 0-70°C
 9 Customer Specific
 A ± 20 ppm 0-70°C
 B ± 50 ppm -40 to +85°C
 C ± 100 ppm -40 to +85°C

Input Voltage

Code	Specification
A	3.3V
B	2.5V
C	1.8V
	5V



**FREQUENCY
CONTROLS, INC.**

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591 FAX 262/763-2881

Email: nelsales@nelfc.com www.nelfc.com