

Features

1. Effective for suppressing common mode noise at high frequencies.
2. Compact design.
3. Excellent solderability characteristics.
4. Lead Free (RoHS Compliance)

Applications


1. Noise suppression in digital bus line equipment
2. IEEE1394a HUB & IEEE1394a control lines.
3. USB host controller & USB, HUB control lines
4. LVDS, panel link line for liquid crystal display panels.

Ordering Information

SCM	-	2	M	3216	-	471	J	T
(1)		(2)	(3)	(4)		(5)	(6)	(7)

(1) Series

SCM : Electrode directed in vertical line



SCM : Vertical Design
SCM - series

(2) Pole type

- 2 : 2 Line (Single)
- 4 : 4 Line (Double)

(5) Common mode impedance (at 100MHz)

First two digits are significant.
Last digits is the number of zeros following

(3) Material & Design

- M : General Signal line
- Y,S : High speed differential signal line

(6) Termination

J : Nickel barrier


(4) Dimension

- First two digits : length(mm)
- Last two digits : width(mm)

(7) Packaging

- B : Bulk Packing
- T : Tape & Reel (Φ 178mm [7inches])
- L : Tape & Reel (Φ 254mm [10inches])

Shape and Dimensions

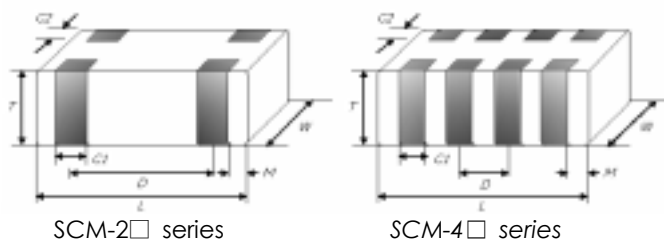

unit : mm [inches]

Type	L	W	T	C ₁	C ₂	D	M
SCM-2□3216-	3.2±0.2 [.126±.008]	1.6±0.2 [.063±.008]	1.3±0.1 [.051±.004]	0.7±0.2 [.028±.008]	0.3±0.2 [.012±.008]	2.1±0.2 [.083±.008]	0.20±0.1 [.008±.004]
SCM-4□3216-	3.2±0.2 [.126±.008]	1.6±0.2 [.063±.008]	1.3±0.1 [.051±.004]	0.4±0.2 [.016±.008]	0.3±0.2 [.012±.008]	0.80±0.1 [.031±.004]	0.20±0.1 [.008±.004]


Electrical Parameters

Part No.	Impedance[Ω] at 100MK.		DC Resistance Max.(Ω)	Rated current Max.(mA)	Rated Voltage Max.(V)	Insulation Resistance Min.(MΩ)
	Typ	Tolerance				
SCM-2M3216-700□□	70	±25%	0.50	400	16	100
SCM-2M3216-900□□	90		0.55	400	16	100
SCM-2M3216-121□□	120		0.60	400	16	100
SCM-2M3216-181□□	180		0.65	330	16	100
SCM-2M3216-221□□	220		0.70	330	16	100
SCM-2M3216-471□□	470		0.80	250	16	100
SCM-4M3216-700□□	70		0.60	400	10	100
SCM-4M3216-900□□	90		0.70	400	10	100
SCM-4M3216-121□□	120		0.80	400	10	100
SCM-4M3216-181□□	180		0.90	330	10	100
SCM-4M3216-221□□	220		0.90	330	10	100
SCM-4S3216-900□□	90		0.70	400	10	100
SCM-4S3216-121□□	120		0.80	400	10	100
SCM-4S3216-181□□	180		1.00	330	10	100
SCM-4S3216-301□□	300		1.20	250	10	100


Electrical Characteristic Curves

3216 – 2Line (Single)


SCM-2M3216-700J

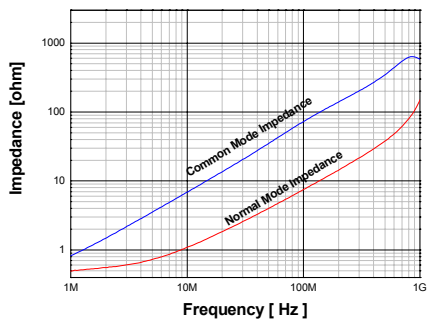


SCM-2M3216-900J

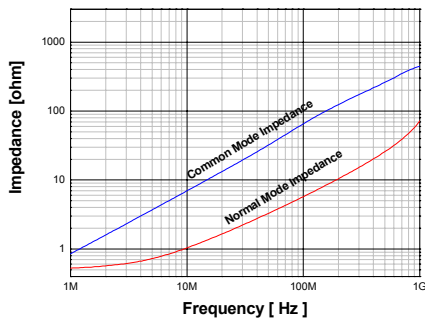


SCM-2M3216-121J

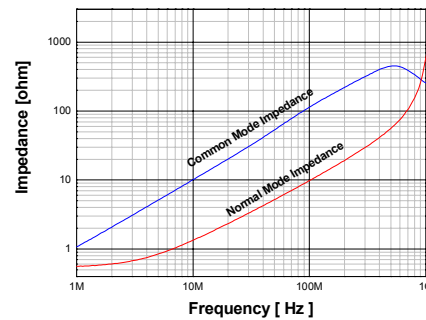


SCM-2M3216-181J

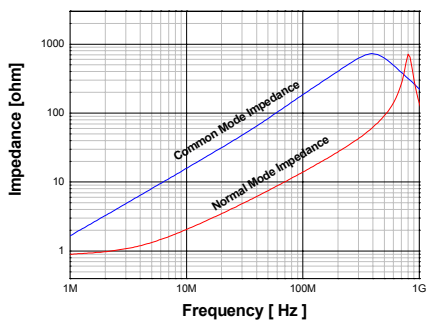

SCM-2M3216-221J

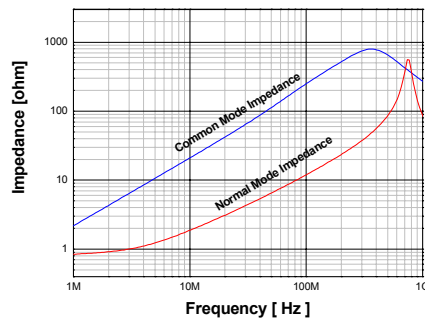


SCM-2M3216-471J

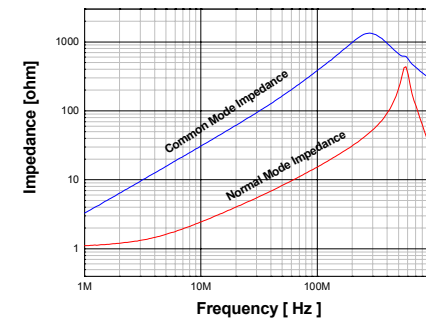


3216 – 4Line (Double)


SCM-4M3216-700J

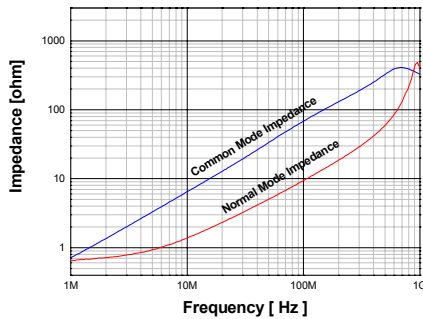


SCM-4M3216-900J

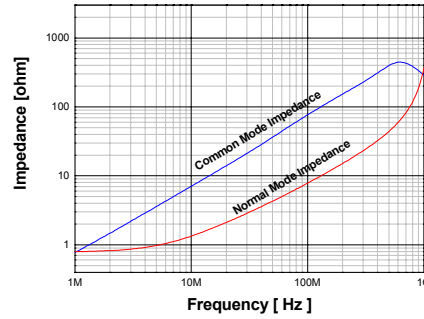


SCM-4M3216-121J

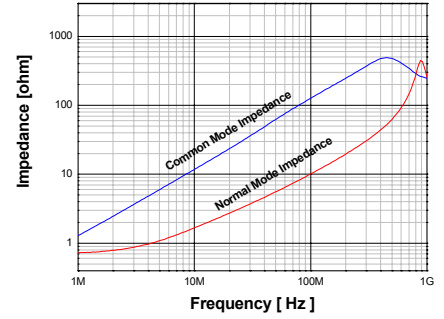

SCM-4M3216-181J

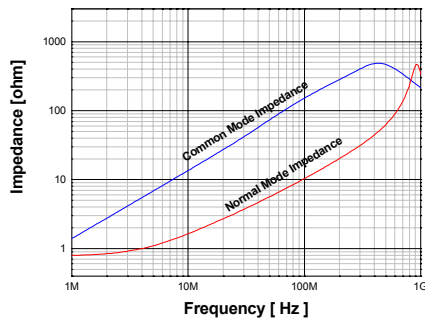


SCM-4M3216-221J

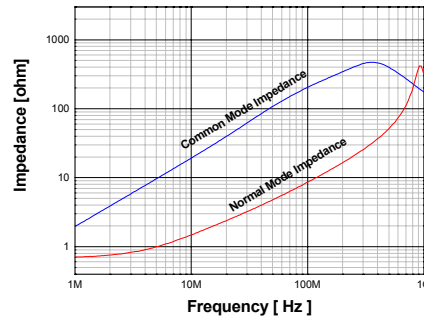


3216 – 4Line (Double) – S type


SCM-4S3216-900J

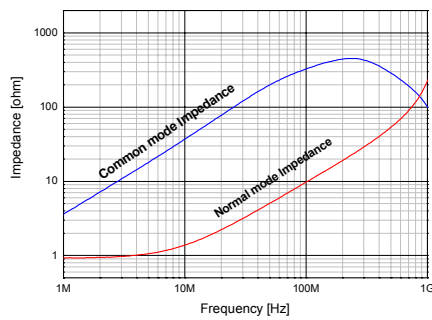


SCM-4S3216-121J

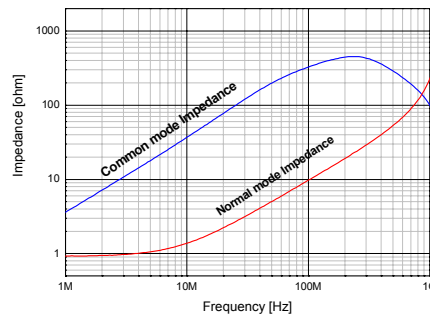





SCM-4S3216-181J

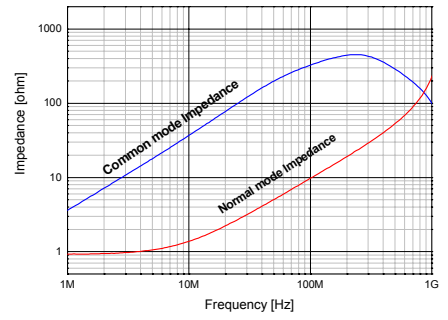

SCM-4S3216-301J

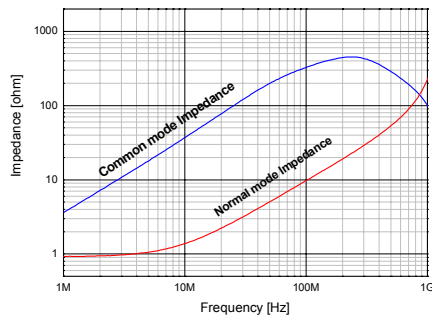

Characteristic Impedance vs. Frequency characteristics

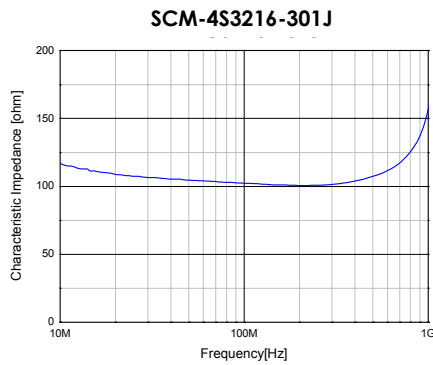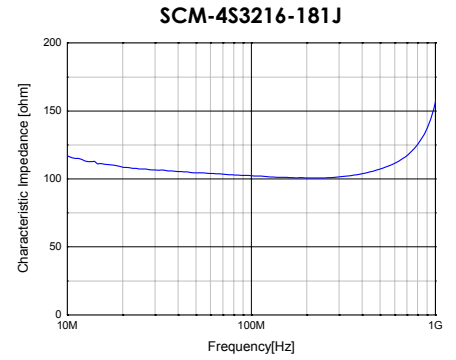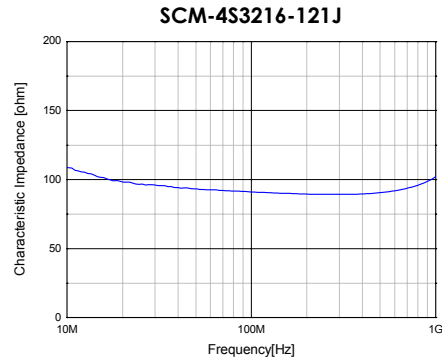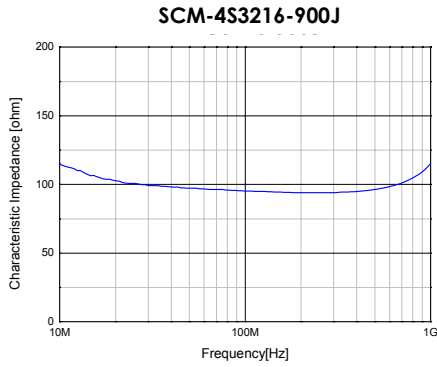

Insertion loss vs. Frequency Characteristics

