


Features

- Low Forward Voltage Drop
- Fast Switching
- Very High Density (Six diode Elements in a sub-miniature Package)
- **Lead Free/RoHS Compliant (Note 2)**
- **"Green" Device (Note 3)**


Mechanical Data

- Case: DFN1616-6
- Case material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (NiPdAu Finish annealed over Copper leadframe).
- Polarity: Pin 1 Dot and Center Pad notch, See diagram
- Marking Code: ST (See Page 2)
- Weight: 0.004 grams (approximate)

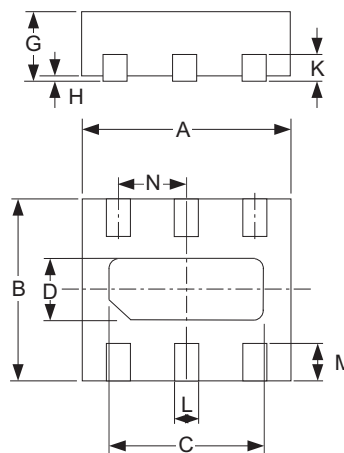

DFN1616-6			
Dim	Min	Max	Typ
A	1.55	1.675	1.60
B	1.55	1.675	1.60
C	1.10	1.30	1.20
D	0.30	0.50	0.40
G	0.545	0.605	0.575
H	0	0.05	0.02
K	—	—	0.13
L	0.20	0.30	0.25
M	0.275	0.375	0.325
N	—	—	0.50

All Dimensions in mm



TOP VIEW SCHEMATIC

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	30	V
Forward Continuous Current	I_{FM}	200	mA
Non-Repetitive Peak Forward Surge Current @ t < 1.0s	I_{FSM}	625	mA
Power Dissipation (total package)	P_d	250	mW
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	400	°C/W
Operating Temperature Range	T_j	-55 to +125	°C
Storage Temperature Range	T_{STG}	-65 to +125	°C

Electrical Characteristics @ T_A = 25°C unless otherwise specified


Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 1)	$V_{(BR)R}$	30	—	—	V	$I_R = 100\mu A$
Forward Voltage	V_F	—	260 — — 525	300 360 460 570	mV	$I_F = 0.1mA$ $I_F = 1.0mA$ $I_F = 10mA$ $I_F = 30mA$
Reverse Current (Note 1)	I_R	—	25 30 35 100	125 150 500 700	nA	$V_R = 1V$ $V_R = 2V$ $V_R = 5V$ $V_R = 30V$
Reverse Recovery Time	t_{rr}	—	—	5.0	ns	$I_F = I_R = 10mA$, $I_{rr} = 0.1 \times I_R$, $R_L = 100\Omega$

- Notes:
1. Short duration test pulse used to minimize self-heating effect.
 2. No purposefully added lead.
 3. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.

Ordering Information

Device	Packaging	Shipping
SDM6CC-7	DFN1616-6	3000/Tape & Reel

Marking Information







ST = Product Type Marking Code
 YM = Date Code Marking
 Y = Year ex: T = 2006
 M = Month ex: 9 = September

Date Code Key


Year	2006	2007	2008	2009	2010	2011	2012
Code	T	U	V	W	X	Y	Z

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

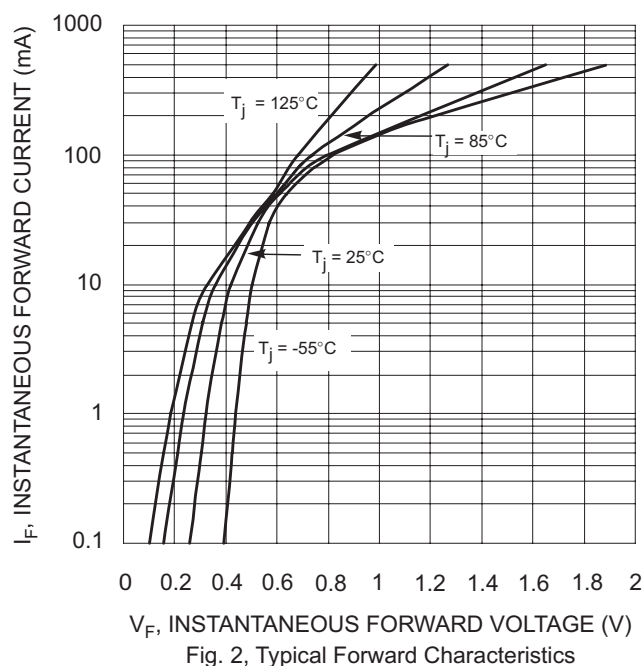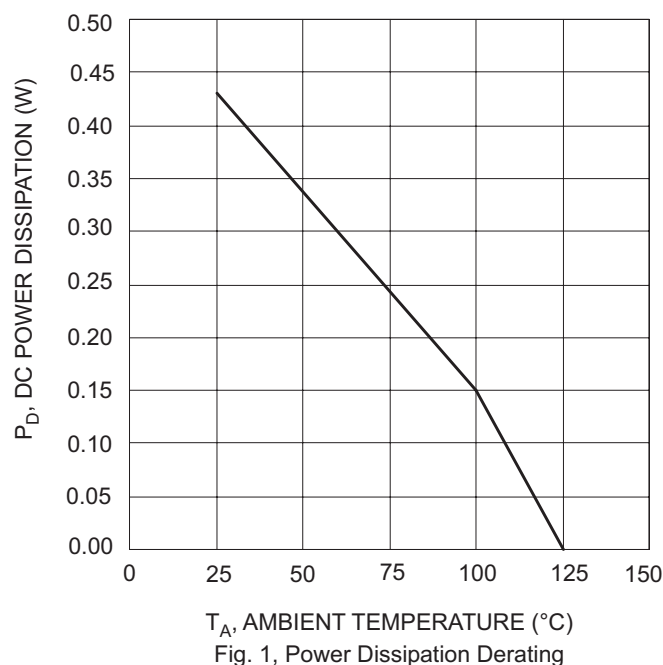

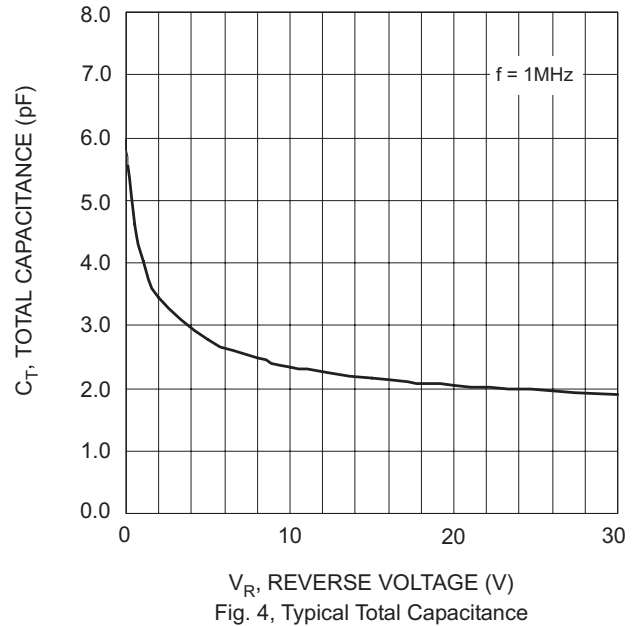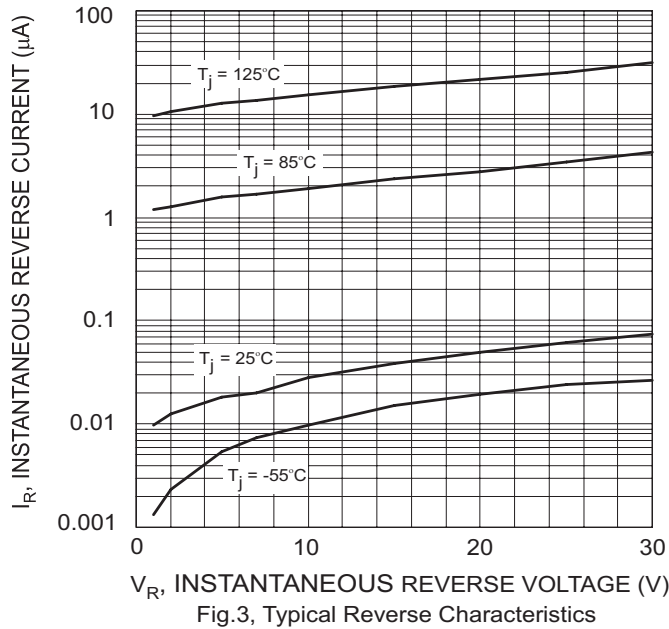

Suggested Pad Layout

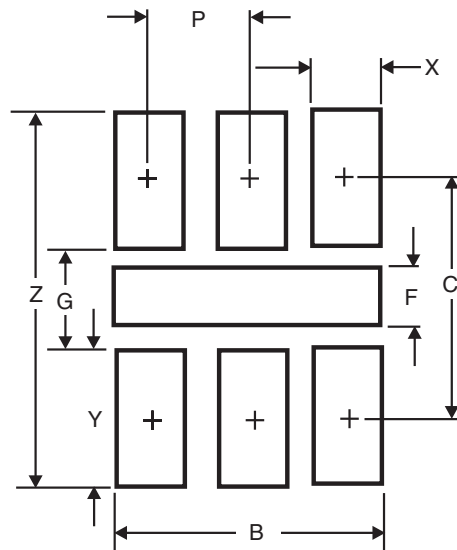

Dimensions		
Dim	Inches	Millimeters
B	.051	1.30
C	.060	1.52
P	.020	0.50
F	.018	0.45
G	.035	0.89
X	.012	0.30
Y	.025	0.63
Z	.085	2.15

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.