

Features



- Compact type
- Radiation size 1.25mm × 1.7mm
- Surface mount lead configuration

Ordering Information

Type NO.	Marking	Package Code
SDZ8V2D	Z7	SOD-323

Outline Dimensions

unit : mm

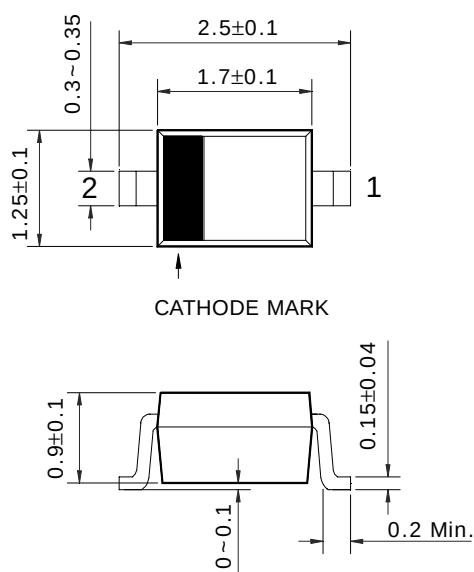

PIN Connections

1. Anode
2. Cathode

Absolute maximum ratings

(Ta=25°C)

Characteristic	Symbol	Ratings	Unit
Power dissipation	P_D	200	mW
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-55 ~ 150	°C

Electrical Characteristics

(Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Zener voltage	V_Z	$I_Z=5\text{mA}$	7.84	-	8.56	V
Dynamic impedance	Z_{ZT}	$I_Z=5\text{mA}$	-	-	7	Ω
KNEE dynamic impedance	Z_{ZK}	$I_Z=0.25\text{mA}$	-	-	600	Ω
Reverse current	I_R	$V_R=6.5\text{V}$	-	-	0.5	μA

Fig. 1 P_D - T_a

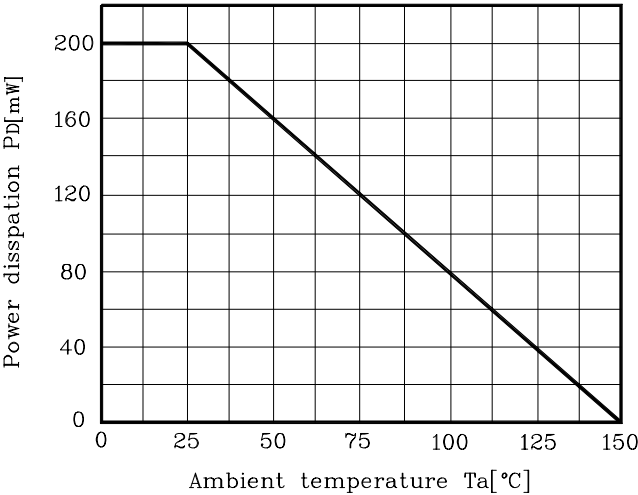


Fig. 2 I_Z - V_Z

