

Features



- Compact type
- Radiation size 1.6mm × 2.9mm
- Surface mount lead configuration

Ordering Information

Type NO.	Marking	Package Code
SDZ5V1F	Z2	SOT-23F

Outline Dimensions

unit : mm

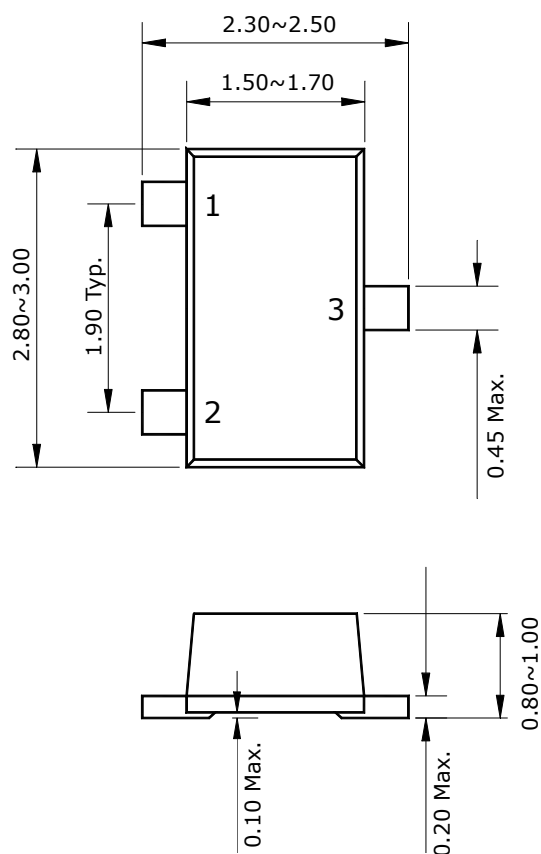

PIN Connections

1. Anode
2. NC
3. Cathode

Absolute Maximum Ratings

(Ta=25°C)



Characteristic	Symbol	Ratings	Unit
Power dissipation	P_D	200	mW
Junction temperature	T_J	150	°C
Storage temperature range	T_{stg}	-55~150	°C

Electrical Characteristics

(Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Zener voltage	V_Z	$I_Z=5mA$	4.88	-	5.32	V
Dynamic impedance	Z_{ZT}	$I_Z=5mA$	-	-	70	Ω
KNEE dynamic impedance	Z_{ZK}	$I_Z=0.25mA$	-	-	2050	Ω
Reverse current	I_R	$V_R=2V$	-	-	2	μA

Electrical Characteristic Curves

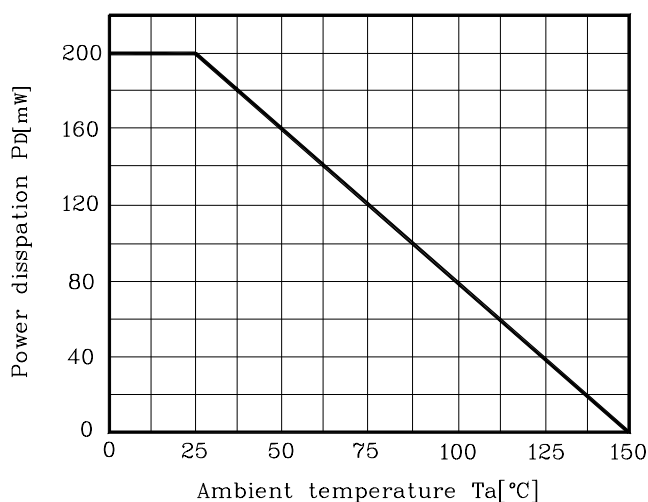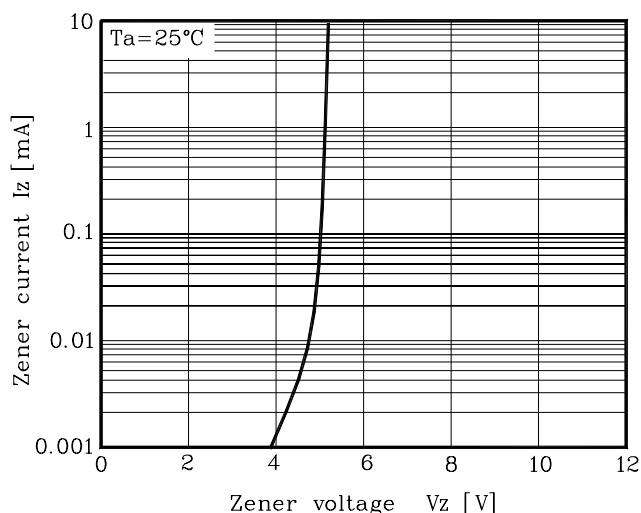Fig. 1 P_D - T_a Fig. 2 I_Z - V_Z 

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life (atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.