


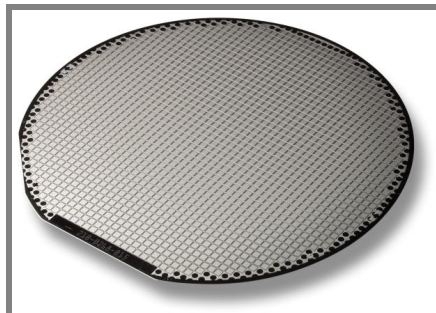

SEMICELL CAL-DIODE

SKCD 47 C 060 I3

$I_F = 80 \text{ A}$

$V_{RRM} = 600 \text{ V}$

Size: 6,86 mm X 6,86 mm

Package: wafer frame

Features

- 600V, 1200V and 1700V
- low forward voltage drop
- easy paralleling due to a small forward voltage spread
- low temperature dependence
- very soft recovery behavior
- small switching losses
- high ruggedness
- compatible to thick wire bonding
- compatible to all standard solder processes

Typical Applications

- freewheeling diode for IGBT
- optimal at frequencies > 8 kHz

Absolute Maximum Ratings

Symbol	Conditions	Values	Units
V_{RRM}	$T_{vj} = 25^\circ\text{C}$, $I_R = 0,2 \text{ mA}$	600	V
$I_{F(AV)}$	$T_h = 80^\circ\text{C}$, $T_{vjmax} = 150^\circ\text{C}$	60	A
I_{FSM}	$T_{vj} = 25^\circ\text{C}$, 10 ms, half sine wave		A
	$T_{vjmax} = 150^\circ\text{C}$, 10 ms, half sine wave	720	A
T_{vjmax}		+ 150	$^\circ\text{C}$

Electrical Characteristics

Symbol	Conditions	min.	typ.	max.	Units
I^2t	T_{vjmax} , 10 ms, half sine wave			2600	A^2s
I_R	$T_{vj} = 25^\circ\text{C}$, V_{RRM}			0,2	mA
	$T_{vj} = 125^\circ\text{C}$, V_{RRM}			4	mA
V_F	$T_{vj} = 25^\circ\text{C}$, $I_F = 85 \text{ A}$		1,35	1,6	V
	$T_{vj} = 125^\circ\text{C}$, $I_F = 85 \text{ A}$		1,35	1,6	V
$V_{(TO)}$	$T_{vj} = 125^\circ\text{C}$		0,9		V
r_T	$T_{vj} = 125^\circ\text{C}$		5		$\text{m}\Omega$

Dynamic Characteristics


Symbol	Conditions	min.	typ.	max.	Units
t_{rr}	$T_{vj} = 25^\circ\text{C}$, 75 A, 300 V, 1000 A/ μs				ns
	$T_{vj} = 125^\circ\text{C}$, 75 A, 300 V, 1000 A/ μs				ns
Q_{rr}	$T_{vj} = 25^\circ\text{C}$, 75 A, 300 V, 1000 A/ μs				μC
	$T_{vj} = 125^\circ\text{C}$, 75 A, 300 V, 1000 A/ μs		5,5		μC
I_{rrm}	$T_{vj} = 25^\circ\text{C}$, 75 A, 300 V, 1000 A/ μs				A
	$T_{vj} = 125^\circ\text{C}$, 75 A, 300 V, 1000 A/ μs		45		A


Thermal Characteristics

Symbol	Conditions	min.	typ.	max.	Units
T_{vj}		- 40		+ 150	$^\circ\text{C}$
T_{stg}		- 40		+ 150	$^\circ\text{C}$
T_{solder}	10 min			+ 250	$^\circ\text{C}$
T_{solder}	5 min			+ 320	$^\circ\text{C}$
$R_{th(j-h)}$	soldered on 0,38 mm DCB, reference point on copper heatsink close to the chip.		0,7		K / W

Mechanical Characteristics

Parameter	Units
raster size	6,86 x 6,86 mm
Area total	47,06 mm^2
Chips / wafer	208 pcs
Anode metallisation	bondable (Al)
Cathode metallisation	solderable (Ag / Ni)
wire bond	Al, diameter $\leq 500 \mu\text{m}$



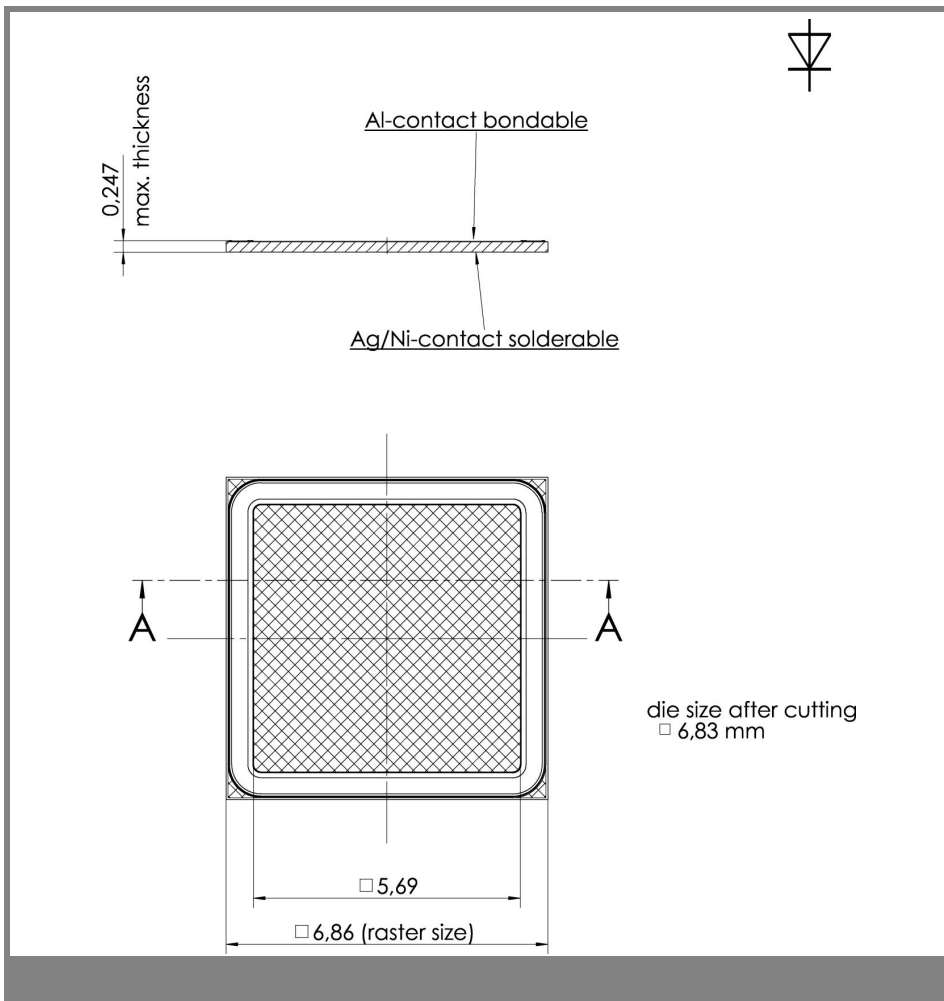

This technical information specifies semiconductor devices. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.