


SKCD 06 C 060 I HD

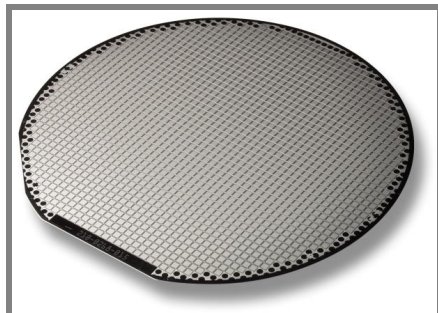

SEMICELL CAL-DIODE

SKCD 06 C 060 I HD

$I_F = 20\text{ A}$

$V_{RRM} = 600\text{ V}$

Size: 2,44 mm X 2,44 mm

Package: wafer frame

Features

- high current density
- easy paralleling due to a small forward voltage spread and a positive temperature coefficient
- very soft recovery behavior
- small switching losses
- high ruggedness
- compatible to thick wire bonding
- compatible to standard solder processes

Typical Applications

- freewheeling diode for 600V IGBT

Absolute Maximum Ratings

Symbol	Conditions	Values	Units
V_{RRM}	$T_{vj} = 25\text{ °C}$, $I_R = 0,1\text{ mA}$	600	V
$I_{F(AV)}$	80 °C , $T_{vjmax} = 175\text{ °C}$	16	A
I_{FSM}	$T_{vj} = 25\text{ °C}$, 10ms, half sine wave	110	A
	$T_{vj} = 150\text{ °C}$, 10ms, half sine wave	95	A
T_{vjmax}		+ 175	°C

Electrical Characteristics

Symbol	Conditions	min.	typ.	max.	Units
I^2t	$T_{vj} = 150\text{ °C}$, 10ms, half sine wave			45	A ² s
I_R	$T_{vj} = 25\text{ °C}$, V_{RRM}			0,1	mA
	$T_{vj} = 150\text{ °C}$, V_{RRM}				mA
V_F	$T_{vj} = 25\text{ °C}$, $I_F = 12\text{ A}$		1,35		V
	$T_{vj} = 150\text{ °C}$, $I_F = 12\text{ A}$		1,31		V
$V_{(TO)}$	$T_{vj} = 150\text{ °C}$		0,85		V
r_T	$T_{vj} = 150\text{ °C}$		40		mΩ

Dynamic Characteristics


Symbol	Conditions	min.	typ.	max.	Units
t_{rr}	$T_{vj} = 25\text{ °C}$, 9,5 A, 300 V, 150 A/μs				ns
	$T_{vj} = 150\text{ °C}$, 9,5 A, 300 V, 150 A/μs				ns
Q_{rr}	$T_{vj} = 25\text{ °C}$, 9,5 A, 300 V, 150 A/μs				μC
	$T_{vj} = 150\text{ °C}$, 9,5 A, 300 V, 150 A/μs		0,93		μC
I_{rrm}	$T_{vj} = 25\text{ °C}$, 9,5 A, 300 V, 150 A/μs				A
	$T_{vj} = 150\text{ °C}$, 9,5 A, 300 V, 150 A/μs		5,2		A


Thermal Characteristics

Symbol	Conditions	min.	typ.	max.	Units
T_{vj}		- 40		+ 175	°C
T_{stg}		- 40		+ 175	°C
T_{solder}	10 min			+ 250	°C
T_{solder}	5 min			+ 320	°C
$R_{th(j-h)}$	soldered on 0,38 mm DCB, reference point on copper heatsink close to the chip.		2,46		K / W

Mechanical Characteristics

Parameter	Units
raster size	2,44 x 2,44 mm
Area total	5,95 mm ²
Chips / wafer	1777 pcs
Anode metallisation	bondable (Al)
Cathode metallisation	solderable (Ag / Ni)
wire bond	Al, diameter ≤ 500 μm



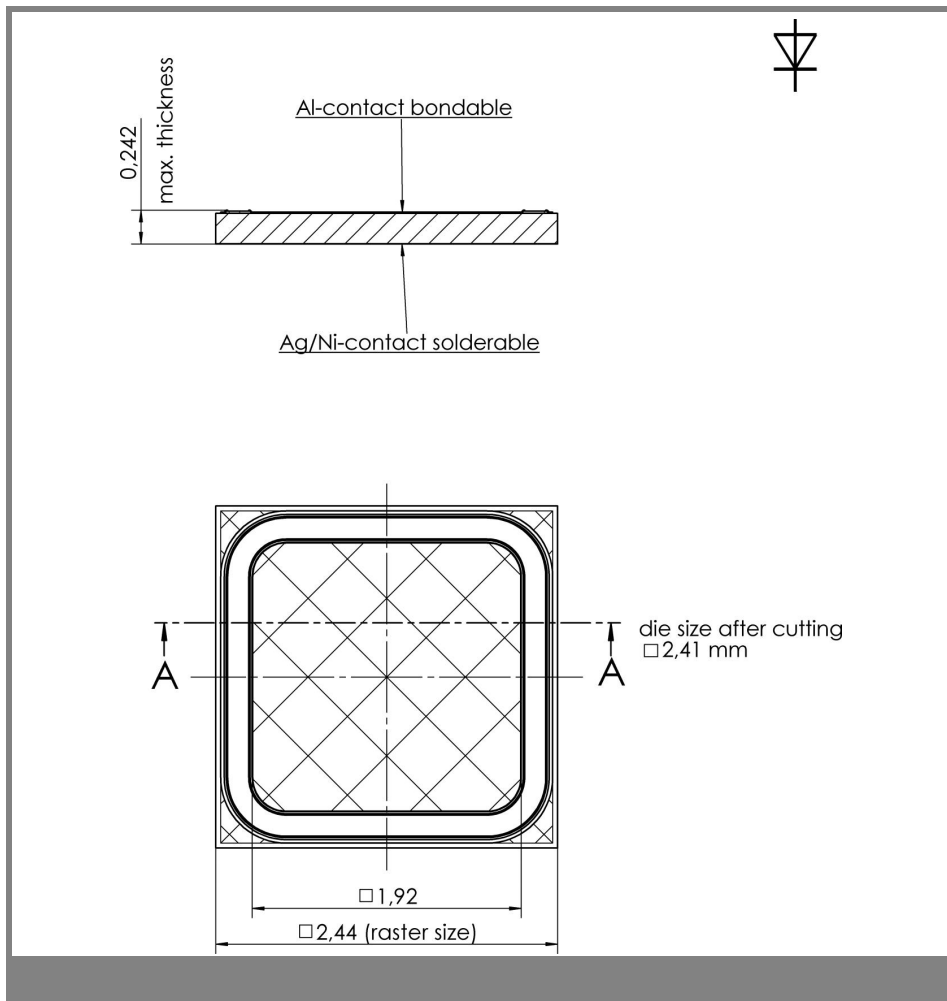

This technical information specifies semiconductor devices. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.