

## Specifications

| Parameter                        |             | Unit       | Minimum | Typical | Maximum |
|----------------------------------|-------------|------------|---------|---------|---------|
| Center Frequency                 |             | MHz        | -       | 800     | -       |
| Insertion Loss                   |             | dB         | -       | 2       | 5       |
| 1 dB Bandwidth                   |             | MHz        | -       | 36.24   | -       |
| 3 dB Bandwidth                   |             | MHz        | 53.3    | 55      | -       |
| 35 dB Bandwidth                  |             | MHz        | -       | 134.53  | 55      |
| Passband Variation(f0±20MHz)     |             | dB         | -       | 0.1     | 1       |
| Absolute Delay                   |             | usec       | -       | 0.02    | -       |
| Group Delay Variation(f0±20MHz)  |             | nsec       | -       | 8       | 20      |
| Ultimate Rejection               | 690～770MHz  | dB         | 3       | 11      | -       |
|                                  | 830～910MHz  | dB         | 3       | 4       | -       |
|                                  | 1～690MHz    | dB         | 35      | 48      | -       |
|                                  | 910～1000MHz | dB         | 35      | 50      | -       |
| Material Temperature coefficient |             | KHz/°C     | -54.4   |         |         |
| Ambient Temperature              |             | °C         | 25      |         |         |
| Package Size                     |             | SMD3.8*3.8 |         |         |         |

### Notes:

1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show

## Matching Configuration

INPUT  
50  $\Omega$



OUTPUT  
50  $\Omega$

**Source / Load Impedance = 50 ohm**


Notes - Component values may change depending on board layout.



**SIPAT Co., Ltd.**  
( CETC No. 26 Research Institute )  
Nanping Huayuan Road No. 14  
Chongqing, China, 400060

|             |            |      |     |
|-------------|------------|------|-----|
| Part Number | SP80001    |      |     |
| Rev. Date   | 2007-04-30 |      |     |
| Ver.        | 1.0        | Page | 1/4 |

## Package Dimension

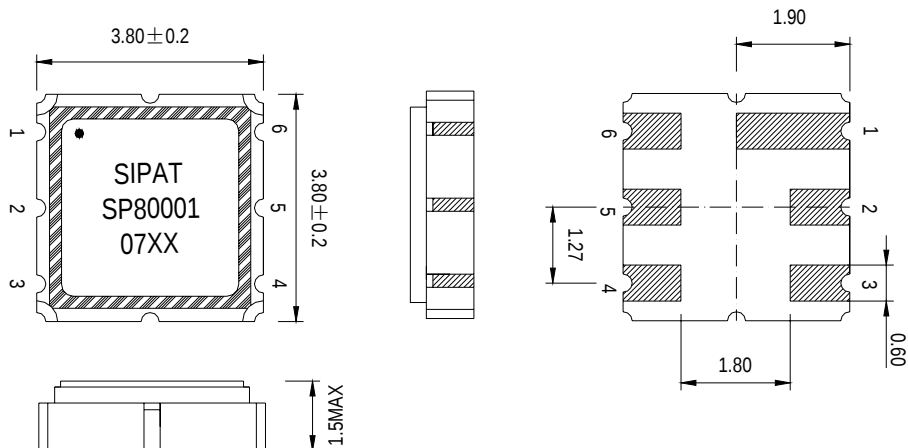

- 1) ∴ Pad Number 1 Index
- 2) SIPAT: Manufacturer name
- 3) SP80001: Part Number
- 4) 07XX: Date Code

|        |         |
|--------|---------|
| Input  | 2       |
| Output | 5       |
| Ground | 1,3,4,6 |

**Package: SMD3.8\*3.8**

**Unit: mm**




**SIPAT Co., Ltd.**  
( CETC No. 26 Research Institute )  
Nanping Huayuan Road No. 14  
Chongqing, China, 400060

|             |            |          |
|-------------|------------|----------|
| Part Number | SP80001    |          |
| Rev. Date   | 2007-04-30 |          |
| Ver.        | 1.0        | Page 2/4 |


## Typical Performance

Frequency Response

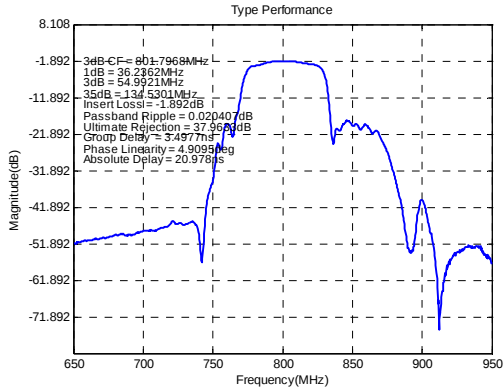


Horizontal: 50MHz/Div Vertical: 10dB/Div

Passband Response

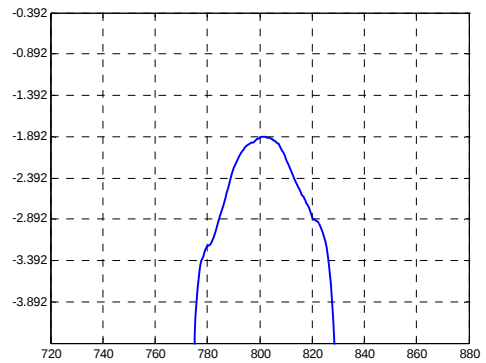


Horizontal: 20MHz/Div Vertical: 0.5dB/Div

Group Delay Variation (f0±20MHz)

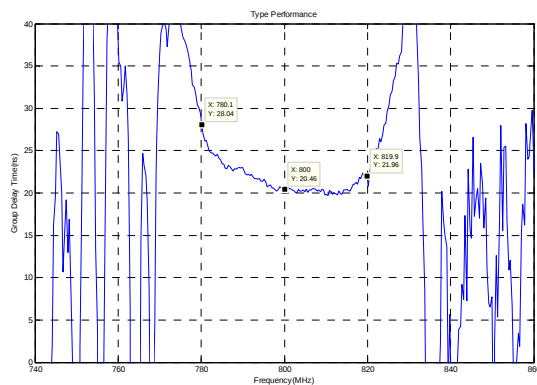


Horizontal: 20MHz/Div Vertical: 5ns/Div

Phase Linearity (f0±20MHz)

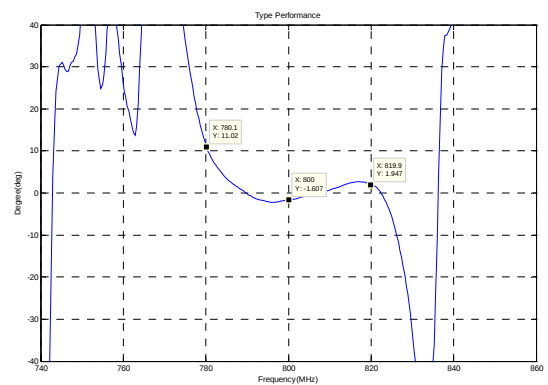


Horizontal: 20MHz/Div Vertical: 10deg/Div

Smith Chart S11

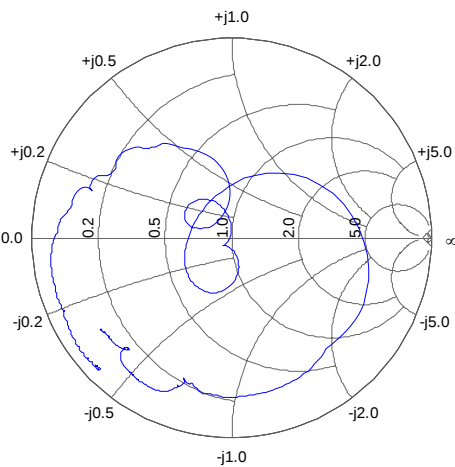

Smith Chart S22

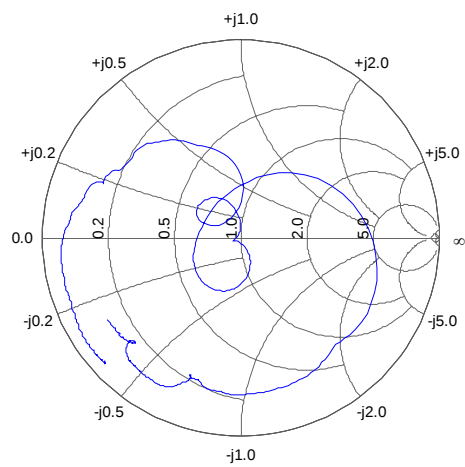

**SIPAT Co., Ltd.**  
( CETC No. 26 Research Institute )  
Nanping Huayuan Road No. 14  
Chongqing, China, 400060

Part Number

SP80001

Rev. Date

2007-04-30

Ver.

1.0

Page 3/4

### Maximum Ratings

|                             |     |                |
|-----------------------------|-----|----------------|
| Operating Temperature Range | °C  | [-40°C;+85°C]  |
| Storage Temperature Range   | °C  | [-40°C;+105°C] |
| DC Voltage                  | V   | 0              |
| Input Power                 | dBm | 10 max         |
| ESD Class                   |     | 1              |



**SIPAT Co., Ltd.**  
( CETC No. 26 Research Institute )  
Nanping Huayuan Road No. 14  
Chongqing, China, 400060

Part Number SP80001

Rev. Date 2007-04-30

Ver. 1.0

Page 4/4