

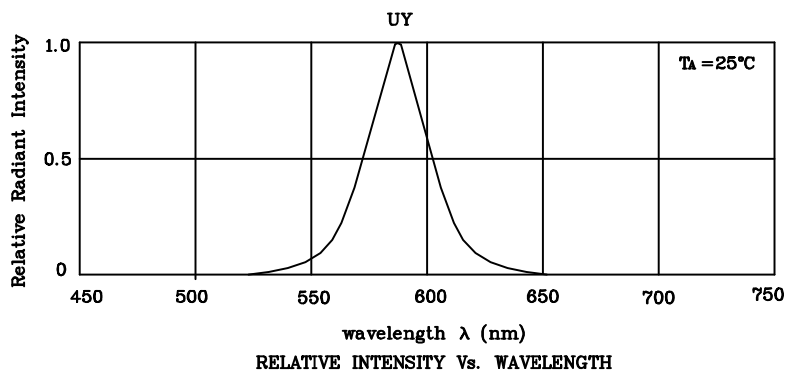
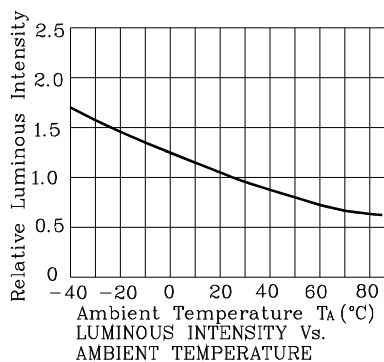
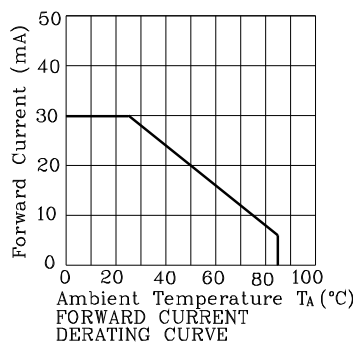



Part Number	Emitting Color	Emitting Material	Luminous Intensity (IF=10mA) ucd		Wavelength nm λ P	Description
			min.	typ.		
DUY08C-A	Yellow	GaAsP/GaP	800	2990	590	Common Cathode, Rt. Hand Decimal.
Published Date : MAR 05,2008		Drawing No : SDSA2027			V3	Checked : Shin Chi P.1/4

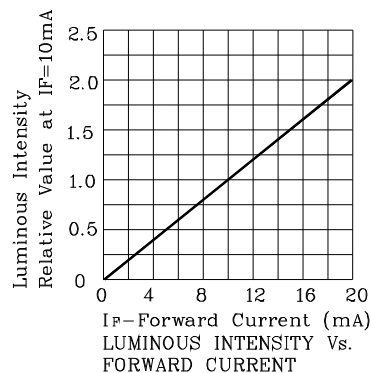

❖ **UY**

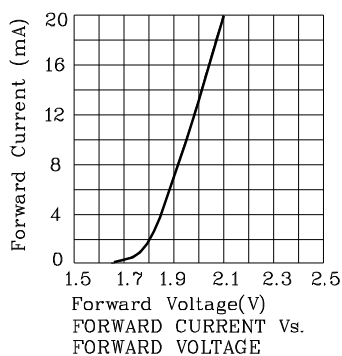

Wave Soldering Profile For Lead-free Through-hole LED.

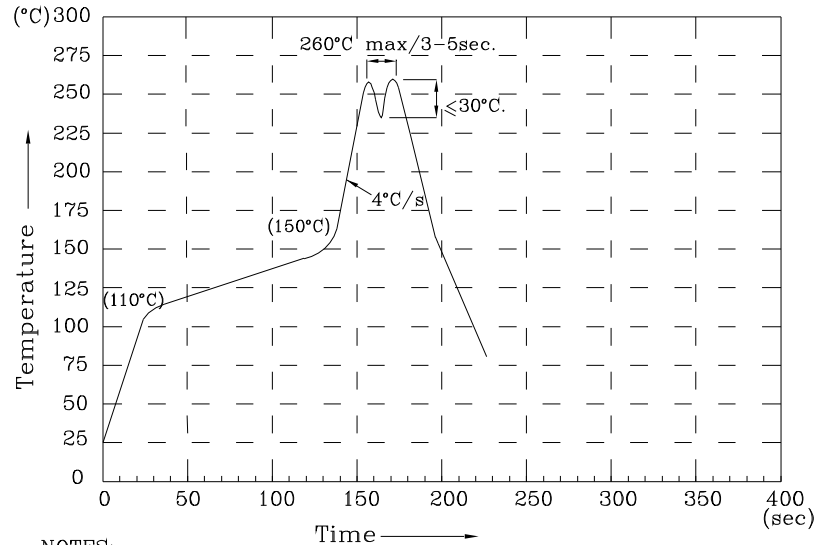

NOTES:

1. Recommend the wave temperature 245°C~260°C. The maximum soldering temperature should be less than 260°C.
2. Do not apply stress on epoxy resins when temperature is over 85 degree°C.
3. The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
4. No more than once.

Remarks:


If special sorting is required (e.g. binning based on forward voltage, luminous intensity/ luminous flux or wavelength), the typical accuracy of the sorting process is as follows:

1. Wavelength: +/-1nm
2. Luminous Intensity/ luminous flux: +/-15%
3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

PACKING & LABEL SPECIFICATIONS

DUY08C-A

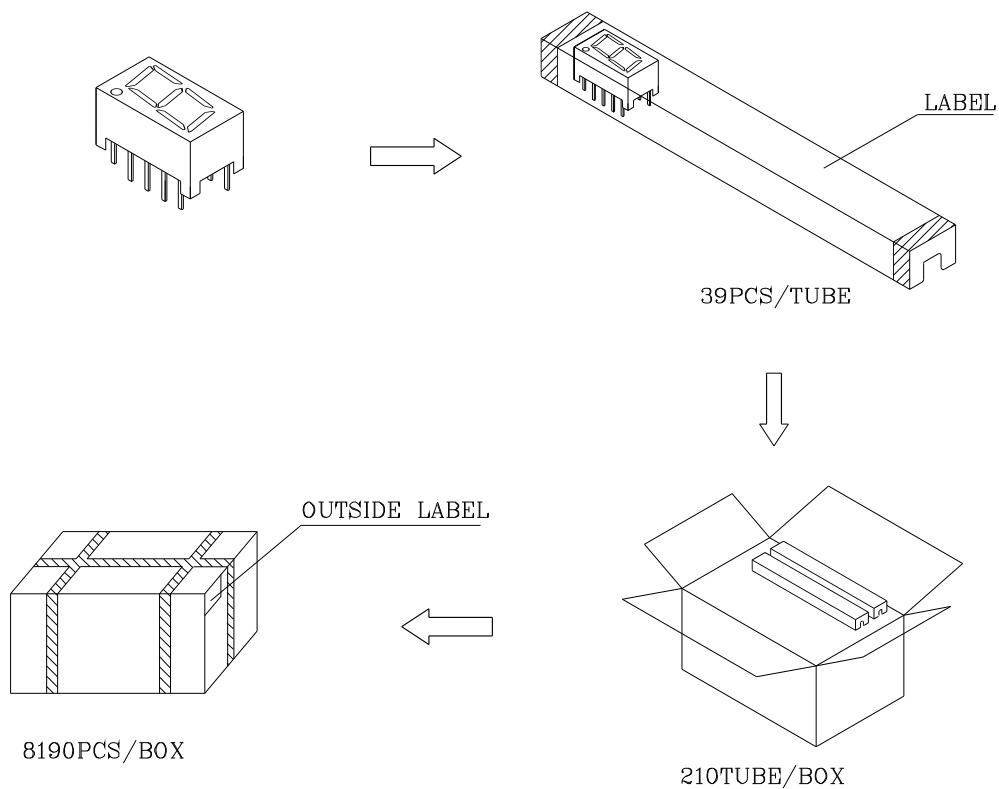

Inside LABEL Paste On The IC-tube

SunLED	PART NO: Dxx08x-A	QC
QTY: 39 PCS	CODE: xx	PASSID
XXXXXXXXXX-XXXX		XX XX XX
LOT NO.		FQC
RoHS Compliant		Date
		Number OF FQC

Outside LABEL Paste On The Box

BOX Number	XXXX	XXXX	BIN CODE
Dxx08x-A	8190	XX	
Number OF QA		Date	