

4mm SQUARE THIN TYPE ISOLATOR

MODEL ESI-4DC [] 0836 M 01- T

(1) (2) (3) (4) (5) (6)

(1) Series ESI-4DC ; 1.8mm Height

(2) Rotating Direction (R or L)


(3) Center Frequency

(4) M ; MHz

(5) Control No.

(6) T ; Taping

Blank ; Bulk

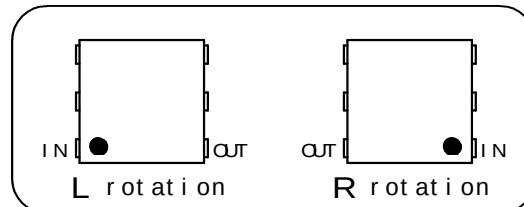


Target Specification

Frequency (MHz)	Ins. Loss Max. (dB)	Isolation Min. (dB)	V.S.W.R. Max.	Attenuation		Handling Power Max. (W)	Reflection Power Max. (W)
				at 2f Min. (dB)	at 3f Min. (dB)		
824-849	0.75	12	1.6	15	15	5.0	1.0

Operating Temperature(deg.C) ; -35 to +85

Impedance ; 50 ohms Typ.

Shape & Size

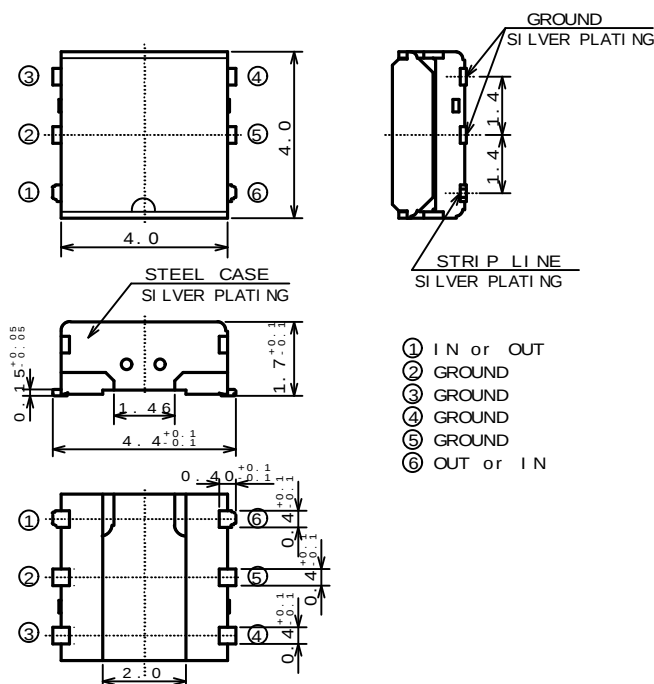

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE IN mm
TOLERANCES ARE +/-0.2mm

TAE593-4



Hitachi Metals, Ltd. Tottori Works