

## Type: CS-5F

### Product Description


- 5.5 × 5.5mm Max.(L × W), 4.5mm Max. Height.
- Inductance: 5 μ H Max.
- Operating frequency:300MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements



### Feature


- Variable shielded type.
- RoHS Compliance

### Dimensions (mm)

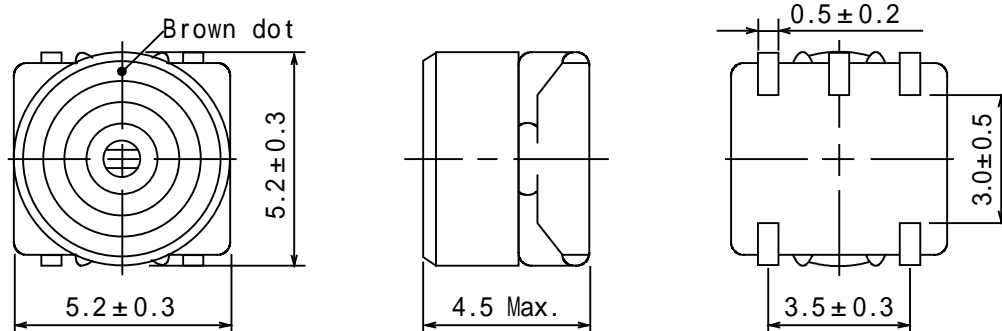

- \* Dimension does not include solder used on coil.
- \* Pin pitch should be measured at the root of terminal.

### Connection (Bottom View)



“ S ” is winding start.

### Specification (Part No. 5204-T037)

| Item            | ( 1 - 3 )                  | Measuring Conditions |
|-----------------|----------------------------|----------------------|
| Tuning capacity | 2 1 . 8 p F ± 3 % Variable | 5 5 . 8 7 5 M H z    |
| Unloaded Q      | 3 0 Min.                   | 5 5 . 8 7 5 M H z    |