



### T-1 Wire Terminal (standard)

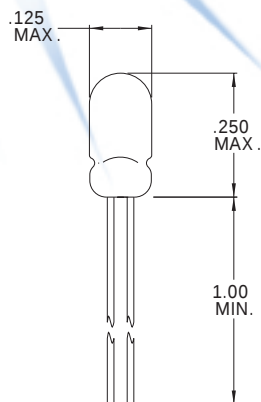

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM6151      | 5.0            | .060 | .150 | 5,000      | C-2R          |
| CM6211      | 5.0            | .080 | .150 | 15,000     | C-2R          |
| CM7214      | 5.0            | .115 | .220 | 5,000      | C-2R          |
| CM7215      | 5.0            | .115 | .190 | 10,000     | C-2R          |
| CM7216      | 5.0            | .125 | .250 | 5,000      | C-2R          |
| CM8175      | 5.0            | .125 | .250 | 5,000      | C-2R          |
| CM8179      | 5.0            | .125 | .250 | 5,000      | C-2R          |
| CM8602      | 5.0            | .017 | .005 | 10,000     | C-2R          |
| CM8729      | 5.0            | .045 | .040 | 10,000     | C-2R          |
| CM7218      | 10.0           | .027 | .100 | 10,000     | C-2F          |
| CM7219      | 12.0           | .060 | .150 | 10,000     | C-2F          |
| CM23        | 14.0           | .040 | .150 | 16,000     | C-2V          |
| CM8111      | 14.0           | .065 | .150 | 10,000     | C-2F          |
| CM7220      | 18.0           | .026 | .150 | 10,000     | C-2F          |
| CM6838      | 28.0           | .024 | .150 | 4,000      | CC-2F         |

### T-1 Sub-Midget Flange Base



| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM7244      | 1.25           | .012 | .004 | 1,000      | C-6           |
| CM7245      | 1.35           | .220 | .020 | 25,000     | C-2R          |
| CM7226      | 1.5            | .015 | .010 | 5,000      | C-2R          |
| CM7227      | 1.5            | .066 | .015 | 100,000    | C-2R          |
| CM7228      | 1.5            | .008 | .001 | 10,000     | C-2V          |
| CM8102      | 1.5            | .075 | .030 | 16,000     | C-2R          |
| CM7246      | 2.5            | .015 | .001 | 10,000     | C-2R          |
| CM7247      | 2.5            | .100 | .100 | 10,000     | C-2R          |
| CM7248      | 2.5            | .320 | .210 | 5,000      | C-2R          |
| CM679       | 3.0            | .013 | .001 | 10,000     | C-2R          |
| CM7229      | 3.0            | .016 | .020 | 5,000      | C-2R          |
| CM7230      | 3.0            | .025 | .020 | 10,000     | C-2R          |
| CM7231      | 3.0            | .060 | .030 | 100,000    | C-2R          |
| CM7232      | 3.0            | .120 | .130 | 16,000     | C-2R          |
| CM7249      | 3.0            | .008 | .001 | 16,000     | C-2R          |
| CM682       | 5.0            | .060 | .030 | 60,000     | C-2R          |
| CM685       | 5.0            | .060 | .050 | 25,000     | C-2R          |
| CM714       | 5.0            | .075 | .090 | 25,000     | C-2R          |
| CM718       | 5.0            | .115 | .150 | 40,000     | C-2R          |
| CM6810      | 5.0            | .060 | .150 | 5,000      | C-2R          |
| CM7006      | 5.0            | .064 | .080 | 40,000     | C-2R          |
| CM7233      | 5.0            | .016 | .015 | 10,000     | C-2V          |