




PHASE NOISE (1 Hz BW, typical)

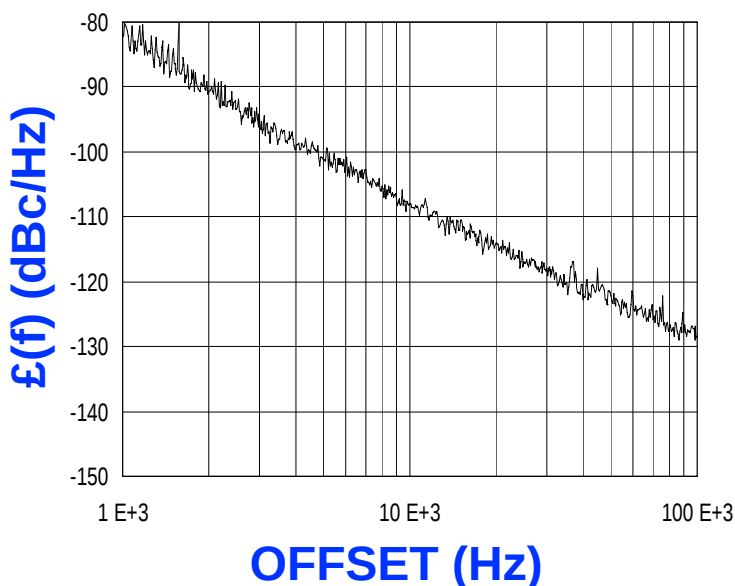

FEATURES
• Frequency Range: 1020 - 1150 MHz • Tuning Voltage: 0.5 - 4.75 Vdc • MINI-14S-L - Style Package
APPLICATIONS
• Digital Radios • Basestations • Satellite Communications


PERFORMANCE SPECIFICATIONS	VALUE	UNITS
Oscillation Frequency Range	1020 - 1150	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-107	dBc/Hz
Harmonic Suppression (2nd, typ.)	-15	dBc
Tuning Voltage	0.5 - 4.75	Vdc
Tuning Sensitivity (avg.)	40	MHz/V
Power Output	2.5±2.5	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	150	pF
Pushing	<2	MHz/V
Pulling (14dB Return Loss, Any Phase)	<2	MHz
Operating Temperature Range	-20 to 75	°C
Package Style	MINI-14S-L	

POWER SUPPLY REQUIREMENTS		
Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	20	mA


All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES
• AN-100/1 : Mounting and Grounding of VCOs • AN-102 : Proper Output Loading of VCOs • AN-107 : How to Solder Z-COMM VCOs
NOTES:

TUNING CURVE, typ.

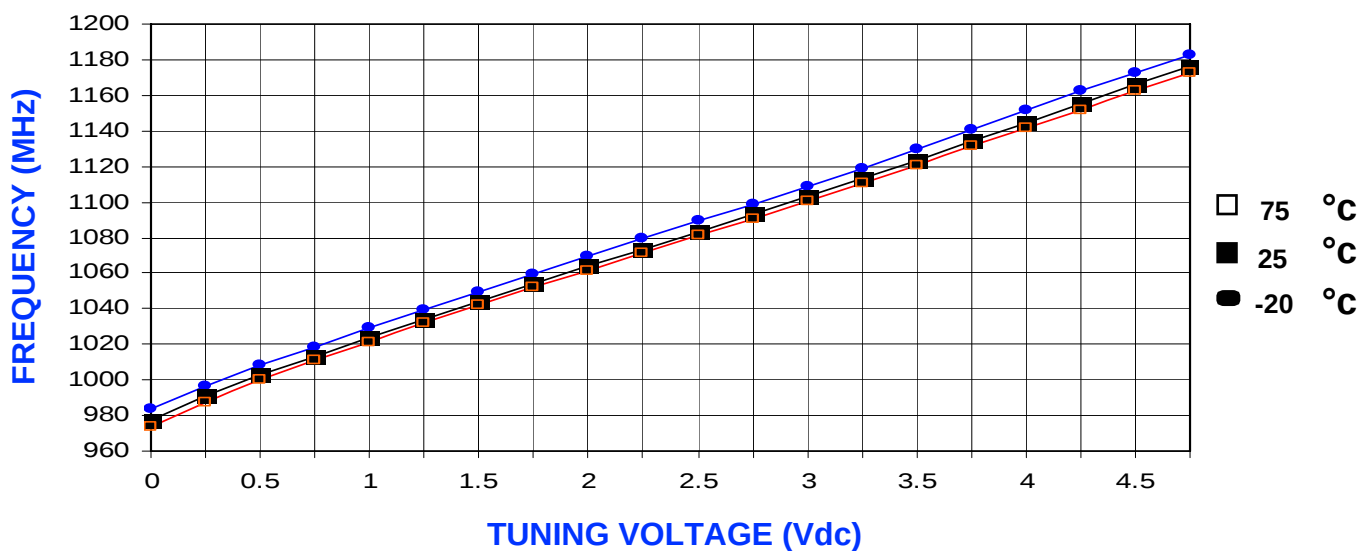

POWER CURVE, typ.

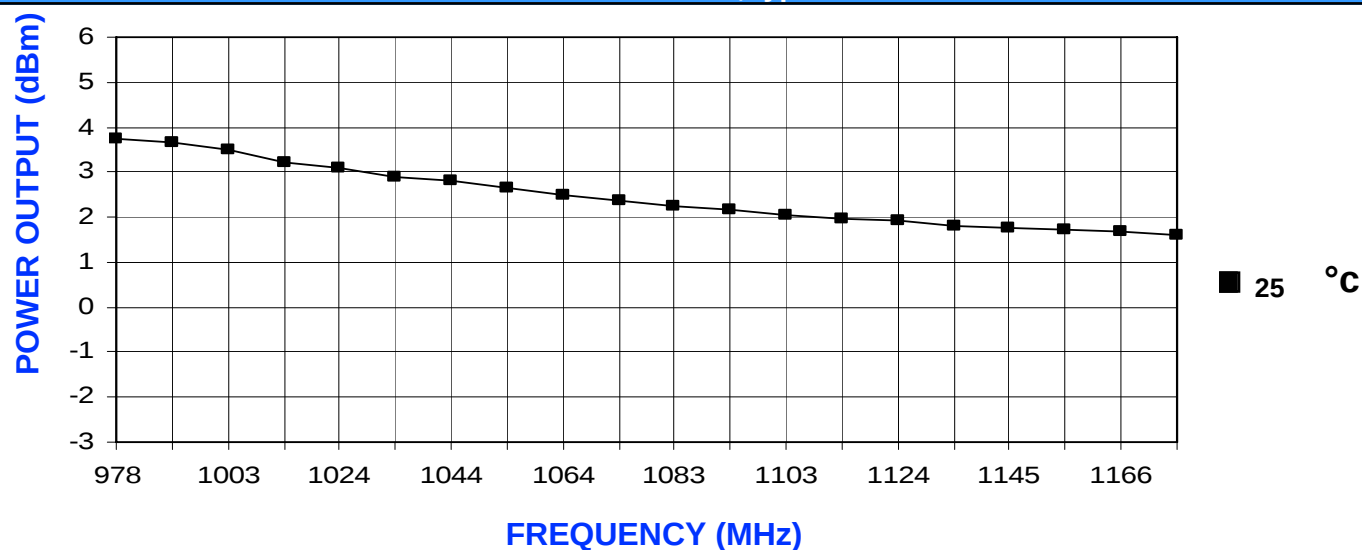

PHYSICAL DIMENSIONS

