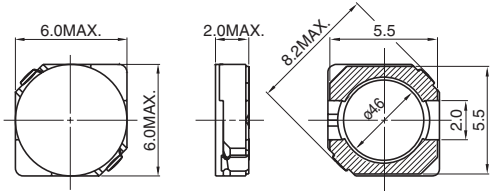
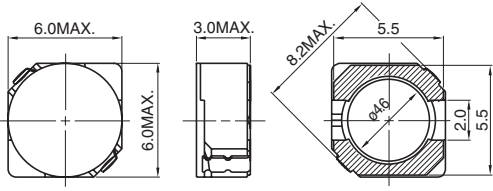
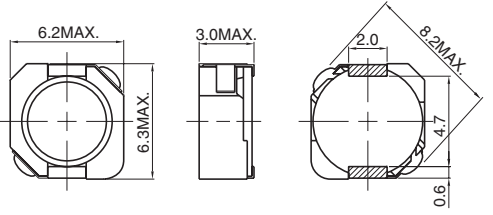
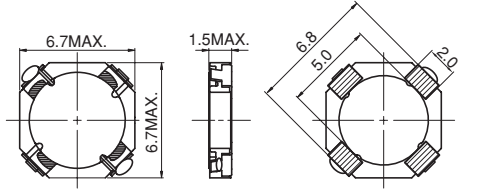
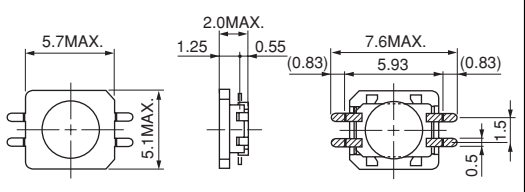
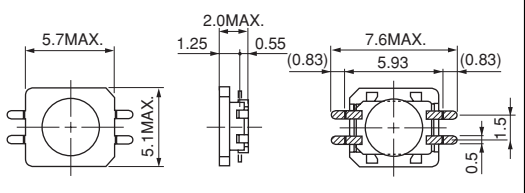
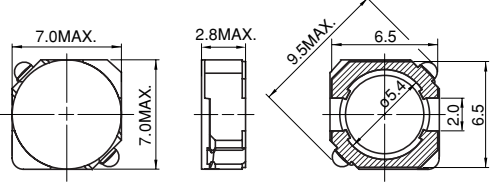
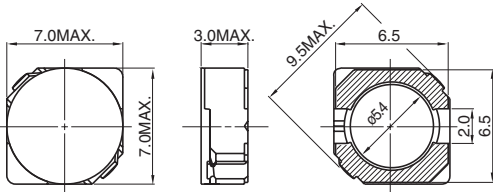


POWER INDUCTORS

TYPE 形名	DIMENSIONS (mm) 外形寸法図	CONSTRUCTION 磁気構造図	SPECIFICATIONS 仕様
CDRH5D18 			Inductance : 4.1μH – 100μH D.C.R. : 57mΩ – 1.2Ω Rated Current : 360mA – 1.95A
CDRH5D28 			Inductance : 2.5μH – 100μH D.C.R. : 18mΩ – 520mΩ Rated Current : 420mA – 2.6A
CDRH5D28R 			Inductance : 2.5μH – 100μH D.C.R. : 17.6mΩ – 520mΩ Rated Current : 400mA – 2.6A
CDRH6D12 			Inductance : 1.0μH – 68μH D.C.R. : 37.5mΩ – 920mΩ Saturation Rated Current : 450mA – 3.5A Temperature Rise Current (Typ) : 400mA – 2.8A
CLQ61 			Inductance : 2.2μH – 330μH D.C.R. : 81mΩ – 7.15Ω Rated Current : 70mA – 1.36A
CLQ61B 			Inductance : 2.2μH – 330μH D.C.R. : 81mΩ – 7.15Ω Rated Current : 70mA – 1.36A
CDRH6D26 			Inductance : 2.2μH – 100μH D.C.R. : 22mΩ – 560mΩ Rated Current : 500mA – 3.2A
CDRH6D28 			Inductance : 3.0μH – 100μH D.C.R. : 24mΩ – 535mΩ Rated Current : 540mA – 3.0A