


HDI

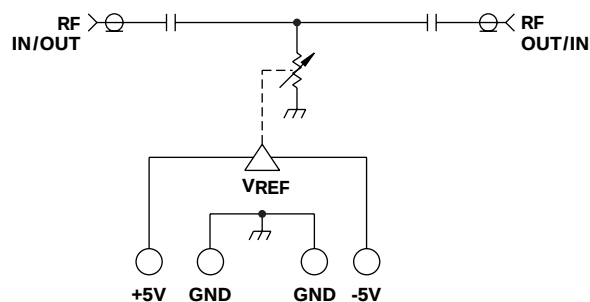

GUARANTEED PERFORMANCE

Parameter	Min	Typ	Max	Units	Conditions
Operating Frequency	.10		32	MHz	
DC Current		4 3	10 10	mA mA	At +5 VDC Supply At -5 VDC Supply
Insertion Loss		0.2	0.35	dBm	At +5 dBm
Leakage		+25	+27	dBm	At Max Power
Spike Duration			50	μSec	
Recovery			500	μSec	
VSWR		1.1/1	1.4/1		At +5 dBm
Impedance		50		OHMS	
Intercept Points	2nd 3rd	+86 +49		dBm dBm	
RF Power	Operate No Damage	+15	+20 +37	dBm dBm	1 dB Compression
Operating Temperature	-55	0	+85	°C	TA