

VI TELEFILTER**Filter Specification****TFS 140 D - 1/3****1. Measurement condition**Ambient temperature T_A :

Input power level:

Terminating impedances in f_C :**Package, pin connection and 50 Ω matching network**

(see page 2.)

23 °C

0 dBm.

for input: : 88,6 Ω | -36,16 pFfor output: 50 Ω | 0 pF,**2. Characteristics**

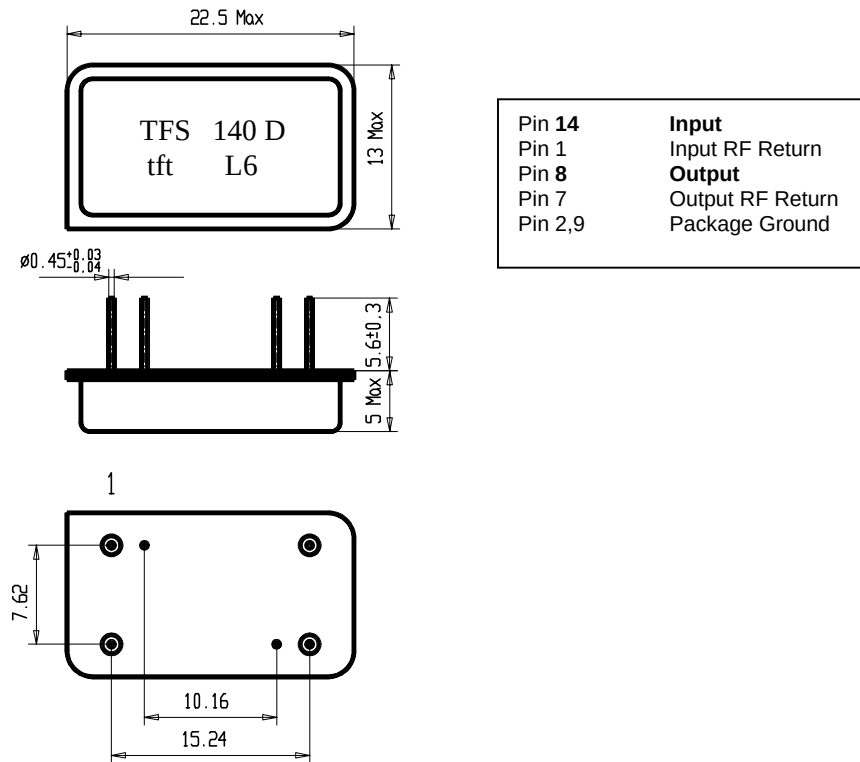
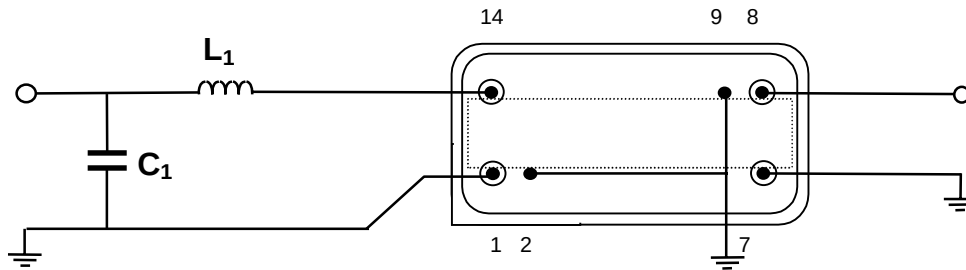
Remark:

Reference level for the relative attenuation a_{rel} of the **TFS 140 D** is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The reference frequency f_C is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e .

Data	typ. value		tolerance / limit	
Insertion loss (Reference level) a_p	22,5	dB	max. 25	dB
Centre frequency f_C at ambient temperature (f_{CAT})	140	MHz	140 $\pm$ 0,1	MHz
Pass band (-3 dB)	f_C - 3,5 MHz ... f_C + 3,5 MHz			
Bandwidth at ambient temperature:				
0,7 dB - band width	6,80	MHz		
1 dB - band width	6,97	MHz		
3 dB - band width	7,37	MHz		
20 dB - band width	8,30	MHz		
40 dB - band width	8,65	MHz		
45 dB - band width	8,72	MHz		
Amplitude ripple (p-p): f_C ... $f_C \pm 3,25$ MHz	0,5	dB	max 0,7	dB
Relative attenuation a_{rel}				
f_C	$f_C \pm 3,25$ MHz	-	max. 0,7	dB
$f_C \pm 3,25$ MHz	$f_C \pm 3,5$ MHz	-	max. 3	dB
$f_C \pm 4,6$ MHz	$f_C \pm 10$ MHz	48 dB	min 40	dB
$f_C \pm 10$ MHz	$f_C \pm 34$ MHz	55 dB	min 45	dB
f_C - 139 MHz	f_C - 89 MHz	25 dB	min 22	dB
f_C - 89 MHz	f_C - 65 MHz	35 dB	min 33	dB
f_C - 65 MHz	f_C - 50 MHz	25 dB	min 22	dB
f_C - 50 MHz	f_C - 34 MHz	35 dB	min 33	dB
f_C + 34 MHz	f_C + 55 MHz	55 dB	min 45	dB
f_C + 55 MHz	f_C + 60 MHz	45 dB	min 40	dB
f_C + 60 MHz	f_C + 260 MHz	50...70 dB	min 45	dB
Average group delay in pass band:	2,12	μ s	max. 2,5	μ s
Group delay ripple in pass band (p-p):	120	ns	max. 160	ns
Deviation from linear phase (p-p) f_C ... $f_C \pm 3,25$ ($\pm 3,5$) MHz	4° (5,8°)			
Crosstalk attenuation compared to main signal	65	dB		
Triple transit attenuation compared to main signal	44	dB		
Temperature coefficient of frequency (T_{Cr})	-18 ppm/K			
Frequency deviation of f_C over temperature	$\Delta f_C(\text{Hz}) = T_{Cr}(\text{ppm/K}) \times (T - T_A) \times f_{CAT} \text{ (MHz)}$			
Operating temperature range	- 40 °C ... + 85 °C			
Storage temperature range	- 55 °C ... + 85 °C			
Input power level	-		max. + 10	dBm

Generated:**Wadim P. Dunzow****Checked/Approved:****Dr. Bert Wall****VI TELEFILTER****Potsdamer Straße 18****D 14 513 TELTOW / Germany****Tel: (+49) 3328 4784-52 / Fax: (+49) 3328 4784-30****E-Mail: tft@telefilter.com****Vectron International, Inc.****267 Lowell Road****Hudson, NH 03051 / USA****Tel: (603) 598-0070 Fax: (603) 598-0075****E-Mail: vti@vtinh.com**

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

VI TELEFILTER**Filter Specification****TFS 140 D - 2/3****3. Package****4. 50 Ω matching network:**

VI TELEFILTER
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-52 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

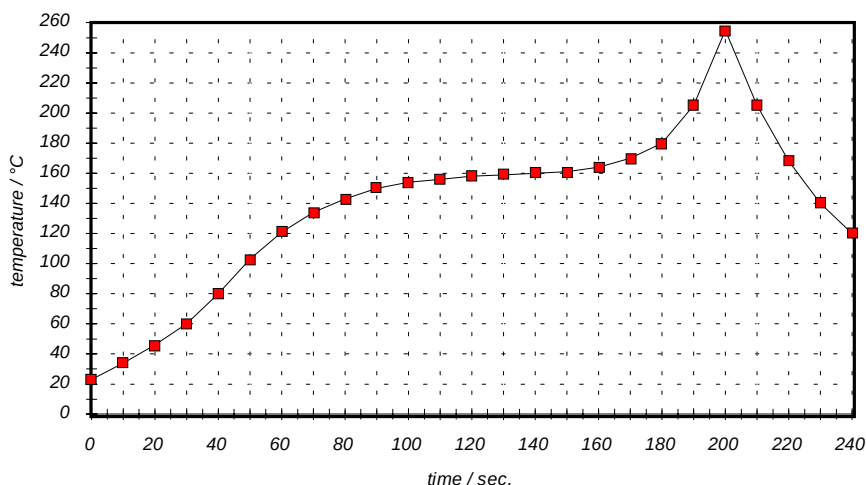
Vectron International, Inc.
 267 Lowell Road
 Hudson, NH 03051 / USA
 Tel: (603) 598-0070 Fax: (603) 598-0075
 E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

Air reflow temperature conditions

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

Chip-mount air reflow profile**Table for temperature vs. time during the air reflow process**

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

VI TELEFILTER
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-52 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

Vectron International, Inc.
267 Lowell Road
Hudson, NH 03051 / USA
Tel: (603) 598-0070 Fax: (603) 598-0075
E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information