Type: CAS113

s Product Description


- 11.55 x 3.3mm Max.(L x W),3.55mm Max. Height.
- Operating temperature: 40 ~ + 125 .
- Encapsulated core and winding for high mechanical performance.



Feature


- · LF transponder receiver antenna.
- Ideally used in Tire Pressure Monitoring System and keyless smart entry system.
- · RoHS Compliance.


Dimensions (mm)

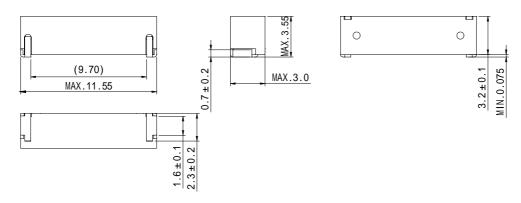

Land Pattern (mm)

Schematics(Bottom)





"S" is winding start.

Specification

	(2-1)	Measuring conditions
Inductance	7.2 m H ± 3 % Within	1 2 5 k H z 、 1 V
Unloaded Q	MIN.45	125kHz、1V
D.C.R.	55 (Ref.)	a t 25
SRF	MIN.700KHz	