


3.0A Ultra Fast Recovery Rectifier

Features

- Glass passivated chip junction
- Low forward voltage, high current capability
- Low leakage, high surge capability
- High temperature soldering guaranteed: 250°C, 0.375" (9.5mm) Lead length for 10 seconds, 5 lbs. (2.3kg) tension
- Plastic package has UL Flammability Classification 94V-0
- RoHS Compliance



DO-201AD



Mechanical Data

Case:	JEDEC DO-201AD molded plastic over passivated chip
Terminals:	Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity:	Color band denotes cathode end
Mounting Position:	Any
Weight:	1.1 grams

Maximum Ratings and Electrical Characteristics ($T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Description	UF5400	UF5401	UF5402	UF5403	UF5404	UF5405	UF5406	UF5407	UF5408	Unit	Conditions
V_{RRM}	Max. Repetitive Peak Reverse Voltage	50	100	200	300	400	500	600	800	1000	V	
V_{DC}	Max. DC Blocking Voltage	35	70	140	210	280	350	420	560	700	V	
V_{RMS}	Max. RMS Voltage	50	100	200	300	400	500	600	800	1000	V	
V_F	Max. Forward Voltage	1.0					1.7				V	IF(AV)=3.0A
IF(AV)	Max. Average Forward Rectified Current	3.0									A	TA=55°C
IFSM	Peak Forward Surge Current	150									A	TA=55°C, See note 1



3.0A Ultra Fast Recovery Rectifier

UF5400 - UF5408

Symbol	Description	UF5400	UF5401	UF5402	UF5403	UF5404	UF5405	UF5406	UF5407	UF5408	Unit	Conditions
IR	Max. Reverse Current @ VR = VRRM	10									uA	TA = 25°C
		75					200				uA	TA = 100°C
Trr	Max. Reverse Recovery Time	50					75				nS	IF = 0.5A, IR = 1.0A, Irr = 0.25A
RthJA RthJL	Typical Thermal Resistance	20									°C / W	Note 2
		8.5										
CJ	Typical Junction Capacitance	45					36				pF	VR= 4V, f=1MHz
TJ,TSTG	Operating Junction and Storage Temperature Range	-55 to +150									° C	

- Note:** 1. 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)
2. Thermal resistance from junction to lead and from to ambient with 0.375" (9.5mm) Lead length, both leads attached to heatsink.

Typical Characteristics Curves

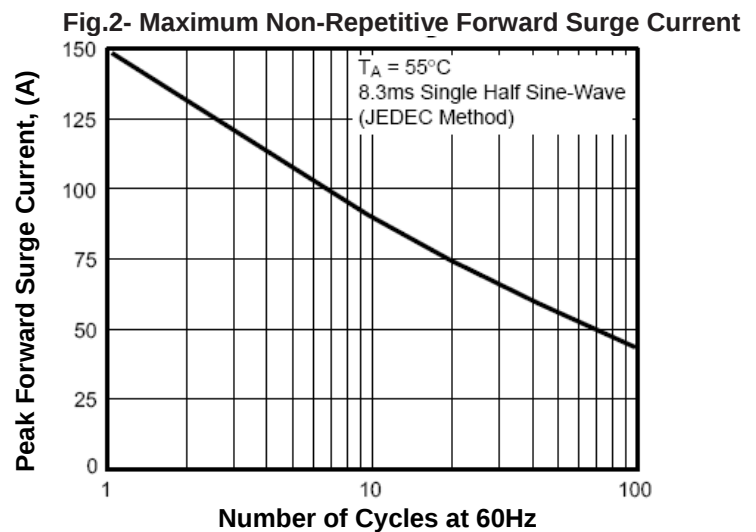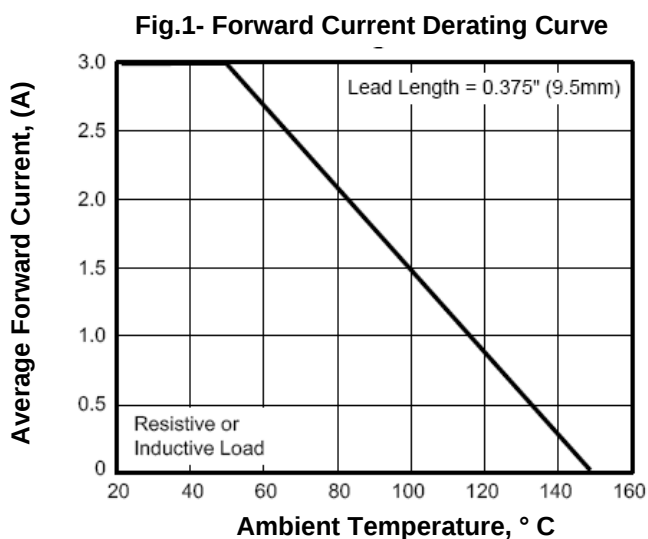

3.0A Ultra Fast Recovery Rectifier

UF5400 - UF5408

Fig.3- Typical Forward Characteristics

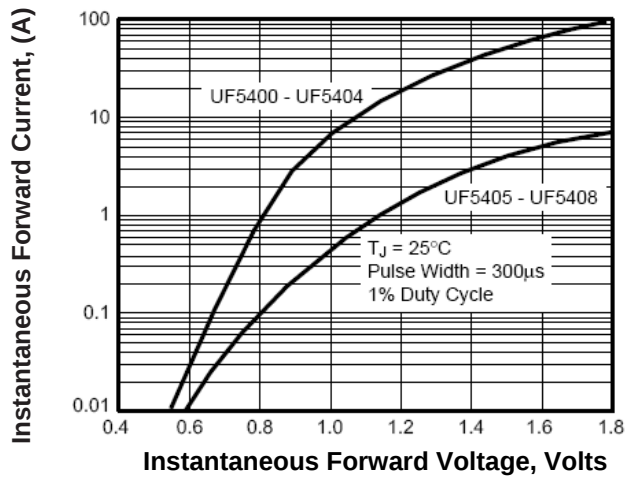


Fig.4-Typical Reverse Characteristics


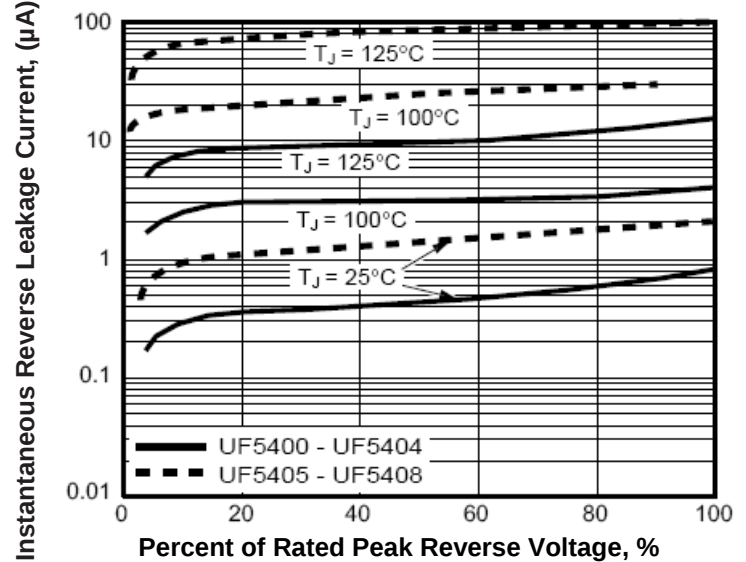



Fig.5-Typical Junction Capacitance

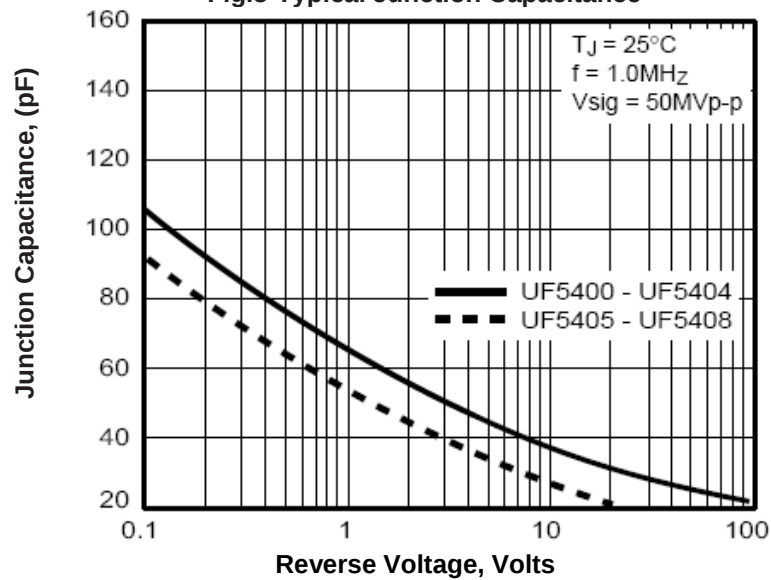

3.0A Ultra Fast Recovery Rectifier

UF5400 - UF5408

Dimensions in inches (mm)

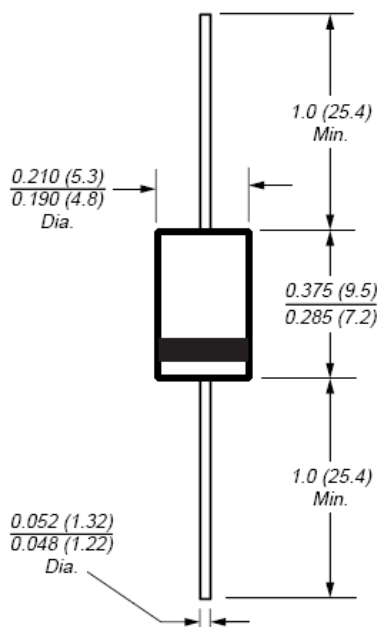

How to contact us:

DO-201AD

US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 824-8766 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.

42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

TAITRON COMPONENTS INCORPORATED REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

TAITRON COMPONENTS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

CROSS REGION PLAZA, 899 LINGLING ROAD, SUITE 18C, SHANGHAI, 200030, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931