


Typical Applications

PCS Base Stations
 Land Mobile Radio
 Cellular Telephony
 Radio in the Local Loop

Features

Wide Frequency range
 EFC Standard
 Standard Surface Mount Package
 Meets Stratum 3



Previous Corning Model Numbers

STO200

Frequency range

30 MHz – 900 MHz

Standard frequencies

67.584; 69.12; 79.488; 155.52, 242.733, 278.08 MHz

Frequency stabilities¹ [Standard TCXO]

Parameter	Min	Typ	Max.	Units	Operating temp range	Ordering Code ⁵
vs. operating temperature range (Referenced to +25°C)	-2.0		+2.0	ppm	-20 ... +70°C	D206
	-1.0		+1.0	ppm	-20 ... +70°C	D106
	-1.0		+1.0	ppm	0 ... +50°C	B106
	-0.5		+0.5	ppm	0 ... +50°C	B507
Parameter	Min	Typ	Max.	Units	Condition	
Initial tolerance	- 1.0		+1.0	ppm	at time of shipment, nominal EFC V _S ± 5% Load ± 10%	
vs. supply voltage change	- 0.2		+0.2	ppm		
vs. load change	- 0.2		+0.2	ppm		
vs aging /1. Year	- 1.0		+1.0	ppm		

Frequency stabilities¹ [Stratum 3 TCXO]

Parameter	Min	Typ	Max.	Units	Operating temp range	Ordering Code ⁵
vs. operating temperature range (Referenced to +25°C)	-0.8		+0.8	ppm	-40 ... +85°C	F807
	-0.28		+0.28	ppm	-30 ... +85°C	G287
	-0.8		+0.8	ppm	-20 ... +70°C	D807
	-0.28		+0.28	ppm	-20 ... +70°C	D287
	-0.28		+0.28	ppm	0 ... +50°C	B287
Parameter	Min	Typ	Max.	Units	Condition	
Initial tolerance	- 1.0		+1.0	ppm	at time of shipment, nominal EFC	
vs. supply voltage change	- 0.2		+0.2	ppm	V _S ± 5%	
vs. load change	- 0.1		+0.1	ppm	Load ± 10%	
vs aging /15 Years	- 2.5		+2.5	ppm		
overall tolerance	-4.6		-4.6	ppm		
(*Stratum 3 per GR-1244-CORE: <±4.6 ppm for all causes and 20 years aging, Holdover: <±0.37 ppm over 24 hours (Code: D287 & B287))						

Supply voltage (Vs)

Parameter	Min	Typ	Max.	Units	Condition	Ordering Code ⁵
Supply voltage [Standard]	3.135	3.3	3.465	VDC		SV033
Current consumption			50	mA	steady state @ +25°C & 3.3VDC & CMOS	
			90	mA	steady state @ +25°C & 3.3VDC & PECL	

RF output

Parameter	Min	Typ	Max.	Units	Condition	Ordering Code ⁵
Signal [Standard]	HCMOS					RFH
Load	13.5	16.5		pF	with Vs=3.3V and 15pF load with Vs=3.3V and 15pF load @ (Voh-Vol)/2	
Signal Level (Vol)			0.3	VDC		
Signal Level (Voh)	3.0			VDC		
Rise and Fall time			5	ns		
Duty cycle	40	50	60	%		
Subharmonics	-45			dBc		
Signal [Standard]	PECL					RFP
Load		50		Ω	to Vs-2V 20 to 80%	
Rise and Fall time			1	ns		
Duty cycle	45	50	55	%		
Subharmonics	-45			dBc		

Frequency Tuning (EFC)

Parameter	Min	Typ	Max.	Units	Condition
Tuning Range	± 8.0	±14.0	± 20.0	ppm	Standard Version
Tuning Range	± 5.0	±12.0	± 20.0	ppm	Stratum 3 Version
Linearity			10	%	
Tuning Slope	Positive				
Control Voltage Range	0.3	1.65	3.0	VDC	with Vs=3.3VDC
Freq. control input impedance	10			kΩ	

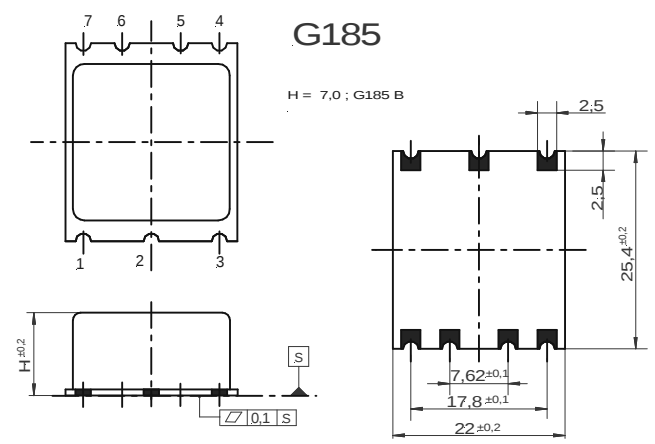
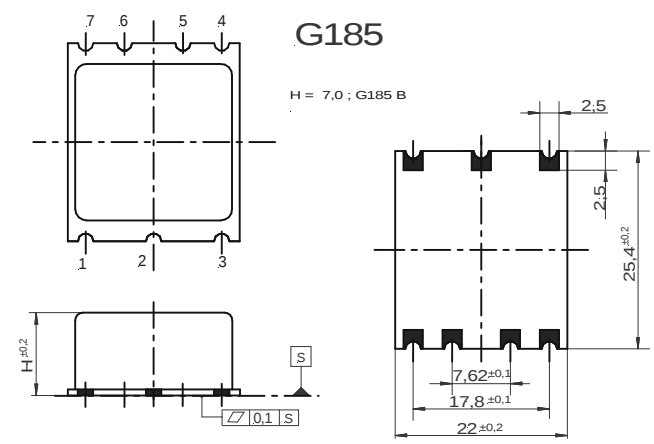
Additional parameters

Parameter	Min	Typ	Max.	Units	Condition
Phase Noise ³		-70		dBc/Hz	10 Hz Standard TCXO @ 79.483 MHz
		-100		dBc/Hz	
		-120		dBc/Hz	
		-128		dBc/Hz	
		-135		dBc/Hz	
Phase Noise ³		-60		dBc/Hz	10 Hz Stratum3 TCXO @ 155.52MHz
		-96		dBc/Hz	
		-115		dBc/Hz	
		-122		dBc/Hz	
		-129		dBc/Hz	
Weight			9	g	
Processing & Packing	Handling & processing note				

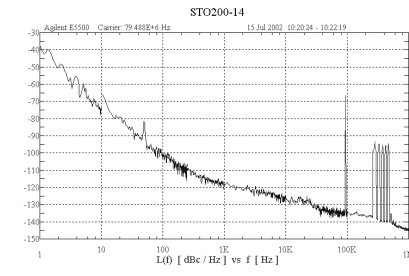
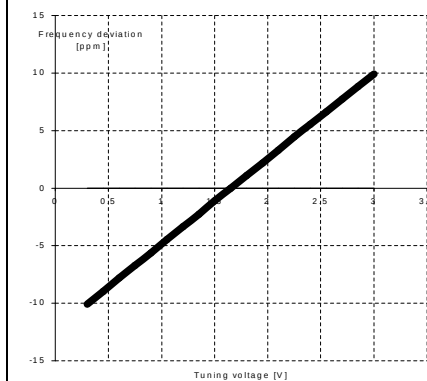
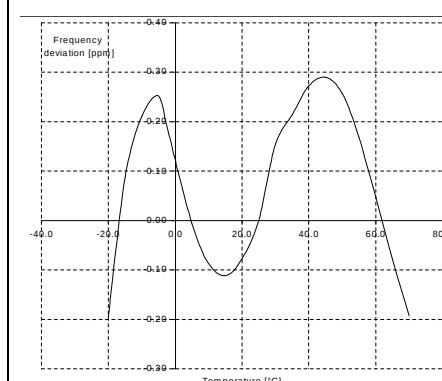
Absolute Maximum Ratings

Parameter	Min	Typ	Max.	Units	Condition
Supply voltage (Vs)			6.0	V	
Control voltage	0		Vs	V	
Maximum output load @ CMOS			40	pF	
Operable temperature range	-40		+85	°C	
Storage temperature range	-55		+125	°C	

Enclosures

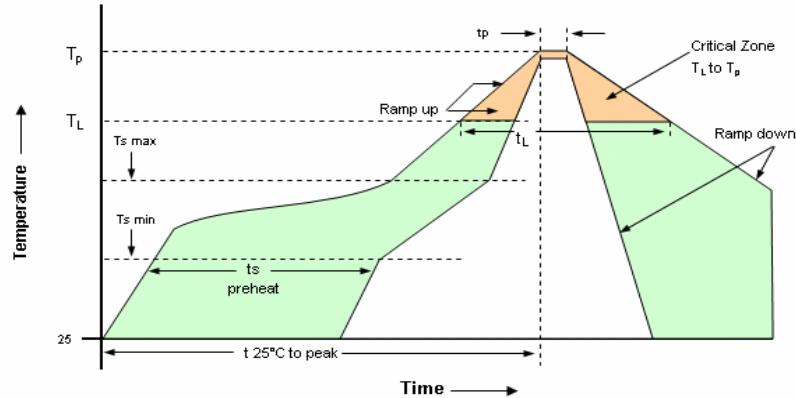
Type G185B				Type G185B (PECL)			
Package Codes :				Package Codes :			
Code A1	Height "H" 7.0	Pin Length "L" NA		Code B1	Height "H" 7.0	Pin Length "L" NA	
 Dimensions : mm				 Dimensions : mm			
Pin Connections 1 Voltage Control 2 I.C 3 Vs (supply voltage) 4 RF-Output 5 I.C. 6 I.C. 7 GND				Pin Connections 1 Vs (supply voltage) 2 I.C 3 GND 4 I.C. 5 RF-Output 6 RF-Output compl. 7 GND			

Typical measurement data

Phase Noise and Jitter C2530A1 @79.488 MHz	Tuning Slope C2530A1 @79.488 MHz	Frequency stability vs temp C2530A1 @79.483 MHz									
 STO2000-14 15 Jul 2002 10:20:24 - 10:22:19 <table border="1"> <thead> <tr> <th>Frequency range [Hz]</th> <th>Sφ(f) [dB]</th> <th>Jitter [ps rms]</th> </tr> </thead> <tbody> <tr> <td>100 Hz to 1.5 MHz</td> <td>-61,86</td> <td>1.616 ps</td> </tr> <tr> <td>50 kHz to 1.5MHz</td> <td>-62,07</td> <td>1.578 ps</td> </tr> </tbody> </table>	Frequency range [Hz]	Sφ(f) [dB]	Jitter [ps rms]	100 Hz to 1.5 MHz	-61,86	1.616 ps	50 kHz to 1.5MHz	-62,07	1.578 ps	 Frequency deviation [ppm] Tuning voltage [V]	 Frequency deviation [ppm] Temperature [°C]
Frequency range [Hz]	Sφ(f) [dB]	Jitter [ps rms]									
100 Hz to 1.5 MHz	-61,86	1.616 ps									
50 kHz to 1.5MHz	-62,07	1.578 ps									

Recommended Reflow Profile

Solderprofile:



Profile Feature	Pb-Free Assembly /Sn-Pb Assembly	Profile Feature	Pb-Free Assembly /Sn-Pb Assembly
Average ramp-up rate (T_L to T_p)	3°C/second max.	Time 25°C to Peak Temperature	8 minutes max.
Preheat -Temperature Min T_{smin} -Temperature Min T_{smax} -Time (min to max) (t_s)	150°C 200°C 60-180 seconds	Time maintained above - Temperature (T_L) - Time (t_L)	217°C 60-150 seconds
T_{smax} to T_L - Ramp-up Rate	3°C/second max.		
Time maintained above - Temperature (T_L) - Time (t_L)	217°C 60-150 seconds	Time within 5°C of actual Peak Temperature (t_p)	20-40 seconds
Peak Temperature (T_p)	max 260°C	Ramp-down Rate	6°C/second max.

Note: All temperatures refer to topside of the package, measured on the package body surface.

How to Order this Product:

Step 1	Use this worksheet to forward the following information to your factory representative:				
Model	Stability Code	Supply Voltage Code	RF Output Code	Package Code	Frequency
C2530					

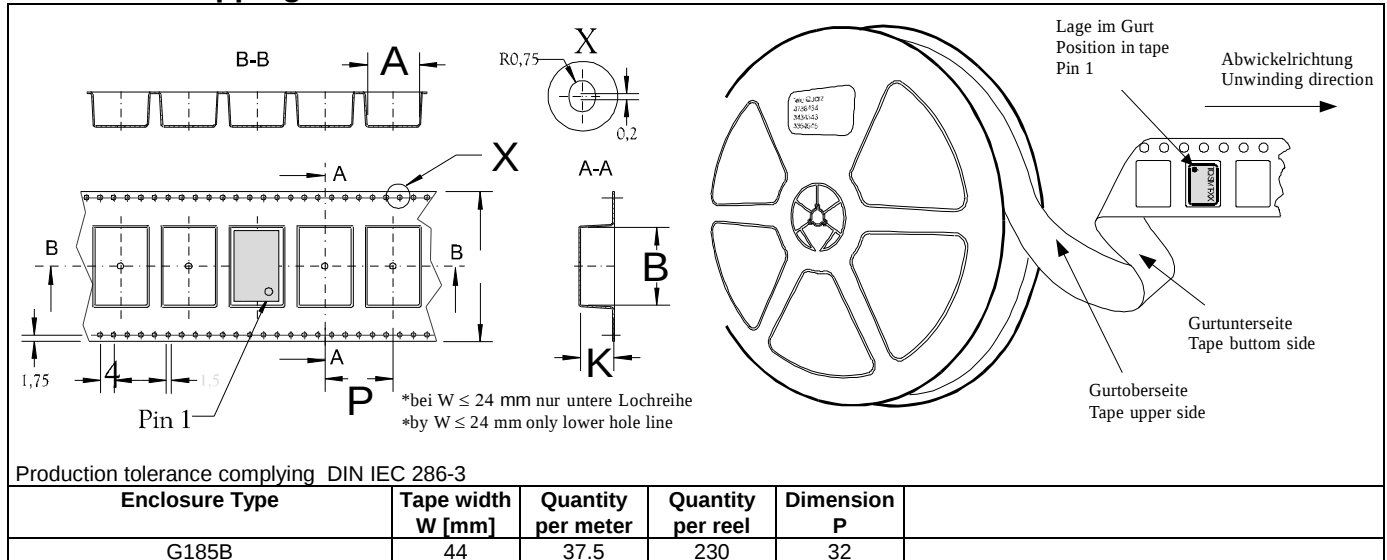
Example: C2530 D206 SV033 RFC A1 12.800MHz

Step 2	The factory representative will then respond with a Corning Model Number in the following Configuration:		
Model	Package Code	Dash	Dash Number
C2530	[Customer Specified Package Code]	-	[Factory Generated 4 digit number]

Typical P/N = C2530A1-0001

Marking
C2530A1-xxxx Frequency * C AYYWW

Standard Shipping Method



Notes:

- 1 Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
- 2 Unless otherwise stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C)
- 3 Phase noise degrades with increasing output frequency.
- 4 Subject to technical modification.
- 5 Contact factory for availability.