

TM


series

Timer Circuit Use



Low Leakage Current
Anti-Solvent Feature


- Ideally suited for timer circuits.
- Excellent leakage current stability, even subjected to load or no load at high temperature for a long time.
- Adapted to the RoHS directive (2002/95/EC).

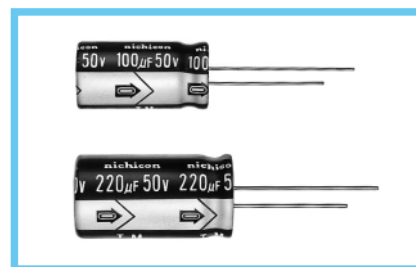

Specifications

Item	Performance Characteristics								
Category Temperature Range	-40 ~ +85°C								
Rated Voltage Range	10 ~ 50V								
Rated Capacitance Range	1 ~ 470μF								
Capacitance Tolerance	± 20% (M) (±10% (K) semi-standard) at 120Hz, 20°C								
Leakage Current	After 2 minutes' application of rated voltage, leakage current is 0.001CV+1 (μA) or less.								
tan δ	Measurement frequency : 120Hz, Temperature : 20°C								
	Rated voltage (V)	10	16	25	50				
	tan δ (MAX.)	0.17	0.13	0.10	0.08				
Stability at Low Temperature	Measurement frequency : 120Hz								
	Rated voltage (V)		10	16	25	50			
	Impedance ratio	Z-25°C / Z+20°C	2	2	1.5	1.5			
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	4	3	2	2			
Endurance	After 2000 hours' application of rated voltage at 85°C, capacitors meet the characteristics requirements listed at right.								
						Capacitance change		Within ±10% of initial value	
						tan δ		150% or less of initial specified value	
	Leakage current		Initial specified value or less						
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours, and after performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they will meet the specified value for endurance characteristics listed above.								
Marking	Printed with white color letter on black sleeve.								

Radial Lead Type

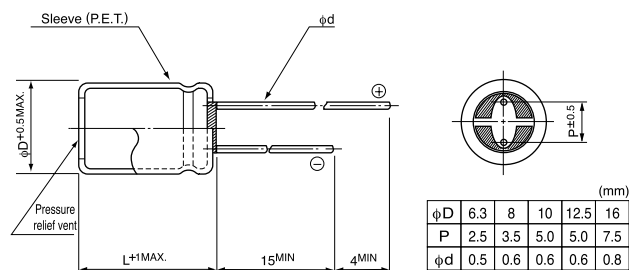


• Please refer to page 21 about the end seal configuration.

Dimensions

		φD × L (mm)			
Cap. (μF)	V	10	16	25	50
Code		1A	1C	1E	1H
1	010				6.3 × 11
2.2	2R2				6.3 × 11
3.3	3R3			6.3 × 11	6.3 × 11
4.7	4R7			6.3 × 11	8 × 11.5
10	100		6.3 × 11	8 × 11.5	10 × 12.5
22	220	6.3 × 11	8 × 11.5	10 × 12.5	10 × 16
33	330	8 × 11.5	10 × 12.5	10 × 16	10 × 20
47	470	8 × 11.5	10 × 12.5	10 × 16	12.5 × 20
100	101	10 × 16	10 × 20	12.5 × 20	12.5 × 25
220	221	10 × 20	12.5 × 25	16 × 25	16 × 31.5
330	331	12.5 × 25	16 × 25	16 × 25	
470	471	12.5 × 25	16 × 25	16 × 31.5	

Type numbering system (Example : 10V 33μF)

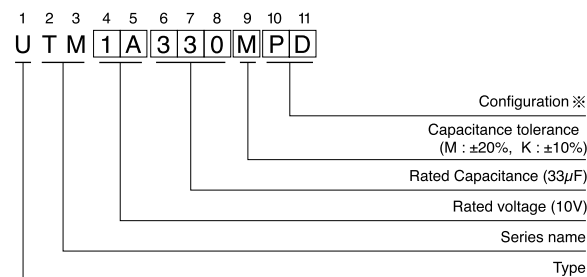

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
6.3	ED
8 · 10	PD
12.5 · 16	HD

Please refer to page 21, 22, 23 about the formed or taped product spec.
Please refer to page 3 for the minimum order quantity.