

ZT series

4.5mmL Chip Type, Wide Temperature Range




For SMD



Smaller


- Chip type with 4.5mm height, operating over wide temperature range of $-40 \sim +105^{\circ}\text{C}$.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine using carrier tape.
- Adapted to the RoHS directive (2002/95/EC).




Specifications

Item	Performance Characteristics							
Category Temperature Range	-40 ~ +105°C							
Rated Voltage Range	6.3 ~ 50V							
Rated Capacitance Range	0.1 ~ 100μF							
Capacitance Tolerance	±20% at 120Hz, 20°C							
Leakage Current	After 2 minutes' application of rated voltage, leakage current is not more than 0.01CV or 3 (μA) , whichever is greater.							
tan δ	Measurement frequency : 120Hz, Temperature : 20°C							
	Rated voltage (V)	6.3	10	16	25	35	50	
	tan δ (MAX.)	0.38	0.32	0.20	0.16	0.14	0.14	
Stability at Low Temperature	Measurement frequency : 120Hz							
	Rated voltage (V)		6.3	10	16	25	35	50
	Impedance ratio	Z-25°C / Z+20°C	6	5	3	3	3	3
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	10	10	6	6	4	4
Endurance	After 1000 hours' application of rated voltage at 105°C, capacitors meet the characteristic requirements listed at right.			Capacitance change		Within ±25% of initial value (16V or less)		
						Within ±20% of initial value (25V or more)		
				tan δ		300% or less of initial specified value		
				Leakage current		Initial specified value or less		
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours, and after performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they will meet the specified value for endurance characteristics listed above.							
Resistance to soldering heat	The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the characteristic requirements listed at right.				Capacitance change		Within ±10% of initial value	
					tan δ		Initial specified value or less	
					Leakage current		Initial specified value or less	
Marking	Black print on the case top.							

Chip Type

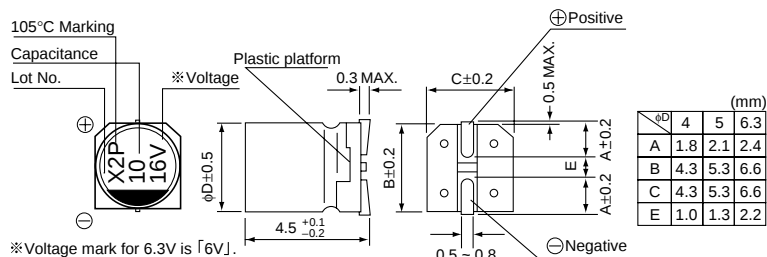

Type numbering system (Example : 16V 10 μF)

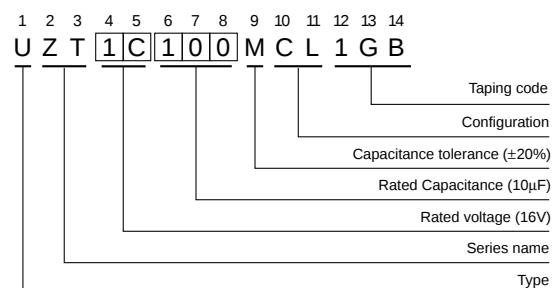

Dimensions

V	6.3	10	16	25	35	50
Cap. (μF)	0J	1A	1C	1E	1V	1H
0.1	0R1					4 0.9
0.22	R22					4 2.2
0.33	R33					4 2.8
0.47	R47					4 3.3
1	010					4 5.4
2.2	2R2					4 9.6
3.3	3R3					4 12
4.7	4R7			4 11	4 13	5 16
10	100		4 16	5 20	5 22	6.3 26
22	220	4 19	5 24	5 26	6.3 33	6.3 36
33	330	5 26	5 30	6.3 35	6.3 42	
47	470	5 32	6.3 40	6.3 44		
100	101	6.3 52				

Rated Ripple (mArms) at 105°C 120Hz

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz~
Coefficient	0.70	1.00	1.17	1.36	1.50

- Taping specifications are given in page 24.
- Recommended land size, soldering by reflow are given in page 25, 26.
- Please select UX(p.74), UJ(p.76) series if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.