
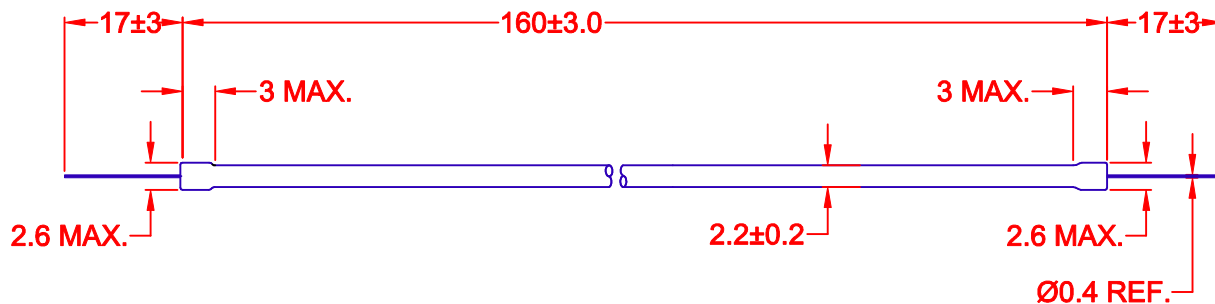


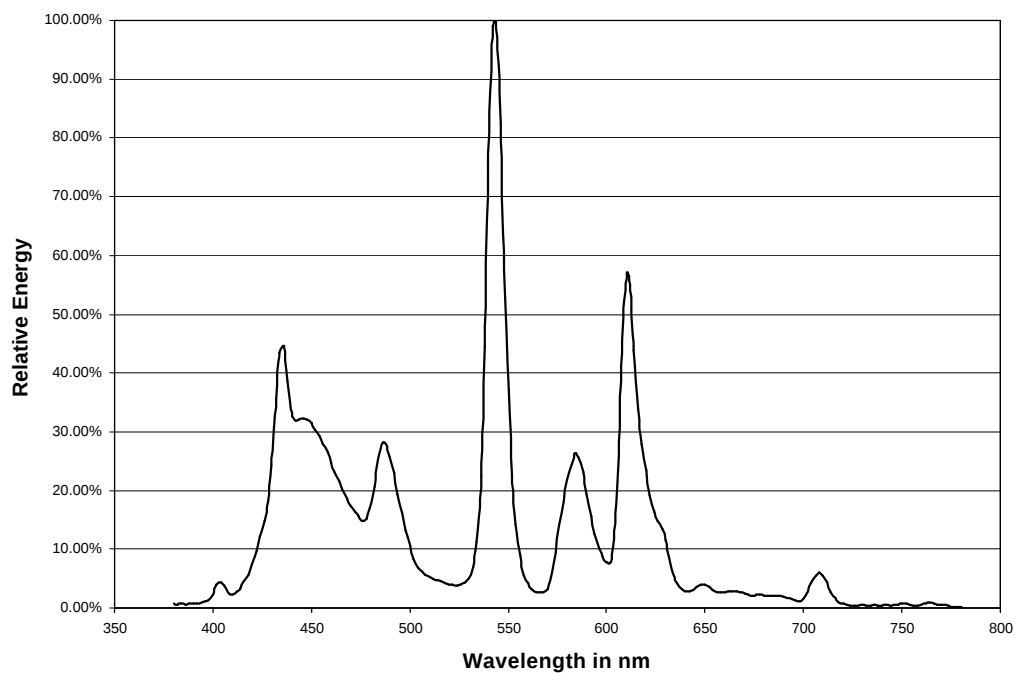

JKL PART NUMBER	COLOR	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mAmps)	BRIGHTNESS (CANDELA/m ²)	*RATED LIFE (HRS)
BF22160-24B	LCD HIGH OUTPUT WHITE 8400°k RGB	800 @ 0°C	370	5 ± 1	38,000 ±10%	20,000

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OF THE INITIAL RATING.

			METRIC THIRD ANGLE PROJECTION	DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.2 2 PL +/- 0 ANGLE +/- 0	JKL COMPONENTS CORPORATION					
					TITLE MINIATURE COLD CATHODE FLUORESCENT LAMP					
B	DIM LINE CORRECT. AND 160+/-5.0 TO 160+/-3.0	3/14/00	DRAWN BY	APPVD BY	DATE	SIZE	FSCM NO.	DRAWING NO.		
A	LEAD LENGTH TO 17±3	3/14/00	L. WENGSTROM	FD	10/17/00	A	55335	BF22160-24B		
	RELEASED	2/29/00				SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
REV. NO.	DESCRIPTION/ECO NUMBER	APPVD DATE	- CAD DRAWING -			NONE	2/29/00	10/17/00	B	1 OF 1
			MANUAL REVISIONS NOT PERMITTED							