

isc Silicon NPN Power Transistor

TIP35D

DESCRIPTION

- DC Current Gain-
: $h_{FE} = 25(\text{Min}) @ I_C = 1.5\text{A}$
- Collector-Emitter Sustaining Voltage-
: $V_{CEO(\text{SUS})} = 120\text{V}(\text{Min})$
- Complement to Type TIP36D
- Current Gain-Bandwidth Product-
: $f_T = 3.0\text{MHz}(\text{Min}) @ I_C = 1.0\text{A}$

APPLICATIONS



- Designed for use in general purpose power amplifier and switching applications.

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	160	V
V_{CEO}	Collector-Emitter Voltage	120	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current -Continuous	25	A
I_{CM}	Collector Current-peak	40	A
I_B	Base Current	5	A
P_C	Collector Power Dissipation@ $T_C = 25^\circ\text{C}$	125	W
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-65~150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	1.0	$^\circ\text{C/W}$

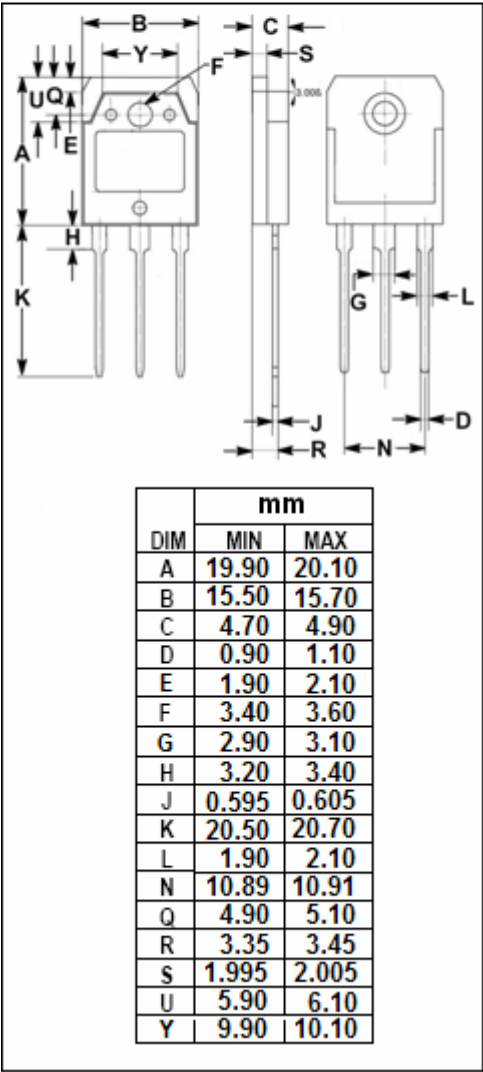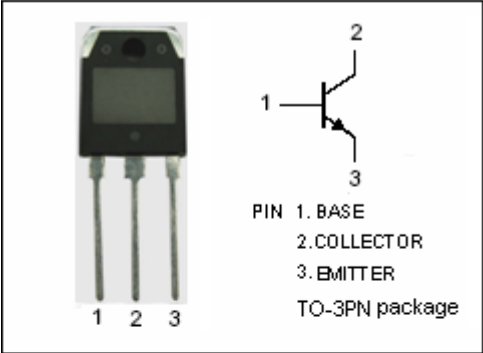

isc Silicon NPN Power Transistor

TIP35D

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C=30\text{mA}; I_B=0$	120		V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C=15\text{A}; I_B=3\text{A}$		2.5	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C=25\text{A}; I_B=6.25\text{A}$		5.0	V
$V_{BE(on)-1}$	Base-Emitter On Voltage	$I_C=15\text{A}; V_{CE}=4\text{V}$		2.0	V
$V_{BE(on)-2}$	Base-Emitter On Voltage	$I_C=25\text{A}; V_{CE}=4\text{V}$		4.0	V
I_{CEO}	Collector Cutoff Current	$V_{CE}=90\text{V}; I_B=0$		1.0	mA
I_{CES}	Collector Cutoff Current	$V_{CE}=160\text{V}; V_{BE}=0$		0.7	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=5\text{V}; I_C=0$		1.0	mA
h_{FE-1}	DC Current Gain	$I_C=1.5\text{A}; V_{CE}=4\text{V}$	25		
h_{FE-2}	DC Current Gain	$I_C=15\text{A}; V_{CE}=4\text{V}$	8		
f_T	Current-Gain—Bandwidth Product	$I_C=1\text{A}; V_{CE}=10\text{V}; f_{test}=1.0\text{MHz}$	3		MHz

Switching Times

t_{on}	Turn-On Time	$I_C=15\text{A}; I_{B1}=-I_{B2}=1.5\text{A};$ $V_{BE(off)}=4.15\text{V}; R_L=2\Omega$		1.2	μS
t_{off}	Turn-Off Time			0.9	μS