

C&K V Series

Power & Line Voltage Select Slide Switches

Features/Benefits

- Ratings up to 10 AMPS
- Snap-in panel and PC mounting
- Actuators with screwdriver slot
- Quick connect terminals available
- RoHS compliant

Typical Applications

- Appliances



Models Available

Specifications

CONTACT RATING: 10.1 AMPS @ 125 V AC; 4 AMPS @ 28 V DC;
5 AMPS @ 250 V AC (UL/CSA). 2.0 (0.5) AMPS @ 250 V AC,
T85 (VDE).

ELECTRICAL LIFE: 10,000 make-and-break cycles at full load.

CONTACT RESISTANCE: Below 10 m Ω typ. initial
@ 2-4 V DC, 100 mA.

INSULATION RESISTANCE: 10⁹ Ω min.

DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.

OPERATING TEMPERATURE: -30°C to +85°C.

NOTE: Any models supplied with Q, B or G contact material are RoHS compliant.
For the latest information regarding RoHS compliance, please go to:
www.ittcannon.com/rohs.

NOTE: Specifications and materials listed above are for switches with standard options.
For information on specific and custom switches, consult Customer Service Center.

Materials

HOUSING: 6/6 nylon (UL94V-2), black.

TOP PLATE: 6/6 nylon (UL94V-2), black.

ACTUATOR: Glass filled polyester (UL94V-0), '01 and 02' styles,
black (standard); '12, 13 and 14' styles, red (standard).

CONTACTS: Copper, silver plated.

TERMINALS: Copper, silver plated.

CONTACT SPRING: Music wire or stainless steel.

TERMINAL SEAL: Epoxy.

Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages J-33 through J-35. For additional options not shown in catalog, consult Customer Service Center.

	☐	☐	☐	☐	☐	☐
Switch Function						
V802 DPDT						
V701 SPST						
V702 SPDT						
V801 DPST						
Actuator						
12 Screwdriver slot						
01 .290" high						
02 .290" high with markings						
13 Screwdriver slot						
14 Screwdriver slot with markings						
Mounting Style						
SS Panel with mounting ears						
MA Right angle, PC thru-hole						
MS PC Thru-hole						
S2 Snap-in panel						
SL Right angle, panel with mounting ears						
Terminations						
05 Quick connect						
02 PC thru-hole						
08 Right angle PC thru-hole						
Contact Material						
Q Silver						
Seal						
NONE No seal						
E Epoxy seal						

C&K V Series Power & Line Voltage Select Slide Switches

SWITCH FUNCTION


NO. POLES	MODEL NO.	SWITCH FUNCTION	SCHEMATIC	AVAILABLE MOUNTING STYLES
SP	V701	SPST	1A 1	ALL
	V702	SPDT	1A 1 1B	ALL

All models    with all options.
Contacts make on side actuator thrown.

NO. POLES	MODEL NO.	SWITCH FUNCTION	SCHEMATIC	AVAILABLE MOUNTING STYLES
DP	V801	DPST	1A 1 2A 2	ALL
	V802	DPDT	1A 1 1B 2A 2 2B	ALL


ACTUATOR

12 SCREWDRIVER SLOT
WITH MARKING




Actuator color is red with white 115V-230V markings (std.).

01 .290" HIGH




Actuator color is black.

02 .290" HIGH
WITH MARKINGS




markings are reversed on V702 and V802 models. Actuator color is black with white markings (std.).

13 SCREWDRIVER SLOT
NO MARKING




Actuator color is red.

14 SCREWDRIVER SLOT
WITH MARKINGS



Markings are reversed on V702 and V802 models. Actuator color is red with white markings (std.).




Note: Orientation of actuator markings and terminals.

MOUNTING STYLE


SS PANEL WITH MOUNTING EARS



V80212SS05Q
DPDT

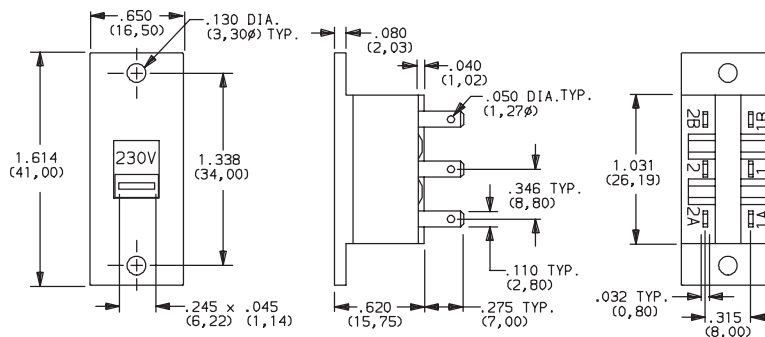

PANEL MOUNTING




AVAILABLE WITH:
Models: All.
Terminations: 02 and 05

MA RIGHT ANGLE, PC THRU-HOLE



V80212MA08Q
Horizontal Actuation
DPDT

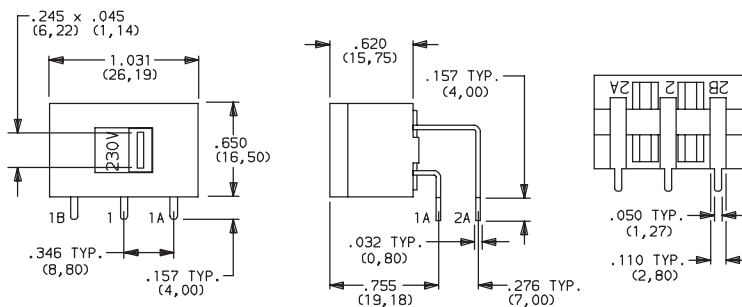

AVAILABLE WITH:

Models: All
Terminations: 08

PC MOUNTING

PC mount, side actuated.
For mounting information,
see TERMINATIONS section, page J-35.




Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change

C&K V Series Power & Line Voltage Select Slide Switches

MOUNTING STYLE

MS PC THRU-HOLE

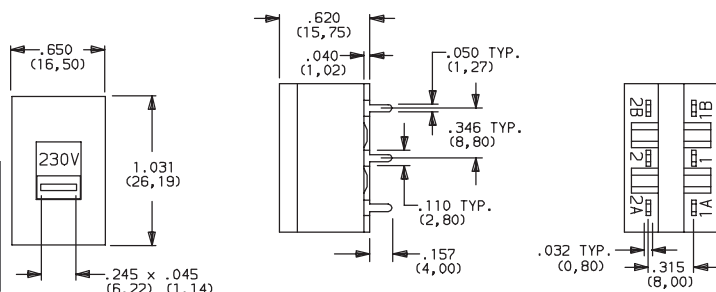

AVAILABLE WITH:

All models with 02 terminations

PC MOUNTING


PC mount, top actuated.
For mounting information,
see TERMINATIONS section, page J-35.



V80212MS02Q

DPDT

SL RIGHT ANGLE PANEL WITH MOUNTING EARS

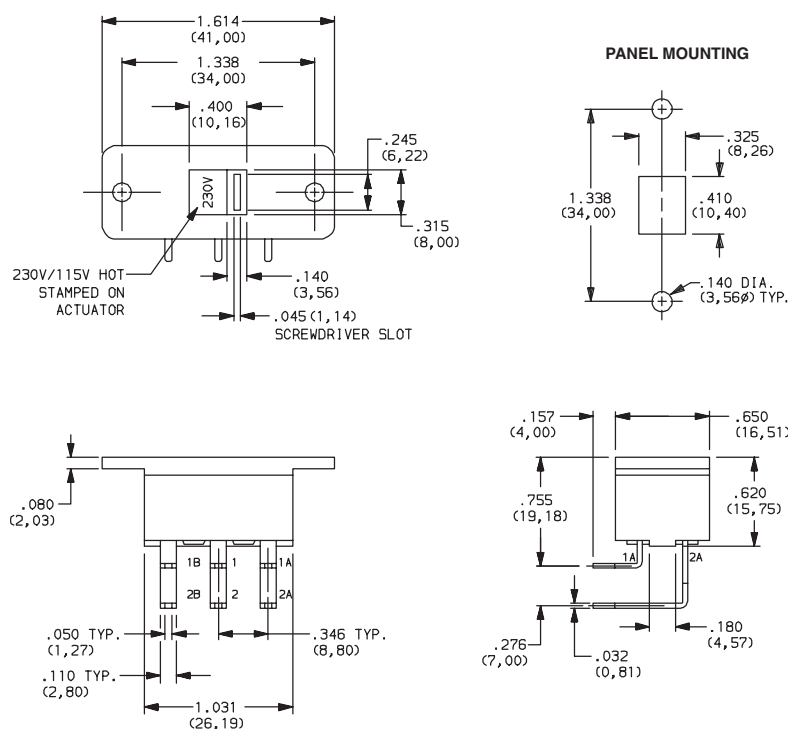

AVAILABLE WITH:


All models with 08 terminations




V80213SL08Q
Horizontal Actuation

DPDT

S2 SNAP-IN PANEL MOUNT

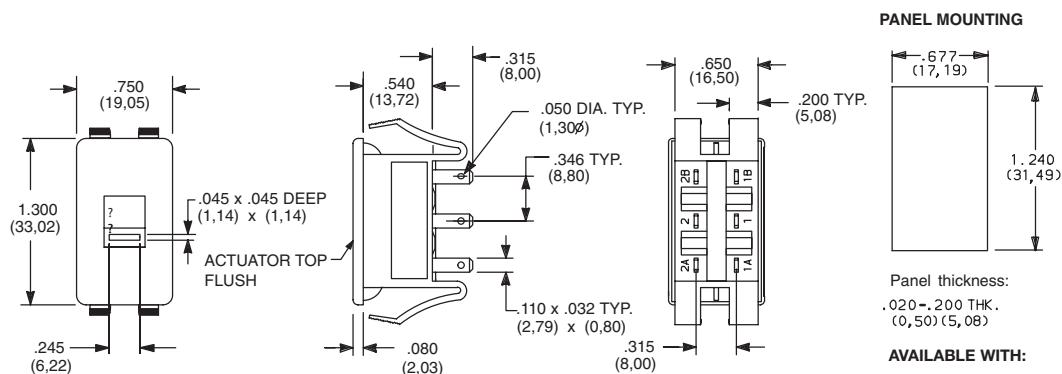

PANEL MOUNTING



Panel thickness:

.020-.200 THK.
(0,50) (5,08)

AVAILABLE WITH:

All models with 02 &
05 terminations



V80212S205Q

DPDT




Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change


C&K V Series Power & Line Voltage Select Slide Switches

TERMINATIONS


05 QUICK CONNECT



02 PC THRU-HOLE




PC MOUNTING




MSt SS Mounting Styles

08 PC THRU-HOLE

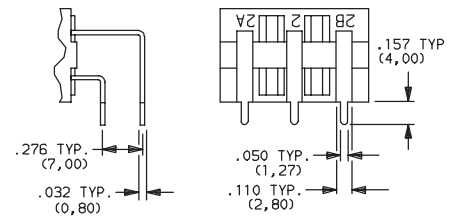

Not available with 'MS, SS or S2' mounting styles.

PC MOUNTING



Mat SL Mounting Styles

CONTACT MATERIAL

OPTION CODE	RoHS COMPLIANT	RoHS COMPLIANT	CONTACT MATERIAL	RATINGS	
Q	YES	YES	SILVER ¹	POWER	10.1 AMPS @ 125 V AC; 4 AMPS @ 28 V DC; 5 AMPS @ 250 V AC (UL/CSA); 2.0 (0.5) AMPS @ 250 V AC, T85 (VDE).

* Note: See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.

¹ CONTACTS & TERMINALS: Copper, silver plated (standard with all termination options).



All models with all options. V70X and V80X models .

NOTE: Any models supplied with Q contact material are RoHS compliant. For the latest information regarding RoHS compliance, please go to: www.ittcannon.com/rohs.

SEAL

NONE NO SEAL

E EPOXY SEAL



Dimensions are shown: Inch (mm)
Specifications and dimensions subject to change



Slide