

November 1990  
Edition 3.0

FUJITSU

DATA SHEET


# MB87002

## 1200 BPS MSK MODEM


### 1200 BPS MSK (Minimum Shift Keying) MODEM

The MB87002 is a 1200-bps CMOS minimum shift keying (MSK) single-chip modem for multichannel access (MCA) and radio communication application. Its operation at low supply voltages and low power consumption is especially suitable for portable application.

- Data rate: 1200-bps
- Low power consumption (20 mW with 5 V power supply)
- Low supply voltage operation: 3.0 to 5.5 V (5 V typical)
- On-chip crystal oscillator: 3.6864 MHz
- Switched-capacitor filter (SCF)
- Selectable timing regenerator pull-in characteristic (within 15 bits for high-speed, and within 25 bits for low-speed operation)
- Low external component count
- TTL compatible inputs and outputs



PLASTIC PACKAGE  
(DIP-16P-M03)



PLASTIC PACKAGE  
(FPT-16P-M03)

### ABSOLUTE MAXIMUM RATINGS (See NOTE)

| Parameter            | Symbol    | Pin name        | Value       |     |                | Unit |
|----------------------|-----------|-----------------|-------------|-----|----------------|------|
|                      |           |                 | Min         | Typ | Max            |      |
| Power Supply Voltage | $V_{DD}$  | $V_{DD}$        | $GND - 0.3$ | —   | 7              | V    |
| Input Voltage        | $V_{IN}$  | All input pins  | $GND - 0.3$ | —   | $V_{DD} + 0.3$ | V    |
| Output Voltage       | $V_{OUT}$ | All output pins | $GND - 0.3$ | —   | $V_{DD} + 0.3$ | V    |
| Output Current       | $I_{OUT}$ | All output pins | -10         | —   | 10             | mA   |
| Storage Temperature  | $T_{STG}$ | —               | -55         | —   | 125            | °C   |

**NOTE:** Permanent device damage may occur if the above **Absolute Maximum Ratings** are exceeded. Functional operation should be restricted to the conditions as detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### PIN ASSIGNMENT

(TOP VIEW)


|         |   |    |              |
|---------|---|----|--------------|
| R/TC    | 1 | 16 | $V_{DD}$     |
| CLOCK   | 2 | 15 | DATAIN       |
| OSC1    | 3 | 14 | SEND         |
| OSC2    | 4 | 13 | RESET        |
| DATAOUT | 5 | 12 | BPFOUT       |
| MSKOUT  | 6 | 11 | DPLL         |
| BPFIN   | 7 | 10 | TEST         |
| GND     | 8 | 9  | $1/2 V_{DD}$ |

This device contains circuitry to protect the inputs against damage due to high static voltages or electric fields. However, it is advised that normal precautions be taken to avoid application of any voltage higher than maximum rated voltages to this high impedance circuit.

## PIN DESCRIPTIONS

| Pin No. | Symbol       | I/O | Functional descriptions                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------|--------------|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | R/TC         | I   | Transmit–receive clock output control. When pulled high, the 1.2 kHz transmit clock is output from the CLOCK pin and DATAOUT becomes low. When pulled low, the 1.2 kHz receive clock is output from the CLOCK pin.                                                                                                                                                                                                                     |
| 2       | CLOCK        | O   | Transmit–receive clock output pin. When R/TC pin is pulled high, 1.2 kHz transmit clock is output. When R/TC pin is pulled low, the 1.2 kHz receive clock is output.                                                                                                                                                                                                                                                                   |
| 3       | OSC1         | I   | Pin for external crystal (3.6864 MHz) connection.                                                                                                                                                                                                                                                                                                                                                                                      |
| 4       | OSC2         | O   | Pin for external crystal (3.6864 MHz) connection.                                                                                                                                                                                                                                                                                                                                                                                      |
| 5       | DATAOUT      | O   | Regenerated data output signal.                                                                                                                                                                                                                                                                                                                                                                                                        |
| 6       | MSKOUT       | O   | Modulated signal output pin. $V_{DD}/2$ is output when the RESET pin is pulled low.                                                                                                                                                                                                                                                                                                                                                    |
| 7       | BPFIN        | I   | Demodulated signal input to the receive band–pass filter (BPF).                                                                                                                                                                                                                                                                                                                                                                        |
| 8       | GND          | –   | Ground                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 9       | $1/2 V_{DD}$ | O   | $V_{DD}/2$ reference voltage output                                                                                                                                                                                                                                                                                                                                                                                                    |
| 10      | TEST         | I   | Test function control signal input. In the normal mode, this pin is pulled high or left open. In the test mode, it is pulled low. In the test mode, the BPF IN pin directly accepts Waveform Shaping I and receive LPF input signals, and the DATA IN pin directly accepts Waveform Shaping II input signals. In this mode, the delay detection circuit signal is output from BPFOUT and the receive LPF signal is output from MSKOUT. |
| 11      | DPLL         | I   | DPLL pull–in time control signal input. When pulled low, high–speed operation is selected. When pulled high, low–speed operation is selected.                                                                                                                                                                                                                                                                                          |
| 12      | BPFOUT       | O   | Receive BPF output pin.                                                                                                                                                                                                                                                                                                                                                                                                                |
| 13      | RESET        | I   | Device reset signal input. A low on this pin resets all circuits. Pulled high or left open to enable device operation.                                                                                                                                                                                                                                                                                                                 |
| 14      | SEND         | I   | Data transmit enable. With the reset high or open, transmit signals are output when this pin is pulled low to high.                                                                                                                                                                                                                                                                                                                    |
| 15      | DATAIN       | I   | Transmit data input to the receive BPF.                                                                                                                                                                                                                                                                                                                                                                                                |
| 16      | $V_{DD}$     | –   | Supply voltage pin (+3.0 to +5.5 V).                                                                                                                                                                                                                                                                                                                                                                                                   |

# MB87002 BLOCK DIAGRAM

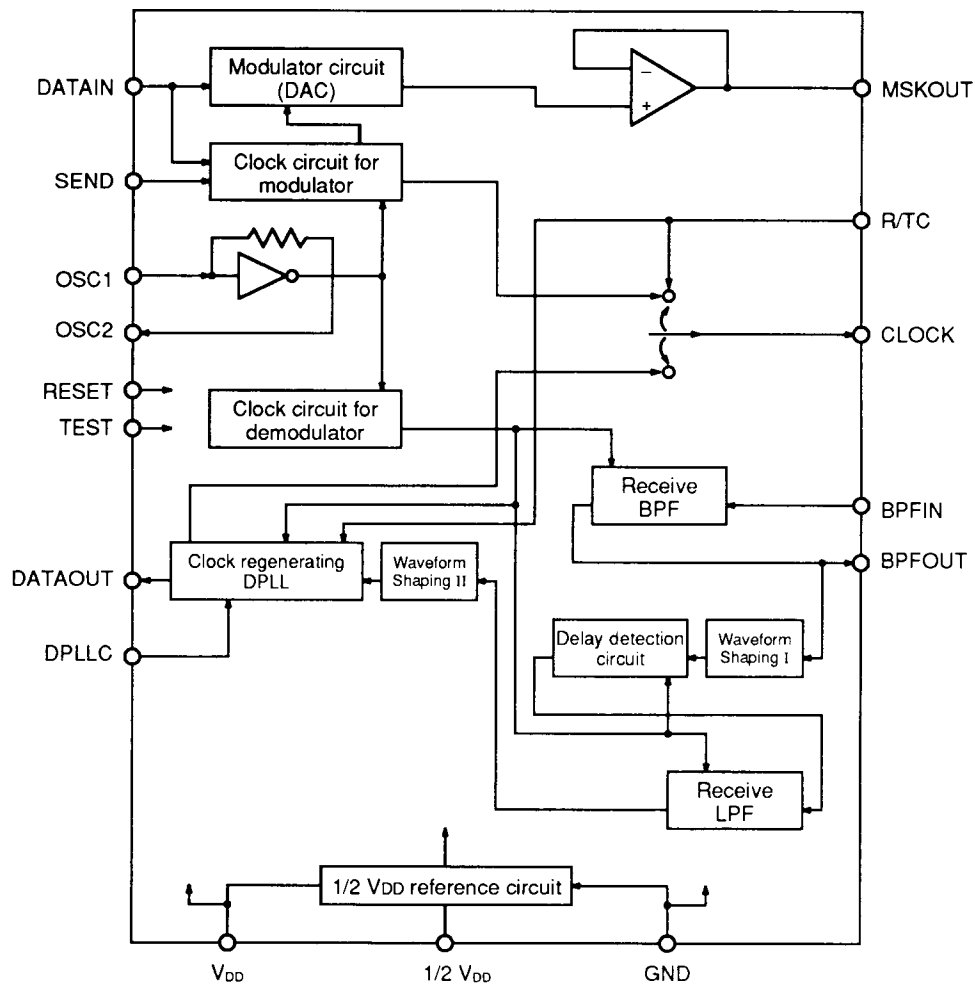

## FUNCTION DESCRIPTION

The timing generating section generates the clock signals required by the modulator and demodulator. The basic clock is generated by an internal oscillator and external crystal (3.6864 MHz).

Modulator uses a programmable DAC with a 6 bit resistor string. The MSKOUT output is 1200 Hz for input 1 and 1800 Hz for input 0 synchronized with transmit clock. Before the transmit signal is output, a fixed level of  $1/2 V_{DD}$  is output by pulling the SEND pin low. The demodulator is composed of a band-pass filter (BPF), a delay detection circuit, a low-pass filter (LPF), and a digital phase-locked loop (DPLL). The BPF removes noise components from the 1,200 Hz and 1,800 Hz receive signals from the BPFIN pin and consists of a 10th-order Chebyshev switched-capacitor filter (SCF). The delay detection circuit, after conversion of the BPF output from analog to digital in the waveform shaping circuit, regenerates data by delay detection. The noise components in the regenerated data are removed by the LPF. The LPF is a third-order Butterworth filter and removes noise components of 800 Hz or higher. The DPLL extracts the receive clock from the regenerated data. The regenerated data is output from the DATAOUT pin synchronized with the receive clock. The DPLL has a tendency to degrade the bit error rate when the pull-in time is shortened. This IC allows users to choose between two pull-in times. When the DPLLC pin is pulled low, the high-speed mode is selected. When pulled high, the low-speed mode is selected.

The on-chip  $1/2 V_{DD}$  circuit supplies the reference voltage required by BPF, LPF, and waveform shaping circuits and reduces external circuitry and component count.

**NOTE:** Devices consisting of mixed analog and digital signal processing circuits are usually difficult to test. The MB87002 incorporates a test circuit which simplifies independent testing of the BPF, delay detection circuit, LPF, and DPLL.

## RECOMMENDED OPERATING CONDITIONS

| Parameter                      | Symbol     | Pin name       | Value |     |          | Unit       |
|--------------------------------|------------|----------------|-------|-----|----------|------------|
|                                |            |                | Min   | Typ | Max      |            |
| Power Supply Voltage           | $V_{DD}$   | $V_{DD}$       | 3.0   | 5.0 | 5.5      | V          |
| Input Voltage                  | $V_{IN}$   | All input pins | 0     | –   | $V_{DD}$ | V          |
| OSC1 Pin Load Capacitance      | $C_{OSC1}$ | OSC1           | 25    | –   | 50       | pF         |
| OSC2 Pin Load Capacitance      | $C_{OSC2}$ | OSC2           | 25    | –   | 50       | pF         |
| Analog Output Load Resistance  | $R_{MO}$   | MSKOUT         | 10    | –   | –        | k $\Omega$ |
| Analog Output Load Capacitance | $C_{MO}$   | MSKOUT         | –     | –   | 30       | pF         |
| Operating Temperature          | $T_A$      | –              | –10   | –   | 70       | °C         |

# ELECTRICAL CHARACTERISTICS

DC characteristics ( $V_{DD} = 4.5 \sim 5.5 \text{ V}$ )

$T_A = 25^\circ\text{C}$

| Parameter                             | Symbol     | Pin name                               | Condition                                          | Value                |              |                      | Unit             |
|---------------------------------------|------------|----------------------------------------|----------------------------------------------------|----------------------|--------------|----------------------|------------------|
|                                       |            |                                        |                                                    | Min                  | Typ          | Max                  |                  |
| Power Supply Current                  | $I_{DD}$   | $V_{DD}$                               |                                                    | –                    | 4            | 8                    | mA               |
| Digital Input Low Voltage             | $V_{IL}$   | RESET, SEND, DATAIN, DPLLC, R/TC, TEST |                                                    | 0                    | –            | 0.8                  | V                |
| Digital Input High Voltage            | $V_{IH}$   | RESET, SEND, DATAIN, DPLLC, R/TC, TEST |                                                    | 2.2                  | –            | $V_{DD}$             | V                |
| Digital Input Low Current             | $I_{IL}$   | SEND, DATAIN, DPLLC, R/TC              | $V_{IN} = \text{GND}$                              | –10                  | –            | 0                    | $\mu\text{A}$    |
| Digital Input High Current            | $I_{IH}$   | RESET, SEND, DATAIN, DPLLC, R/TC, TEST | $V_{IN} = V_{DD}$                                  | 0                    | –            | 10                   | $\mu\text{A}$    |
| Pull-up Resistance                    | $R_{PLU}$  | RESET, TEST                            |                                                    | 25                   | 50           | 100                  | $\text{k}\Omega$ |
| Digital Output Low Voltage            | $V_{OL}$   | DATAOUT, CLOCK                         | $I_{OL} = 2.0 \text{ mA}$                          | 0                    | –            | 0.4                  | V                |
| Digital Output High Voltage           | $V_{OH}$   | DATAOUT, CLOCK                         | $I_{OH} = 1.0 \text{ mA}$                          | 2.4                  | –            | $V_{DD}$             | V                |
| Oscillator Frequency                  | $OSC_{IN}$ | OSC1, OSC2                             |                                                    | –                    | 3.6864       | –                    | MHz              |
| Analog Input Resistance 1             | $R_{AIN1}$ | BPFIN                                  | Input pin– $1/2 V_{DD}$                            | 50                   | 100          | 200                  | $\text{k}\Omega$ |
| Analog Input Voltage 1                | $V_{AIN1}$ | BPFIN                                  |                                                    | 0.5                  | –            | 2.5                  | $V_{P-P}$        |
| Analog Output Voltage 1               | $A_{OUT1}$ | MSKOUT                                 | Operation                                          | 0.8                  | 1.0          | 1.2                  | $V_{P-P}$        |
|                                       |            |                                        | Offset voltage in operation                        | $1/2 V_{DD}$<br>–0.3 | $1/2 V_{DD}$ | $1/2 V_{DD}$<br>+0.3 | V                |
|                                       |            |                                        | RESET = Low                                        | $1/2 V_{DD}$<br>–0.3 | $1/2 V_{DD}$ | $1/2 V_{DD}$<br>+0.3 | V                |
| Receive BPF Absolute Gain             | $ABS_1$    | –                                      | Input frequency<br>1500 Hz                         | –1.0                 | 0            | 1.0                  | dB               |
| Receive BPF Frequency Characteristics | $F_1$      | –                                      | 0–300 Hz                                           | –                    | –            | –40.0                | dB               |
|                                       |            |                                        | 900–1200 Hz                                        | –3.5                 | –            | –                    | dB               |
|                                       |            |                                        | 1200–1800 Hz                                       | –1.0                 | –            | –                    | dB               |
|                                       |            |                                        | 1800–2100 Hz                                       | –3.5                 | –            | –                    | dB               |
|                                       |            |                                        | 3000–5000 Hz<br>Reference frequency<br>1500 Hz     | –                    | –            | –30.0                | dB               |
| Receive LPF Cutoff Frequency          | $F_0$      | –                                      | 3 dB down                                          | –                    | 800          | –                    | Hz               |
| Receive LPF Absolute Gain             | $ABS_2$    | –                                      | 0 Hz <<br>Input frequency<br>$\leq 300 \text{ Hz}$ | –                    | –6.0         | –                    | dB               |

# MB87002

## DC characteristics ( $V_{DD} = 3.0 \sim 4.5 \text{ V}$ )


$T_A = 25^\circ\text{C}$

| Parameter                             | Symbol     | Pin name                               | Condition                                    | Value                |                     |                      | Unit          |
|---------------------------------------|------------|----------------------------------------|----------------------------------------------|----------------------|---------------------|----------------------|---------------|
|                                       |            |                                        |                                              | Min                  | Typ                 | Max                  |               |
| Power Supply Current                  | $I_{DD}$   | $V_{DD}$                               |                                              | –                    | –                   | 8                    | mA            |
| Digital Input Low Voltage             | $V_{IL}$   | RESET, SEND, DATAIN, DPLLC, R/TC, TEST |                                              | 0                    | –                   | 0.6                  | V             |
| Digital Input High Voltage            | $V_{IH}$   | RESET, SEND, DATAIN, DPLLC, R/TC, TEST |                                              | 2.2                  | –                   | $V_{DD}$             | V             |
| Digital Input Low Current             | $I_{IL}$   | SEND, DATAIN, DPLLC, R/TC              | $V_{IN} = \text{GND}$                        | –10                  | –                   | 0                    | $\mu\text{A}$ |
| Digital Input High Current            | $I_{IH}$   | RESET, SEND, DATAIN, DPLLC, R/TC, TEST | $V_{IN} = V_{DD}$                            | 0                    | –                   | 10                   | $\mu\text{A}$ |
| Pull-up Resistance                    | $R_{PLU}$  | RESET, TEST                            |                                              | 25                   | 50                  | 100                  | k $\Omega$    |
| Digital Output Low Voltage            | $V_{OL}$   | DATAOUT, CLOCK                         | $I_{OL} = 0.5 \text{ mA}$                    | 0                    | –                   | 0.4                  | V             |
| Digital Output High Voltage           | $V_{OH}$   | DATAOUT, CLOCK                         | $I_{OH} = 0.5 \text{ mA}$                    | 2.4                  | –                   | $V_{DD}$             | V             |
| Oscillator Frequency                  | $OSC_{IN}$ | OSC1, OSC2                             |                                              | –                    | 3.6864              | –                    | MHz           |
| Analog Input Resistance 1             | $R_{AIN1}$ | BPFIN                                  | Input pin–1/2 $V_{DD}$                       | 50                   | 100                 | 200                  | k $\Omega$    |
| Analog Input Voltage 1                | $V_{AIN1}$ | BPFIN                                  |                                              | 0.5                  | –                   | $V_{DD} - 2.0$       | $V_{P-P}$     |
| Analog Output Voltage 1               | $A_{OUT1}$ | MSKOUT                                 | Operation                                    | $V_{DD} \times 0.16$ | $V_{DD} \times 0.2$ | $V_{DD} \times 0.24$ | $V_{P-P}$     |
|                                       |            |                                        | Offset voltage in operation                  | $1/2 V_{DD} - 0.3$   | $1/2 V_{DD}$        | $1/2 V_{DD} + 0.3$   | V             |
|                                       |            |                                        | RESET = Low                                  | $1/2 V_{DD} - 0.3$   | $1/2 V_{DD}$        | $1/2 V_{DD} + 0.3$   | V             |
| Receive BPF Absolute Gain             | $ABS_1$    | –                                      | Input frequency 1500 Hz                      | –2.0                 | 0                   | 2.0                  | dB            |
| Receive BPF Frequency Characteristics | $F_1$      | –                                      | 0–300 Hz                                     | –                    | –                   | –30.0                | dB            |
|                                       |            |                                        | 900–1200 Hz                                  | –3.5                 | –                   | –                    | dB            |
|                                       |            |                                        | 1200–1800 Hz                                 | –1.0                 | –                   | –                    | dB            |
|                                       |            |                                        | 1800–2100 Hz                                 | –3.5                 | –                   | –                    | dB            |
|                                       |            |                                        | 3000–5000 Hz<br>Reference frequency 1500 Hz  | –                    | –                   | –25.0                | dB            |
| Receive LPF Cutoff Frequency          | $F_0$      | –                                      | 3 dB down                                    | –                    | 800                 | –                    | Hz            |
| Receive LPF Absolute Gain             | $ABS_2$    | –                                      | 0 Hz < Input frequency $\leq 300 \text{ Hz}$ | –                    | –6.0                | –                    | dB            |

AC characteristics ( $V_{DD} = 3.0 \sim 5.5 \text{ V}$ )


| Parameter                   | Symbol     | Pin name | Condition                                                    | Value |      |      | Unit          |
|-----------------------------|------------|----------|--------------------------------------------------------------|-------|------|------|---------------|
|                             |            |          |                                                              | Min   | Typ  | Max  |               |
| Transmit Clock Delay Time 1 | $t_{dRCH}$ | CLOCK    | R/TC = "H"                                                   | 0     | 150  | 417  | $\mu\text{s}$ |
| Transmit Clock Delay Time 2 | $t_{dSCH}$ | CLOCK    | R/TC = "H"                                                   | 417   | 570  | 834  | $\mu\text{s}$ |
| Transmit Clock Delay Time 3 | $t_{dSCL}$ | CLOCK    | R/TC = "H"                                                   | 0     | 150  | 417  | $\mu\text{s}$ |
| Transmit Clock High Width   | $t_{wHC1}$ | CLOCK    | R/TC = "H"                                                   | 390   | 417  | 444  | $\mu\text{s}$ |
| Transmit Clock Low Width    | $t_{wLC1}$ | CLOCK    | R/TC = "H"                                                   | 390   | 417  | 444  | $\mu\text{s}$ |
| SEND Setup Time             | $t_{SSC}$  | SEND     | R/TC = "H"                                                   | 1     | —    | —    | $\mu\text{s}$ |
| SEND Hold Time              | $t_{hSC}$  | SEND     | R/TC = "H"                                                   | 1     | —    | —    | $\mu\text{s}$ |
| DATAIN Setup Time           | $t_{SDC}$  | DATAIN   | R/TC = "H"                                                   | 1     | —    | —    | $\mu\text{s}$ |
| DATAIN Hold Time            | $t_{hDC}$  | DATAIN   | R/TC = "H"                                                   | 1     | —    | —    | $\mu\text{s}$ |
| MSKOUT Output Delay Time 1  | $t_{dCM1}$ | MSKOUT   | R/TC = "H"                                                   | —     | —    | 10   | $\mu\text{s}$ |
| MSKOUT Output Delay Time 2  | $t_{dCM2}$ | MSKOUT   | R/TC = "H"                                                   | —     | —    | 10   | $\mu\text{s}$ |
| BPFIN Invalid Time          | $t_{dRB}$  | BPFIN    |                                                              | 0     | —    | 10   | ms            |
| Pull-in Bit Number          | N          | —        | R/TC = "L",<br>DPLL = "L",<br>BPFIN: No noise                | —     | —    | 15   | bit           |
| Demodulator Delay Time      | $t_{dBD}$  | DATAOUT  | R/TC = "L",<br>DPLL = "L",<br>N $\geq 15$<br>BPFIN: No noise | 1483  | 1900 | 2317 | $\mu\text{s}$ |
| DATAOUT Timing              | $t_{dCD}$  | DATAOUT  | R/TC = "L"                                                   | —1    | —    | 1    | $\mu\text{s}$ |
| Receive Clock High Width    | $t_{wHC2}$ | CLOCK    | R/TC = "L",<br>DPLL = "L",<br>N $\geq 15$<br>BPFIN: No noise | 338   | 417  | 496  | $\mu\text{s}$ |
| Receive Clock Low Width     | $t_{wLC2}$ | CLOCK    | R/TC = "L",<br>DPLL = "L",<br>N $\geq 15$<br>BPFIN: No noise | 338   | 417  | 496  | $\mu\text{s}$ |
| RESET Low Width             | $t_{wLR}$  | RESET    |                                                              | 20    | —    | —    | $\mu\text{s}$ |
| MSKOUT Output Delay Time 3  | $t_{dRM}$  | MSKOUT   |                                                              | 0     | —    | 10   | $\mu\text{s}$ |
| Transmit Clock Delay Time 4 | $t_{dTC4}$ | CLOCK    |                                                              | 0     | —    | 2    | $\mu\text{s}$ |
| Receive Clock Delay Time 1  | $t_{dRC1}$ | CLOCK    |                                                              | 0     | —    | 2    | $\mu\text{s}$ |

TYPICAL CONNECTION EXAMPLE

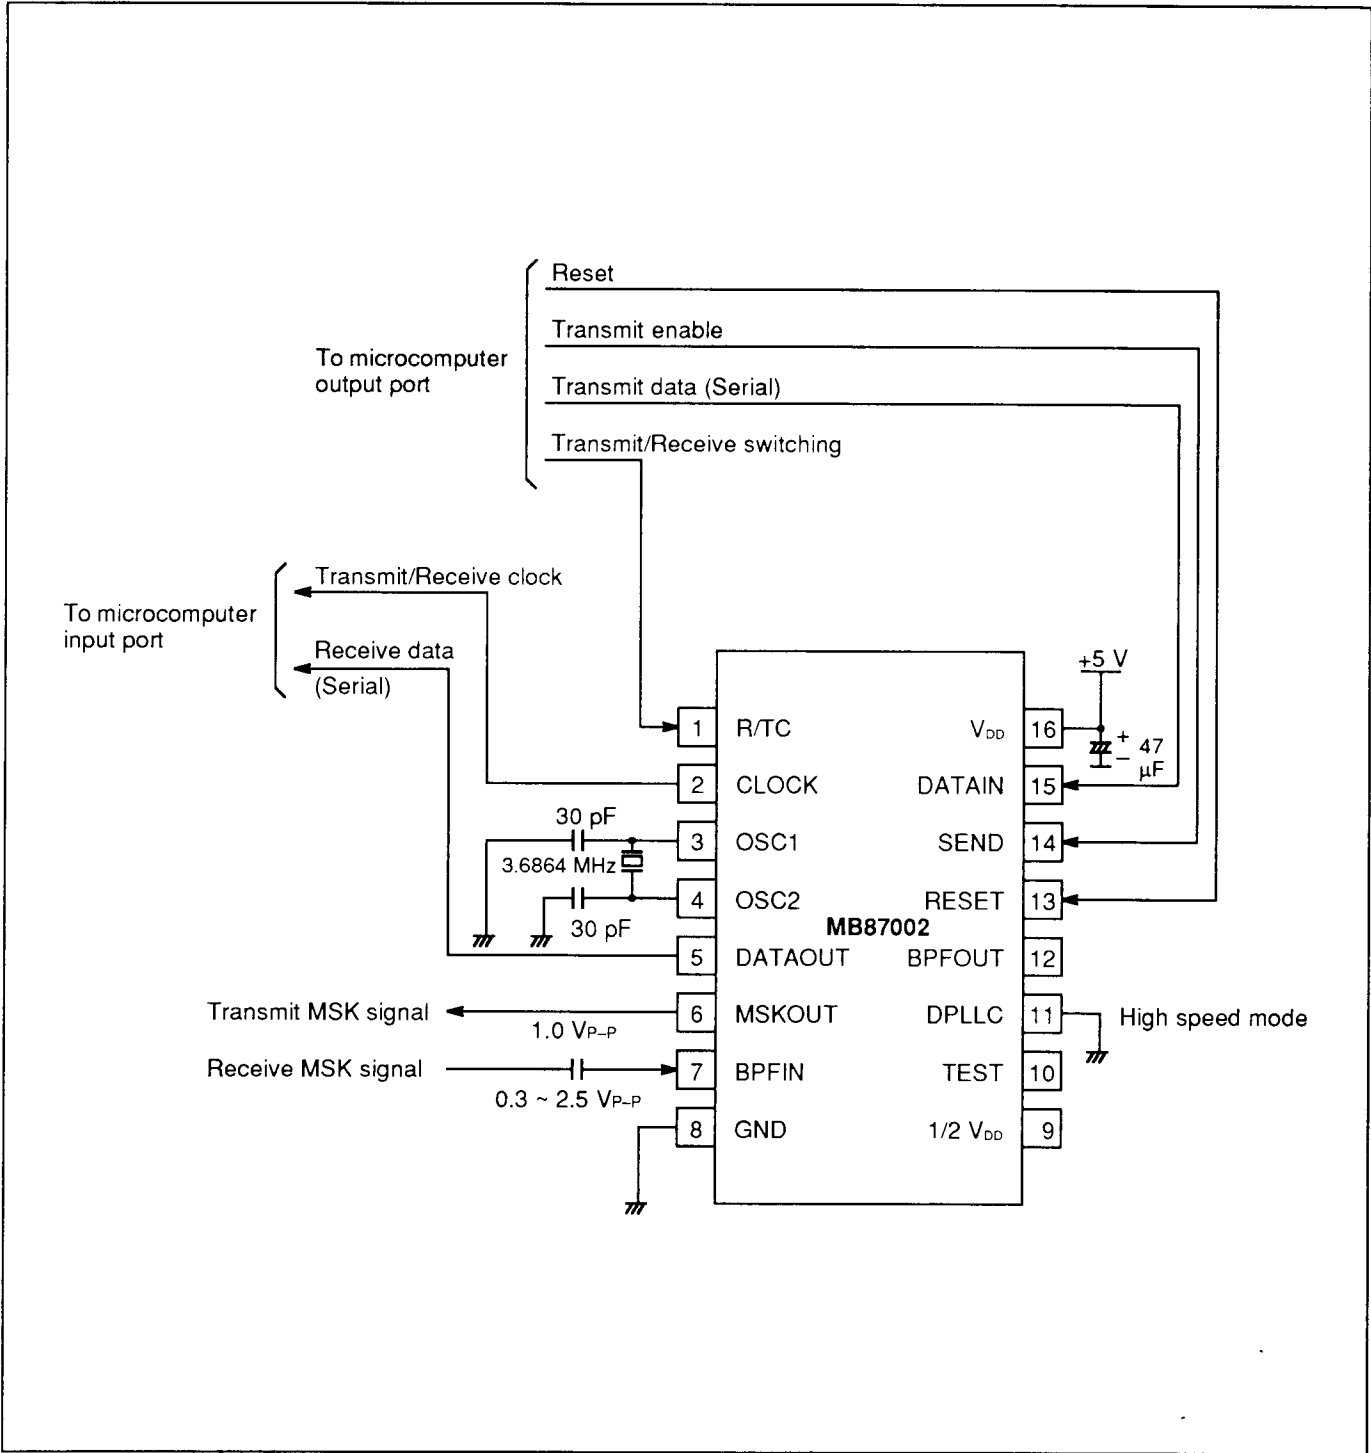




## BPF FREQUENCY CHARACTERISTICS

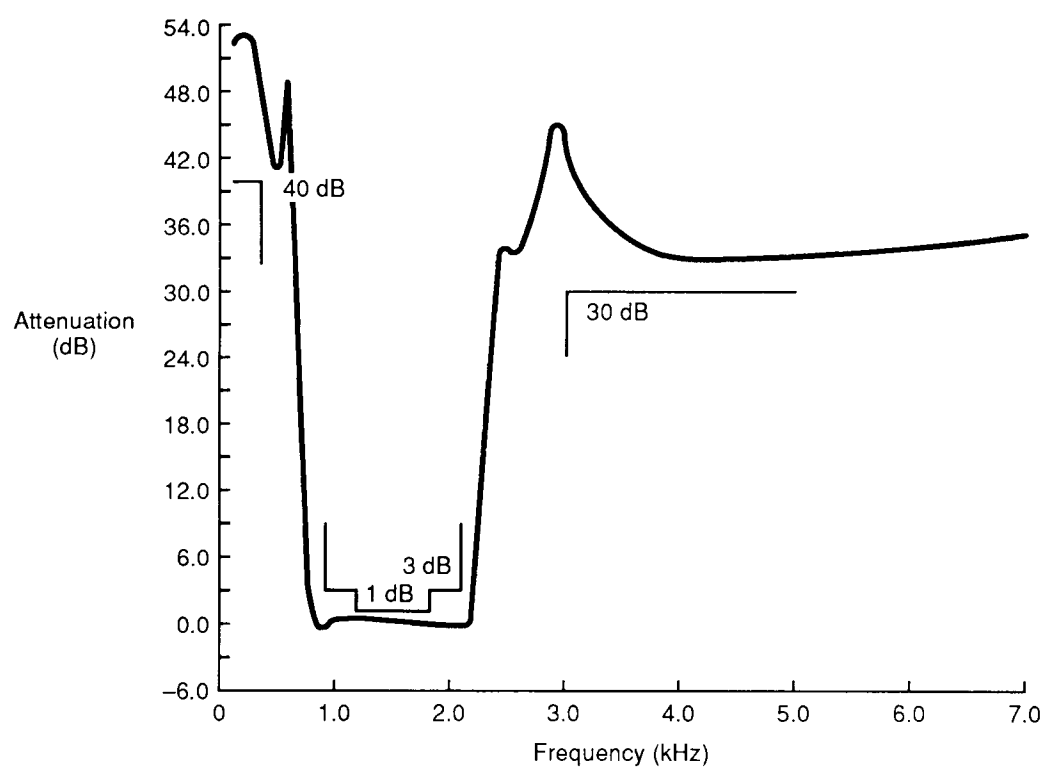


# TIMING CHART

Modulator timing chart (TEST pin = High or Open)

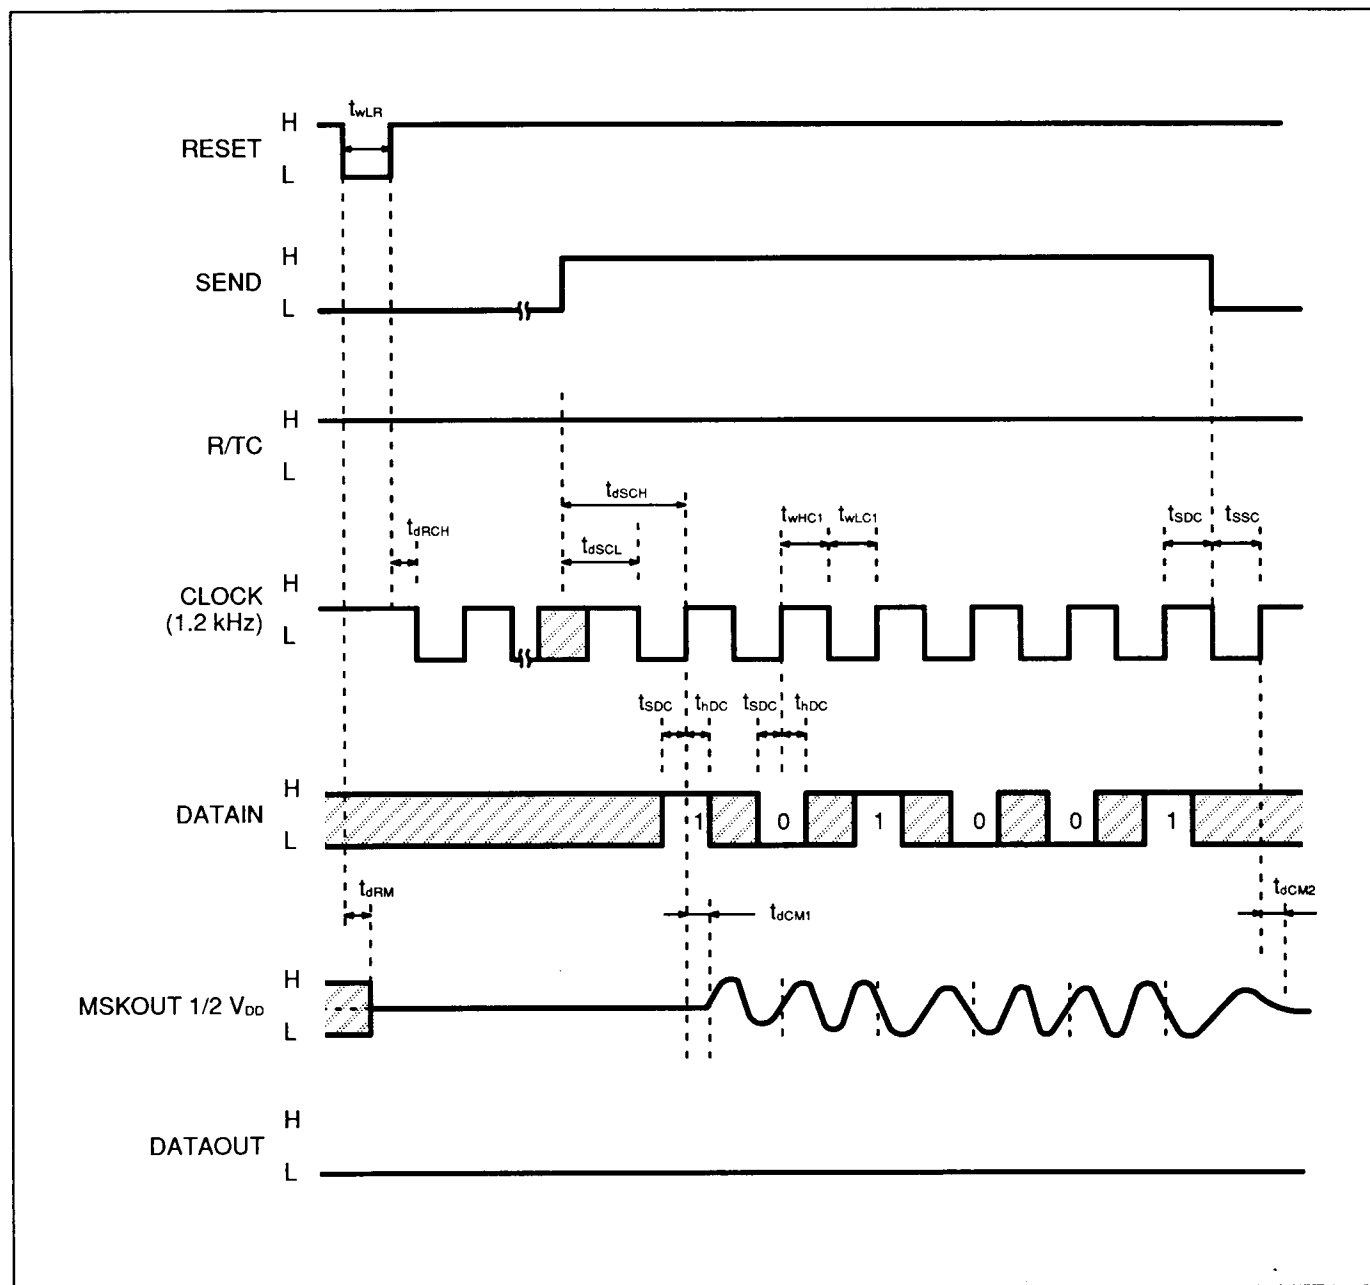

- NOTE:**
1. SEND pin is pulled high after low-to-high transition of the RESET pin.
  2. DATAIN signal is read at the rising edge of the CLOCK.
  3. When SEND pin changes from low to high, the CLOCK pin is pulled high once. Then 1.2 kHz clock is output.
  4. When R/TC pin is pulled high, DATAOUT pin outputs low.
  5. When power is first applied, RESET pin must be set to low to rest all circuits before use.

Demodulator timing chart (TEST pin = High or Open)


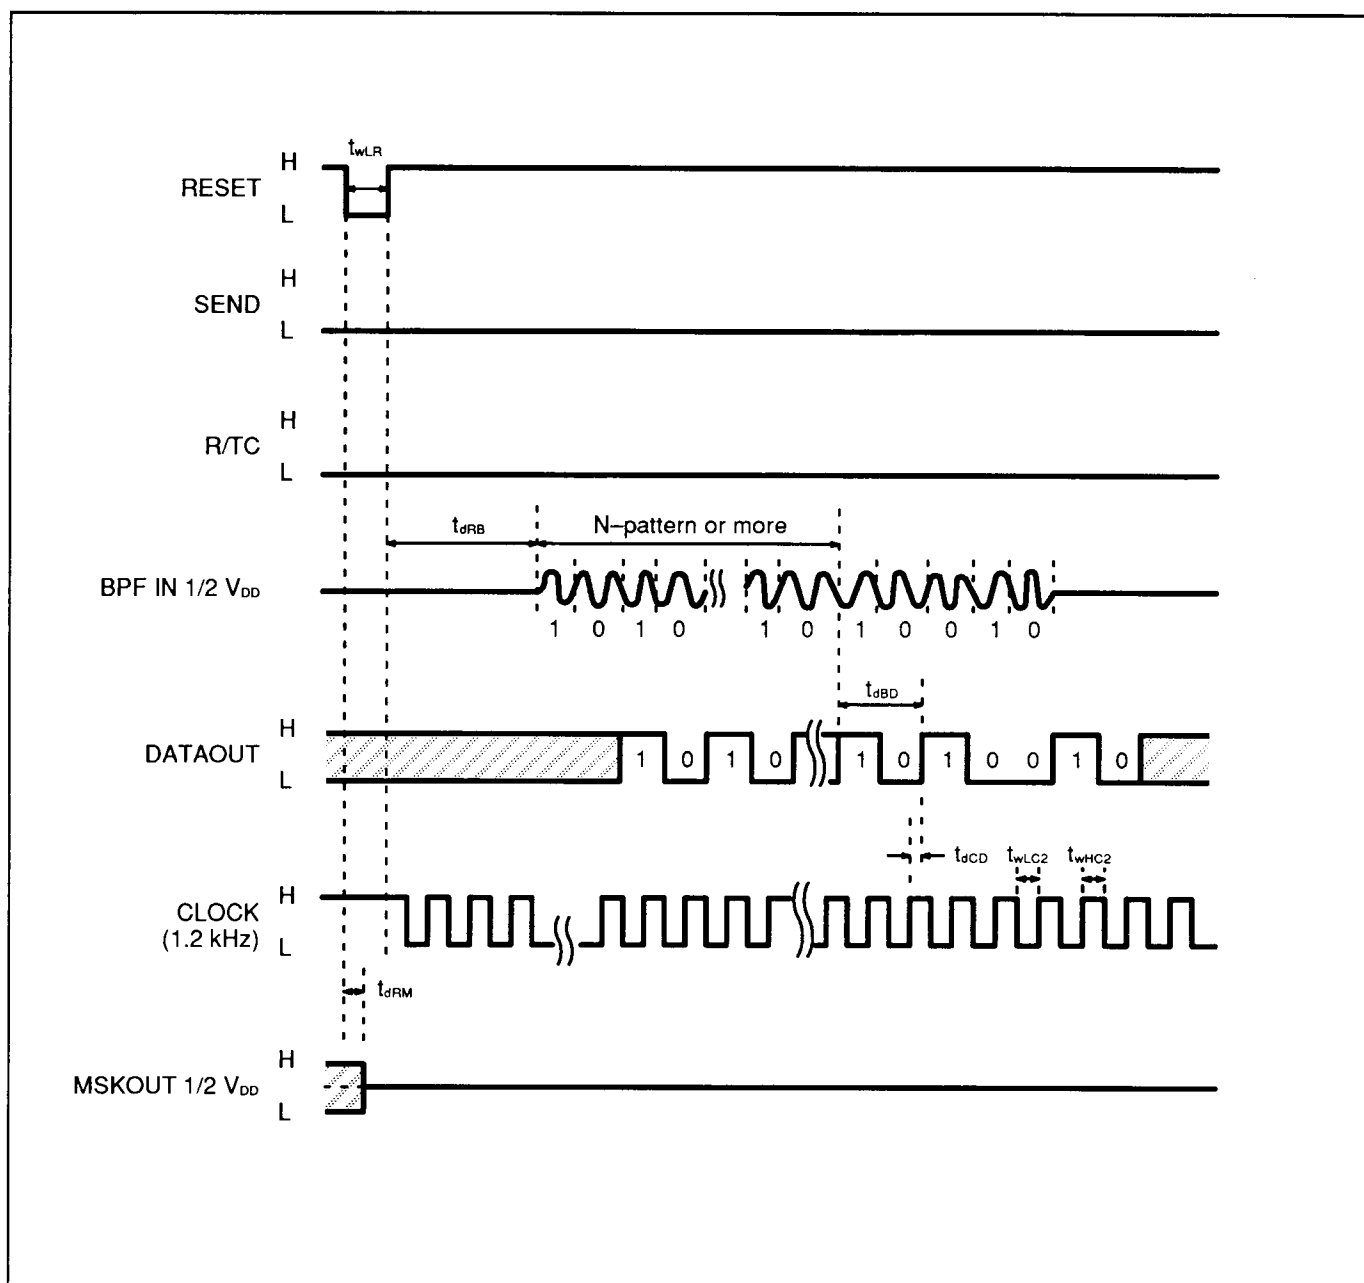


**NOTE:** 1. DATAOUT is output synchronized with the rising edge of the CLOCK.

2. When demodulator section is used, SEND pin must be set to high or low. When SEND pin is set to low, MSKOUT is fixed to  $1/2 V_{DD}$ .


3. When power is first applied, RESET pin must be set to low to reset all circuits before use.

Clock output timing chart

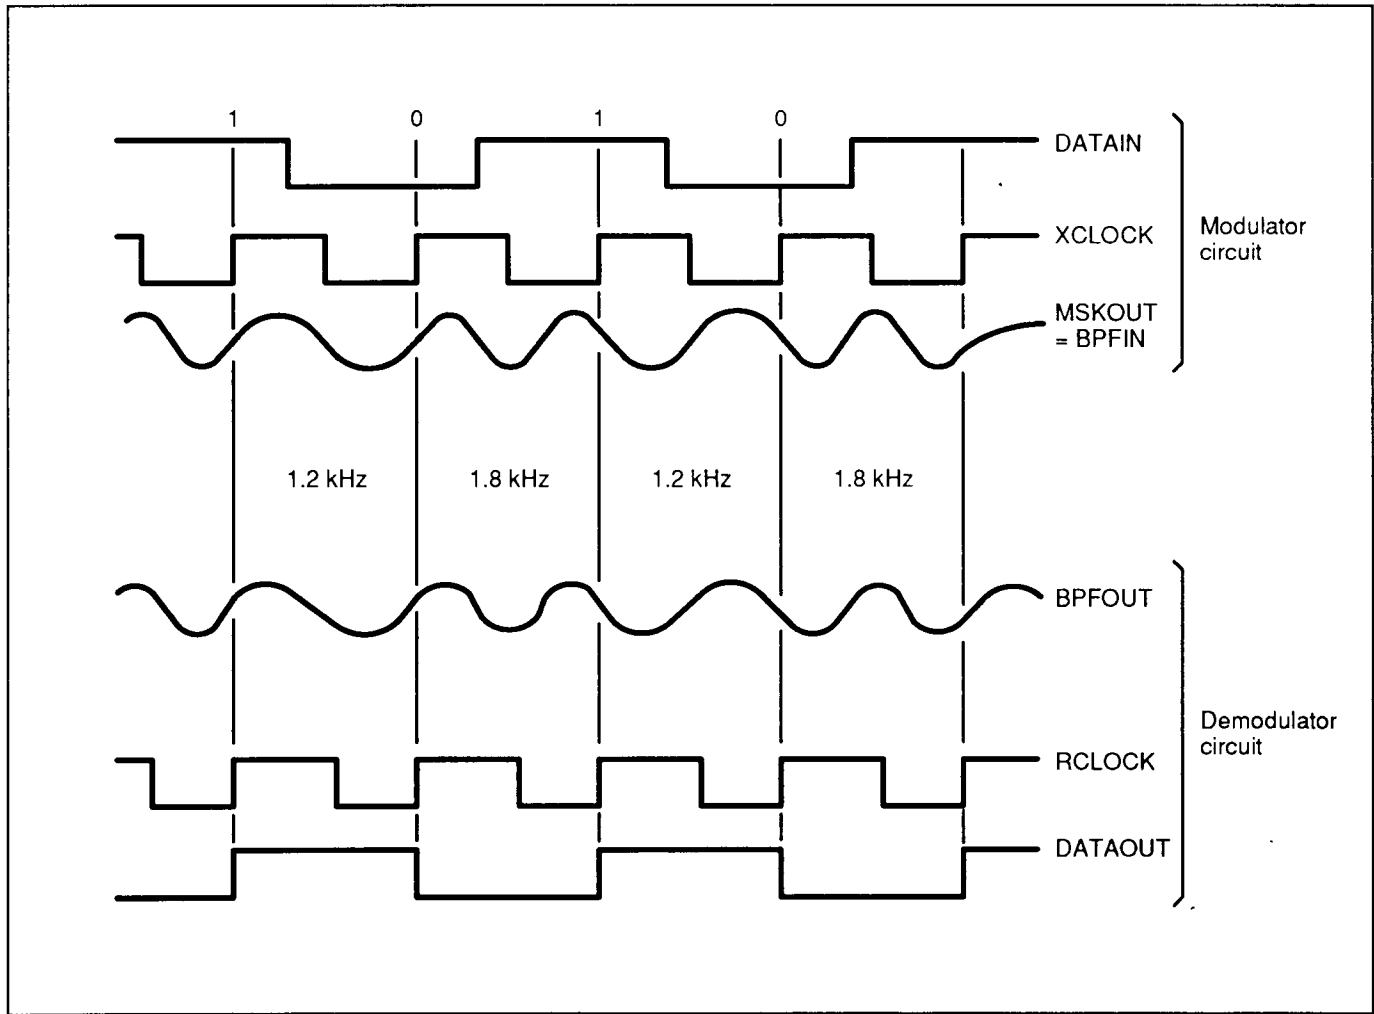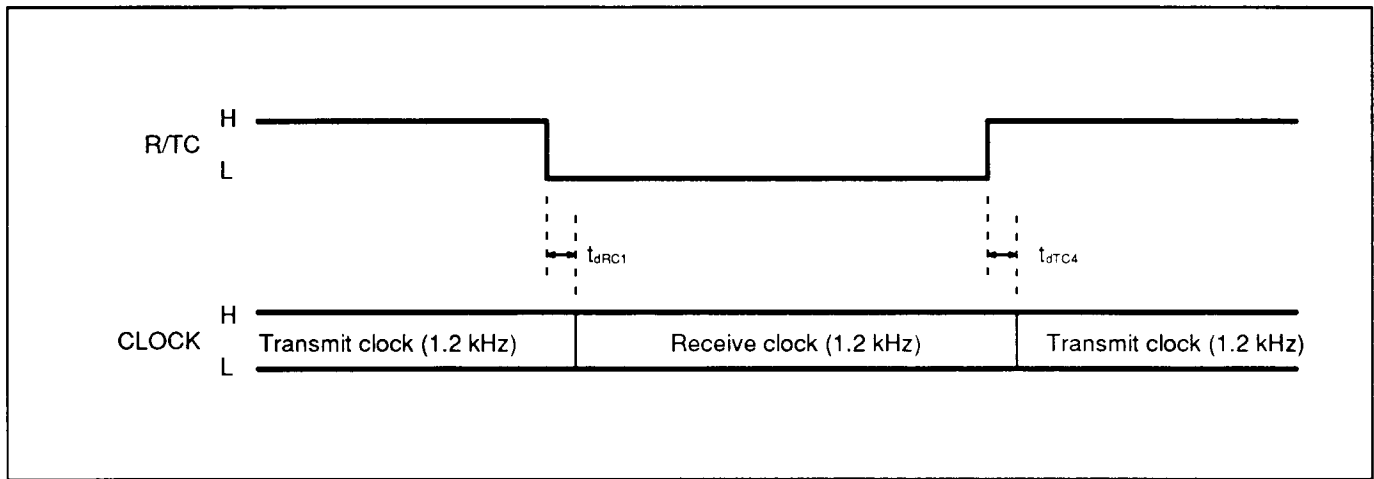

# PACKAGE DIMENSIONS


Plastic DIP, 16 pins  
(DIP-16P-M03)

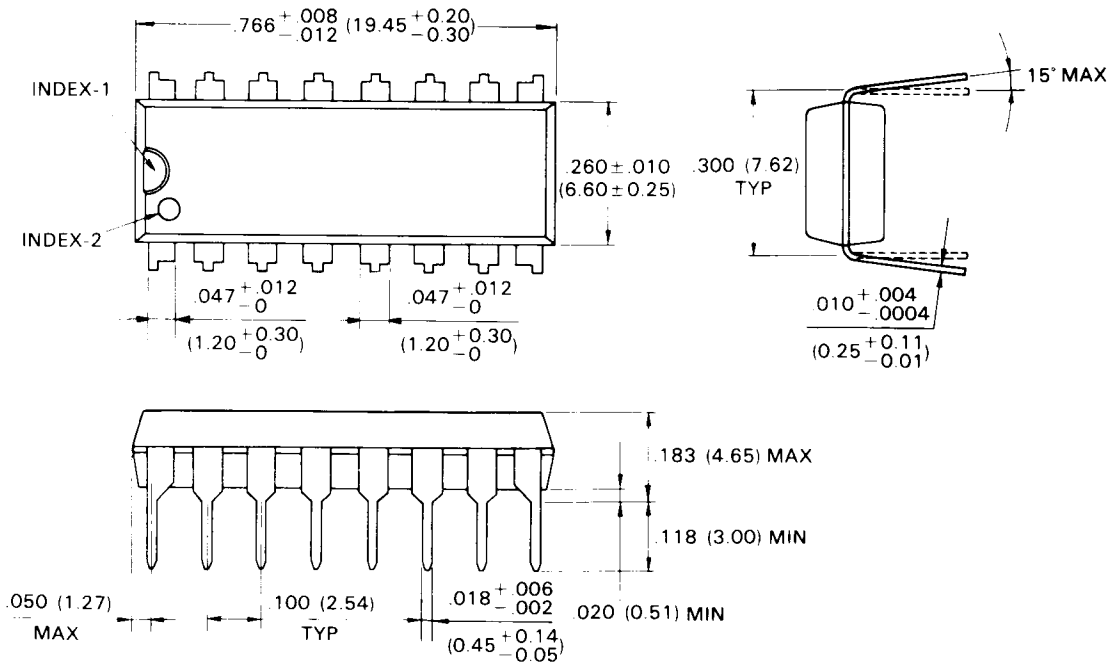

© 1988 FUJITSU LIMITED D16030S-3C-1

Units: mm (inches)

**Plastic SOP, 16 pins**  
(FPT-16P-M03)

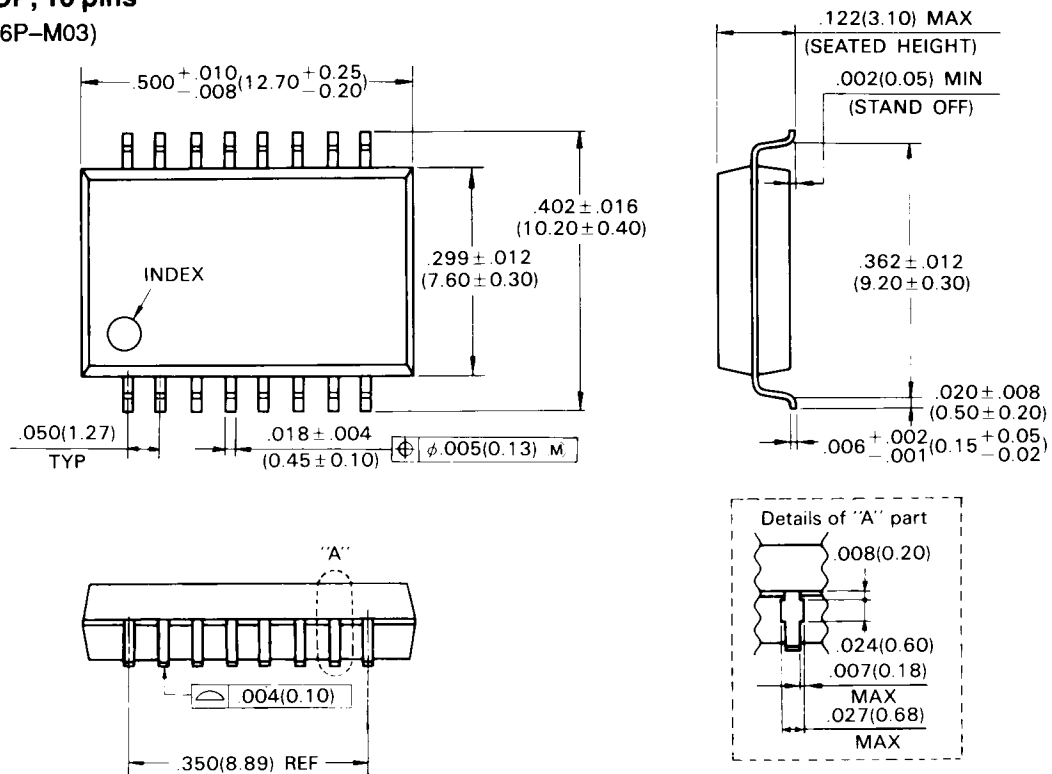

© 1989 FUJITSU LIMITED F16008S-3C-1

Units: mm (inches)

All Rights Reserved.

Circuit diagrams utilizing Fujitsu products are included as a means of illustrating typical semiconductor applications. Complete Information sufficient for construction purposes is not necessarily given.

The information contained in this document has been carefully checked and is believed to be reliable. However, Fujitsu assumes no responsibility for inaccuracies.

The Information contained in this document does not convey any license under the copyrights, patent rights or trademarks claimed and owned by Fujitsu.

Fujitsu reserves the right to change products or specifications without notice.

No part of this publication may be copied or reproduced in any form or by any means, or transferred to any third party without prior written consent of Fujitsu.