



SAW Components

Data Sheet B4908

Data Sheet

An abstract, grayscale background graphic featuring a globe with a grid pattern, overlaid with a large, stylized, and slightly blurred "EPCOS" logo. The logo is rendered in a light gray, almost white, color, giving it a three-dimensional appearance as if it's floating or attached to the globe. The overall effect is a modern, technological aesthetic.




SAW Components	B4908
Low-Loss Filter for Mobile Communication	158,55 MHz
Data Sheet	

Features

- Low-loss IF filter for mobile telephone, transmit path
- Low amplitude ripple
- Usable passbands 1,3 MHz
- Balanced and unbalanced operation possible
- Ceramic package for **Surface Mounted Technology (SMT)**

Ceramic package QCC8B

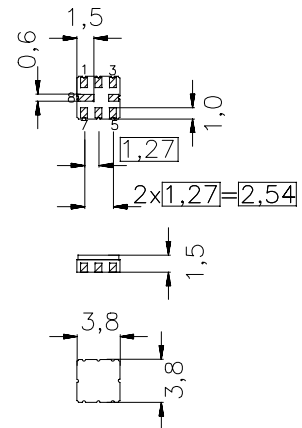


Terminals

- Ni, gold-plated

Dimensions in mm, approx. weight 0,07 g

Pin configuration

- | | |
|-----|----------------|
| 2 | Input |
| 3 | Input |
| 6 | Output |
| 7 | Output |
| 4,8 | Case - Ground |
| 1,5 | To be grounded |



Type	Ordering code	Marking and Package according to	Packing according to
B4908	B39161-B4908-Z810	C61157-A7-A46	F61074-V8037-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40 / + 85	°C	
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	0	V	
Source power	P_{IN}	10	dBm	source impedance 50 Ω



SAW Components

B4908

Low-Loss Filter for Mobile Communication

158,55 MHz

Data Sheet



Characteristics

Operating temperature range:

$T = -40$ to $+85$ °C

Terminating source impedance:

$Z_S = 470 \Omega \parallel 470$ nH, single ended (pin 3)

Terminating load impedance:

$Z_L = 470 \Omega \parallel 680$ nH, balanced

				min.	typ.	max.	
Center frequency	f_c			—	158,55	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$			—	2,5	3,0	dB
		157,90 ... 159,20 MHz					
Amplitude ripple in passband (p-p)	$\Delta\alpha$			—	0,5	1,0	dB
		157,90 ... 159,20 MHz					
Phase linearity deviation	$\Delta\phi$			—	0,6	1,5	°rms
		157,90 ... 159,20 MHz					
Attenuation	$\alpha_{\min}$						
		0,00 ... 130,00 MHz		50	55	—	dB
		130,00 ... 139,00 MHz		40	52	—	dB
		139,00 ... 151,55 MHz		30	39	—	dB
		165,55 ... 178,00 MHz		14	16	—	dB
		178,00 ... 475,00 MHz		35	40	—	dB
		475,00 ... 1000,00 MHz		45	70	—	dB



SAW Components

B4908


Low-Loss Filter for Mobile Communication

158,55 MHz


Data Sheet



Transfer function (wideband):

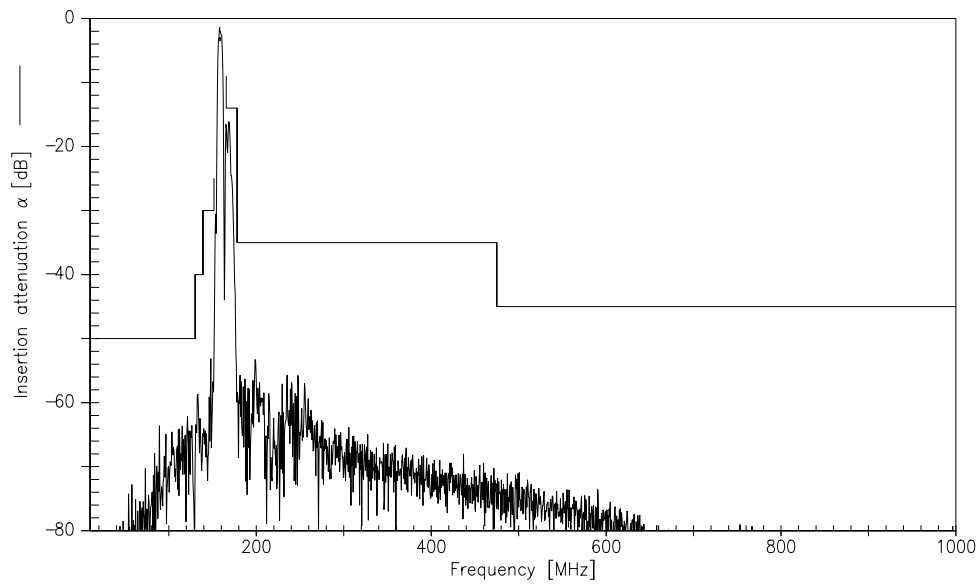

Transfer function (narrowband):

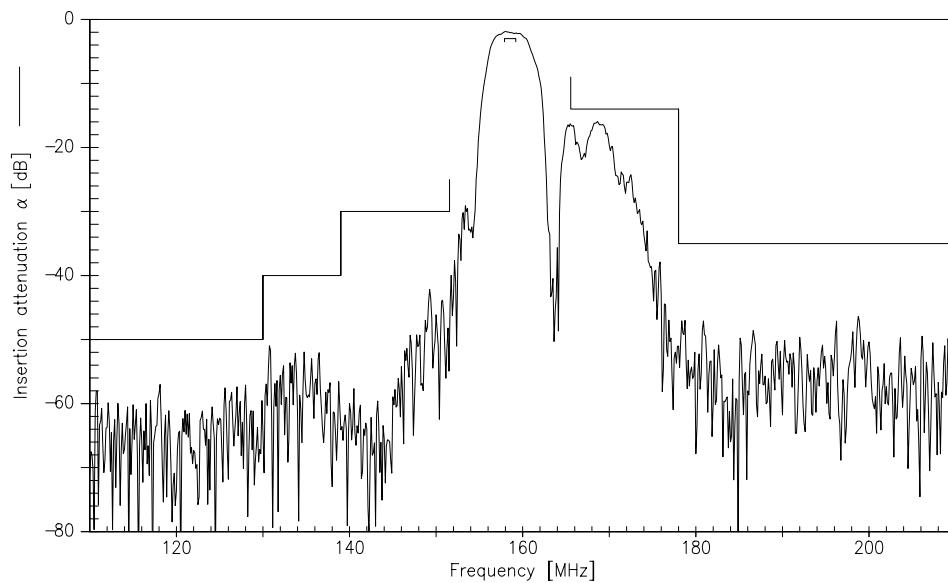



SAW Components

B4908

Low-Loss Filter for Mobile Communication


158,55 MHz

Data Sheet



Transfer function (passband) :

Phase linearity deviation = 0.65° rms

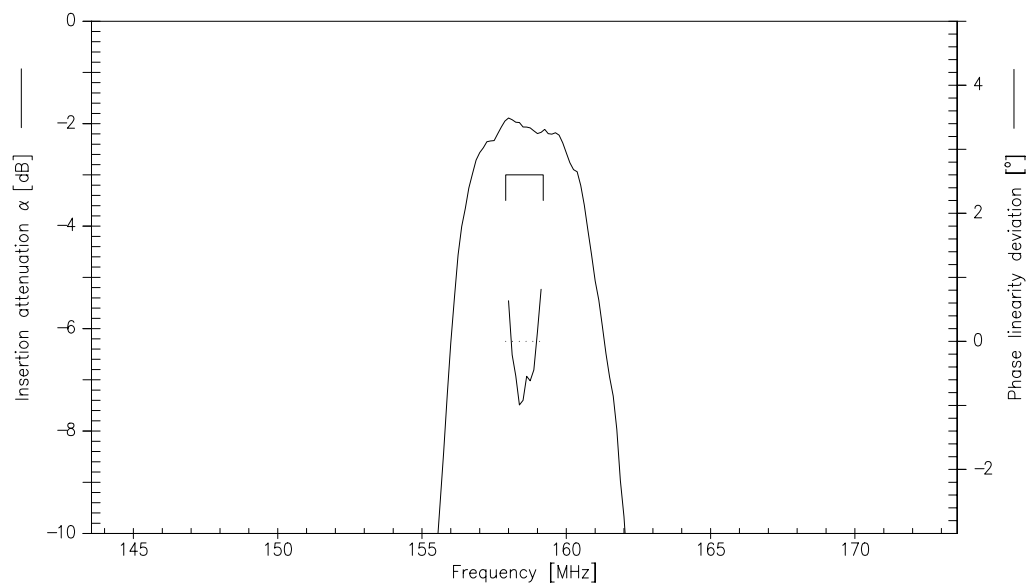



SAW Components	B4908
Low-Loss Filter for Mobile Communication	158,55 MHz
Data Sheet	SMD

Published by EPCOS AG
Surface Acoustic Wave Components Division, OFW E MF
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.