

FRACTIONS= +/- .032


The drawing shows three views of the VPP36-1560.DC2 package:

- Top View:** A square package with a width of 2.0. The central label contains the following information:
 - Part number: VPP36-1560
 - Class: CLASS B
 - Logos: RJ, VDE, and SP.
 - Pin numbers 1 through 12 are indicated around the perimeter.
- Side View:** Shows the package height as 2.50. The label on the side reads:
 - EIA-17-YYWW
 - XXX B3
 The distance from the top of the package to the top of the label is 1.850.
- End View:** Shows the package width as 2.50 (labeled REF). The height is 3.0 (labeled REF). The package has four pins on each side, with dimensions of .600, .300, and .600 between the pin rows.


ALL MANUFACTURING

**- ALL MANUFACTURING
SITES USE THIS MARK**

PC PINS .045 SQ

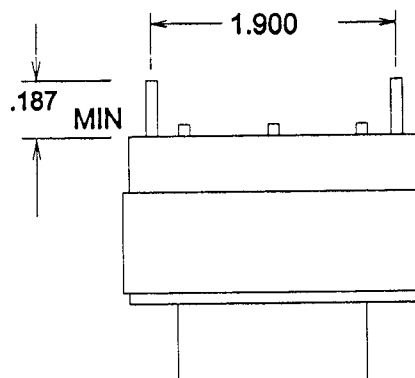

115/230V
50/60 HZ

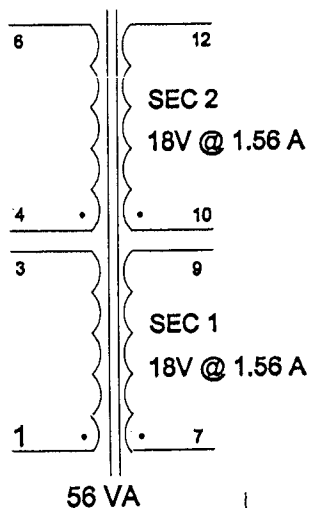

56 VA

PRODUCTION TESTS

URNS RATIO = 100%

**DC
RESISTANCE
IN OHMS**

1-3 =	21.5 NOM
4-6 =	26.5 NOM
7-9 =	.78 NOM
10-12 =	.95 NOM

MAX EXCITATION CURRENT = 75 MA

APPLY 230V 60HZ 1-6 (3+4)

PRI WDGS 114.5 TO 115.5 V

SEC WDGS 20.7 TO 21.6 V

HIPOT: 4000V P-S

4000V P,S, TO CORE

500V P-P, S-S

IMPREGNATION NOTES: PREHEAT 2 HRS
PINS TO BE FREE OF IMPREGNATION.

FINAL ASSEMBLY NOTES

METHOD 1 X 1
LEAVE OFF LAST "I" PCS

MARKING SEE LABEL DETAIL ABOVE
APPLY PART NO. LABEL, AFTER IMPREGNATION



PART NO.: VPP36-1560.