

FEATURES:

- Switching capacity up to 5A
- Narrow width for high density mounting
- High dielectric strength in small package
- Low power consumptions

 **E197851**



17.5 x 6.7 x 12.5 mm

CONTACT DATA

Contact Arrangement	1A = SPST N.O.
Contact Rating	5A @ 250VAC & 30VDC
Contact Resistance	< 50 milliohms initial
Contact Material	AgSnO ₂
Maximum Switching Power	150W, 1250VA
Maximum Switching Voltage	300VAC, 110VDC
Maximum Switching Current	5A

COIL DATA

Coil Voltage VDC		Coil Resistance $\Omega \pm 10\%$	Pick Up Voltage VDC (max) 75% of rated voltage	Release Voltage VDC (min) 10% of rated voltage	Coil Power W	Operate Time ms	Release Time ms
Rated	Max.						
5	6.5	125	3.75	0.5	.20	10	5
12	15.6	720	9.00	1.2			
24	31.2	2880	18.00	2.4			

CAUTION:

1. The use of any coil voltage less than the rated coil voltage may compromise the operation of the relay.
2. Pickup and release voltages are for test purposes only and are not to be used as design criteria.


GENERAL DATA

Electrical Life @ rated load	100K cycles, typical
Mechanical Life	10M cycles, typical
Insulation Resistance	100M Ω min @ 500VDC
Dielectric Strength, Coil to Contact	3000V rms min. @ sea level
Contact to Contact	750V rms min. @ sea level
Shock Resistance	100m/s ² for 11ms
Vibration Resistance	1.50mm double amplitude 10-40Hz
Operating Temperature	-40 °C to + 85 °C
Storage Temperature	-40 °C to + 155 °C
Solderability	230 °C \pm 2 °C for 10 \pm 0.5s
Weight	3g


ORDERING INFORMATION

1. Series:	WJ101	1A	S	12VDC
WJ101				
2. Contact Arrangement:				
1A = SPST N.O.				
3. Sealing Options:				
S = Sealed				
4. Coil Voltage:				
5VDC				
12VDC				
24VDC				

DIMENSIONS (Units = mm)

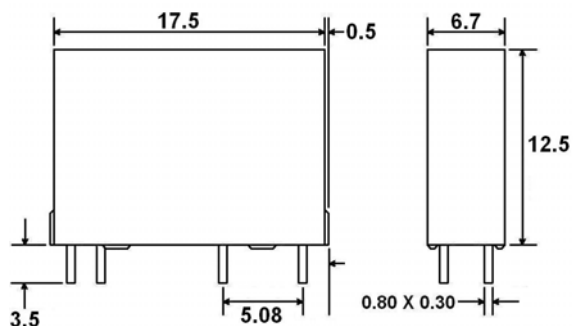

SCHEMATICS & PC LAYOUTS (BOTTOM VIEWS)

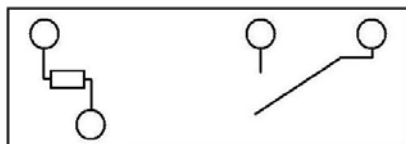

1A

