

### DESCRIPTION

The AMC8878/8879 series is a low noise, low dropout linear regulator operating from 2.5V to 6.5V input. An external capacitor can be connected to the bypass pin to lower the output noise level to  $30\mu V_{RMS}$ .

Designed with a P-channel MOSFET output transistor, the AMC8878/8879 consume a low supply current, independent of the load current and dropout voltage. The internal thermal shut down circuit will limits the junction temperature to below 150°C. Other features include thermal protection, reverse battery protection and output current limit. Both AMC8878 and AMC8879 come in a miniature 5-pin SOT-23 package.

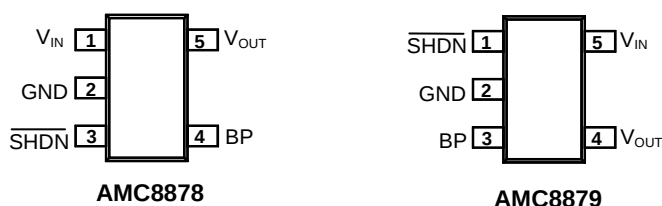
### FEATURES

- Low output noise:  $30\mu V_{RMS}$
- Industry standard'2982 pin assignment (AMC8878)
- Output voltage precision of  $\pm 1.4\%$  accuracy
- Very low dropout voltage: 50mV/50mA and 165mV/150mA
- On/Off control
- Low  $I_Q$ : 1.6 $\mu A$
- Short circuit protection
- Internal thermal overload protection
- Available in surface mount 5-pin SOT-23 package.
- Enhanced pin-to-pin Compatible to the MAX8878 (AMC8878) and TK111xxS (AMC8879) series.

### APPLICATIONS

- Cellular Telephones
- Battery Powered Systems
- Hand-Held Instruments
- Pagers
- Personal Data Assistance (PDA)
- PCMCIA Cards

### PACKAGE PIN OUT




5-Pin Plastic SOT-23  
Surface Mount  
(Top View)

### ORDER INFORMATION
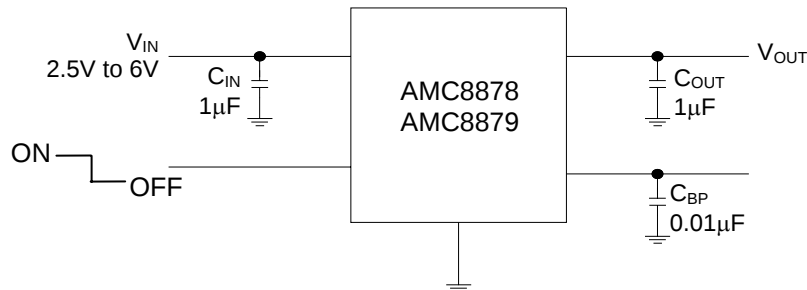
| Temperature Range                      | DBT | Plastic SOT-23             | DBT | Plastic SOT-23             |
|----------------------------------------|-----|----------------------------|-----|----------------------------|
|                                        |     | 5-pin                      |     | 5-pin                      |
| $0^{\circ}C \leq T_A \leq 70^{\circ}C$ |     | AMC8878-X.XDBT             |     | AMC8879-X.XDBT             |
| $0^{\circ}C \leq T_A \leq 70^{\circ}C$ |     | AMC8878-X.XDBTF(Lead Free) |     | AMC8879-X.XDBTF(Lead Free) |

### EXPANDED ORDER INFORMATION

| Device Name    | Output Voltage | Symbolization |         |
|----------------|----------------|---------------|---------|
|                |                | AMC8878       | AMC8879 |
| AMC887ف1.8DBT  | 1.8V           | AB18          | AC18    |
| AMC887ف2.0DBT  | 2.0V           | AB20          | AC20    |
| AMC887ف2.5DBT  | 2.5V           | AB25          | AC25    |
| AMC887ف2.8DBT  | 2.8V           | AB28          | AC28    |
| AMC887ف2.85DBT | 2.85V          | AB2U          | AC2U    |
| AMC887ف3.0DBT  | 3.0V           | AB30          | AC30    |
| AMC887ف3.2DBT  | 3.2V           | AB32          | AC32    |
| AMC887ف3.3DBT  | 3.3V           | AB33          | AC33    |
| AMC887ف5.0DBT  | 5.0V           | AB50          | AC50    |

**TYPICAL APPLICATION**

**ABSOLUTE MAXIMUM RATINGS (Note)**

|                                                                                                                                                                              |                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Input Voltage, $V_{IN}$                                                                                                                                                      | 12V             |
| Operating Junction Temperature, $T_J$                                                                                                                                        | 150°C           |
| Storage Temperature Range                                                                                                                                                    | -65°C to +150°C |
| Lead Temperature (soldering, 10 seconds)                                                                                                                                     | +260°C          |
| Power Dissipation, $P_D$ @ $T_A = 70^\circ\text{C}$                                                                                                                          | 150 mW          |
| Note: Exceeding these ratings could cause damage to the device. All voltages are with respect to Ground. Currents are positive into, negative out of the specified terminal. |                 |

**THERMAL DATA**
**DB PACKAGE:**

|                                                                                                                                                                                                                                                                                                                                     |         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Thermal Resistance from Junction to Ambient, $\theta_{JA}$                                                                                                                                                                                                                                                                          | 220°C/W |
| Junction Temperature Calculation: $T_J = T_A + (P_D \times \theta_{JA})$ .<br>The $\theta_{JA}$ numbers are guidelines for the thermal performance of the device/pc-board system.<br>Connect the ground pin to ground using a large pad or ground plane for better heat dissipation.<br>All of the above assume no ambient airflow. |         |

**Maximum Power Calculation:**

$$P_{D(MAX)} = \frac{T_{J(MAX)} - T_{A(MAX)}}{\theta_{JA}}$$

$T_J(^{\circ}\text{C})$ : Maximum recommended junction temperature

$T_A(^{\circ}\text{C})$ : Ambient temperature of the application

$\theta_{JA}(^{\circ}\text{C/W})$ : Junction-to-junction temperature thermal resistance of the package, and other heat dissipating materials.

**The maximum power dissipation for a single-output regulator is :**

$$P_{D(MAX)} = [(V_{IN(MAX)} - V_{OUT(NOM)}) \times I_{OUT(NOM)} + V_{IN(MAX)} \times I_Q]$$

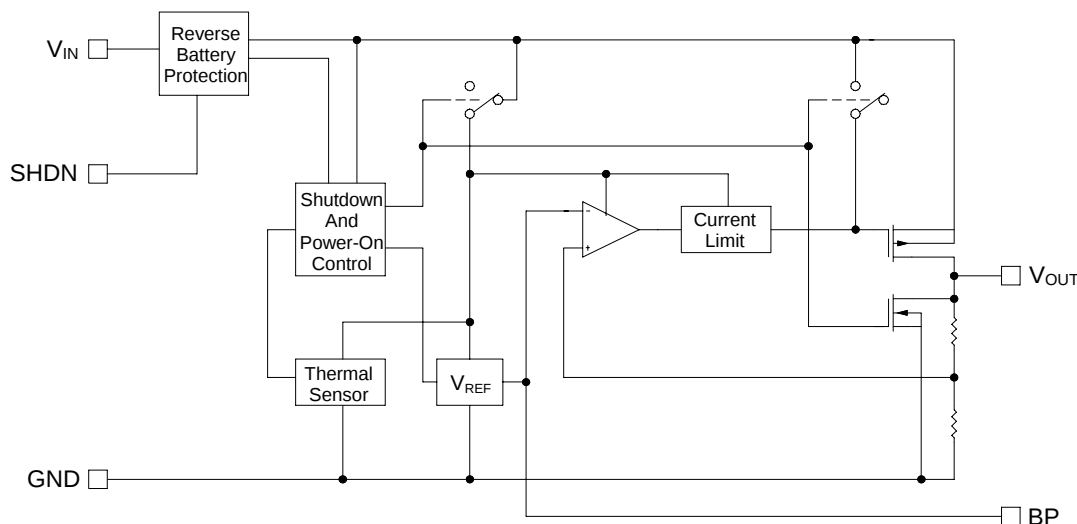
Where:  $V_{OUT(NOM)}$  = the nominal output voltage

$I_{OUT(NOM)}$  = the nominal output current, and

$I_Q$  = the quiescent current the regulator consumes at  $I_{OUT(MAX)}$

$V_{IN(MAX)}$  = the maximum input voltage

Then  $\theta_{JA} = (+150^{\circ}\text{C} - T_A)/P_D$

**BLOCK DIAGRAM**

**PIN DESCRIPTION**

| Pin Number |         | Pin Name          | Pin Function                                                                                                 |
|------------|---------|-------------------|--------------------------------------------------------------------------------------------------------------|
| AMC8878    | AMC8879 |                   |                                                                                                              |
| 1          | 5       | $V_{IN}$          | Input                                                                                                        |
| 2          | 2       | GND               | Ground                                                                                                       |
| 3          | 1       | $\overline{SHDN}$ | Logic control shutdown pin; HI: Device is ON, LO: Device is OFF                                              |
| 4          | 3       | BP                | Noise bypass pin; The output noise level can be reduced to $30\mu V_{RMS}$ by connecting external capacitors |
| 5          | 4       | $V_{OUT}$         | Output                                                                                                       |

**RECOMMENDED OPERATING CONDITIONS**

| Parameter                                                         | Symbol   | Recommended Operating Conditions |      |      | Units   |
|-------------------------------------------------------------------|----------|----------------------------------|------|------|---------|
|                                                                   |          | Min.                             | Typ. | Max. |         |
| Input Voltage                                                     | $V_{IN}$ | 2.5                              |      | 6.5  | V       |
| Load Current                                                      | $I_o$    | 5                                |      | 150  | mA      |
| Input Capacitor ( $V_{IN}$ to GND)                                |          | 1.0                              |      |      | $\mu F$ |
| Output Capacitor with ESR of $10\Omega$ max., ( $V_{OUT}$ to GND) |          | 1.0                              |      |      | $\mu F$ |

Note:

- $C_{IN}$ : A  $1.0 \mu F$  capacitor (or larger) should be placed between  $V_{IN}$  to GND.
- $C_{OUT}$ : A  $1.0 \mu F$  (or larger) capacitor is recommended between  $V_{OUT}$  and GND for stability and improving the regulator's transient response. The ESR (Effective Series Resistance) of this capacitor has no effect on regulator stability, but low ESR capacitors improve high frequency transient response. The value of this capacitor may be increased without limit, but values larger than  $10\mu F$  tend to increase the settling time after a step change in input voltage or output current. The part may oscillate without the capacitor. Any type of capacitor can be used, but not Aluminum electrolytics when operating below  $-25^\circ C$ . The capacitance may be increased without limit.

**ELECTRICAL CHARACTERISTICS**

Unless otherwise specified, these specifications apply over the operating ambient temperature of 0°C to +70°C with  $V_{IN} = V_{OUT(NOMIAL)} + 0.5V$ , and are for DC characteristics only. (Low duty cycle pulse testing techniques are used which maintains junction and case temperatures equal to the ambient temperature.)

| Parameter                     | Symbol           | Test Conditions                                             | AMC8878/8879        |      |      | Units         |
|-------------------------------|------------------|-------------------------------------------------------------|---------------------|------|------|---------------|
|                               |                  |                                                             | Min                 | Typ. | Max  |               |
| Output Voltage Accuracy       | $\Delta V_{OUT}$ | $I_{OUT} = 10mA, T_A = +25^\circ C$                         | -1.4                |      | +1.4 | %             |
|                               |                  | $I_{OUT} = 10 \text{ to } 150mA$                            | -3                  |      | +2   |               |
| Maximum Output Current        | $I_{OUT}$        |                                                             | 150                 |      |      | mA            |
| Current Limit                 | $I_{LIMIT}$      |                                                             | 160                 |      |      | mA            |
| Ground Pin Current            | $I_Q$            | $I_{OUT} = 10mA$                                            |                     | 1.6  | 10   | $\mu A$       |
|                               |                  | $I_{OUT} = 150mA$                                           |                     | 1.7  |      |               |
| Dropout Voltage               | $V_{DROP}$       | $I_{OUT} = 1mA$                                             |                     | 1.1  |      | mV            |
|                               |                  | $I_{OUT} = 50mA$                                            |                     | 50   | 120  |               |
|                               |                  | $I_{OUT} = 150mA$                                           |                     | 165  |      |               |
| Line Regulation               | $\Delta V_{OI}$  | $V_{IN} = (V_{OUT} + 0.1V) \text{ to } 6.5V, I_{OUT} = 1mA$ | -0.15               | 0    | 0.15 | %/V           |
| Load Regulation               | $\Delta V_{OL}$  | $I_{OUT} = 10 \text{ to } 120mA, C_{OUT} = 1\mu F$          |                     | 0.01 | 0.04 | %/mA          |
| Ripple Rejection              | PSRR             | $f=100Hz, I_L=100\mu A$                                     |                     | 50   |      | dB            |
| Output Voltage Noise          | $e_n$            | $f = 10Hz - 100KHz, C_{OUT} = 10\mu F$                      |                     | 30   |      | $\mu V_{RMS}$ |
|                               |                  | $C_{BP} = 0.01\mu F, C_{OUT} = 100\mu F$                    |                     | 20   |      |               |
| Shutdown Input Threshold High | $V_{SIH}$        | $V_{IN} = 2.5V \text{ to } 5.5V$                            | 2.0                 |      |      | V             |
| Shutdown Input Threshold Low  | $V_{SIL}$        | $V_{IN} = 2.5V \text{ to } 5.5V$                            |                     |      | 0.4  | V             |
| Shutdown Supply Current       | $I_{Q(SHDN)}$    | $V_{OUT} = 0V$                                              | $T_A = +25^\circ C$ | 0.01 | 1    | $\mu A$       |
|                               |                  |                                                             | $T_A = +85^\circ C$ | 0.2  |      |               |
| Shutdown Input Bias Current   | $I_{SHDN}$       | $\overline{V_{SHDN}} = V_{IN}$                              | $T_A = +25^\circ C$ | 0.01 | 100  | nA            |
|                               |                  |                                                             | $T_A = +85^\circ C$ | 0.5  |      |               |
| Shutdown Exit Delay           | $t_{delay}$      | $C_{BP} = 0.1\mu F, C_{OUT} = 1\mu F, \text{ No load}$      | $T_A = +25^\circ C$ | 6    |      | ms            |
|                               |                  |                                                             | $T_A = +85^\circ C$ | 6    |      |               |
| Thermal Shutdown Temperature  | $T_{SHDN}$       |                                                             |                     | +150 |      | $^\circ C$    |

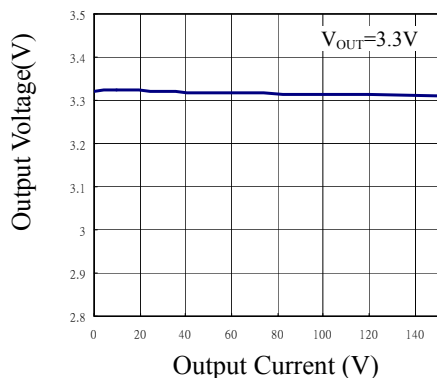
Note:

1. Current limit is measured at constant junction temperature, using pulse ON time.
2. Dropout is measured at constant junction temperature, using pulse ON time, and criterion is  $V_{OUT}$  inside target value  $\pm 2\%$ .
3. Regulation is measured at constant junction temperature, using pulsed ON time.


### CHARACTERIZATION CURVES

$V_{IN} = V_{OUT(NOMINAL)} + 0.5V$  or  $2.5V$  (whichever is greater),  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $C_{BP} = 0.01\mu F$ ,  $T_A = +25^\circ C$ ,  
Using pulsed ON time, unless otherwise noted.


**Output Voltage v.s. Output Current**




**Quiescent Current v.s. Output Current**

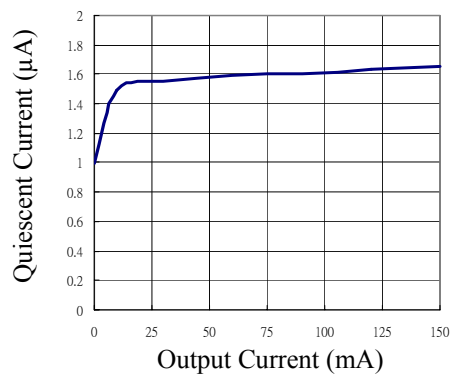


**Output Voltage v.s. Input Voltage**

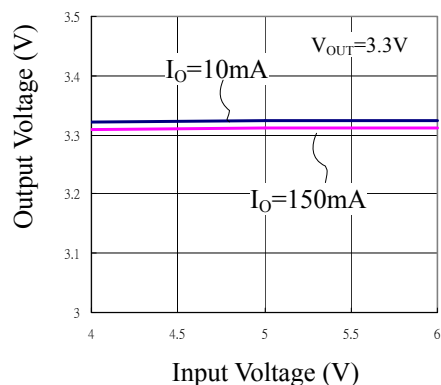


**Quiescent Current v.s. Input Voltage**

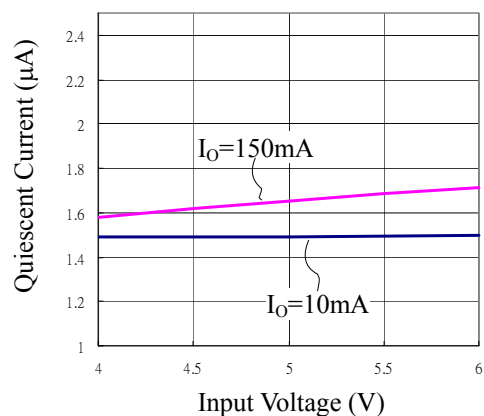

**Output Voltage v.s. Temperature**






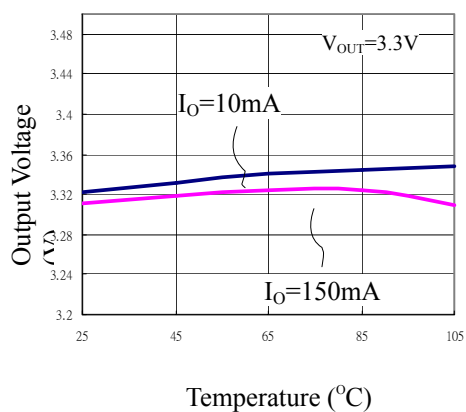


**Quiescent Current v.s. Temperature**

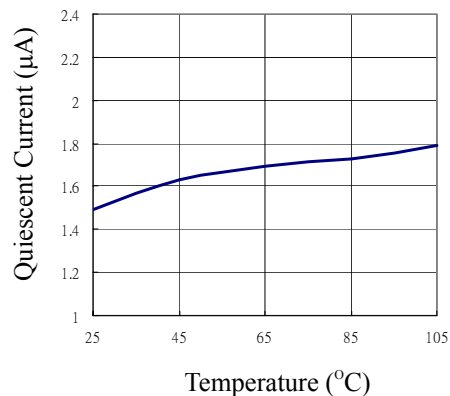



**CHARACTERIZATION CURVES (Continued)**

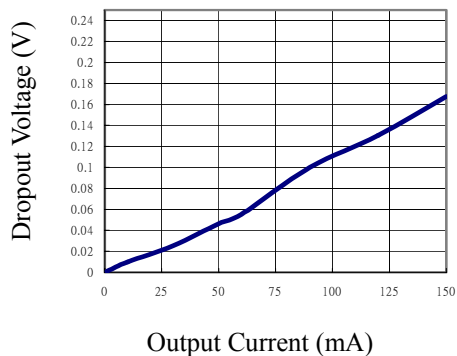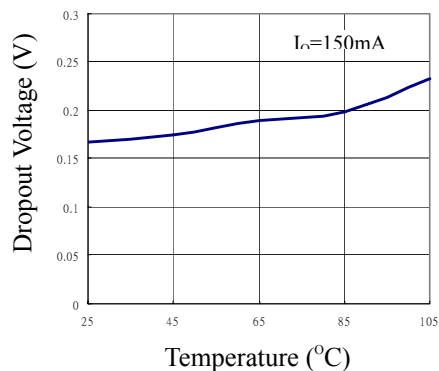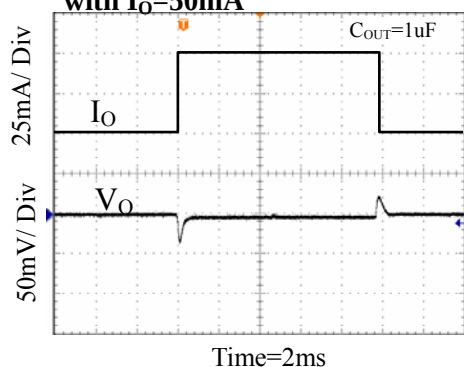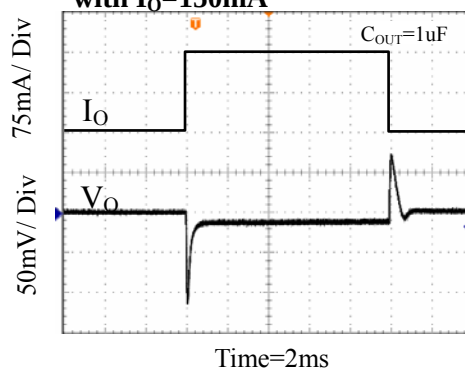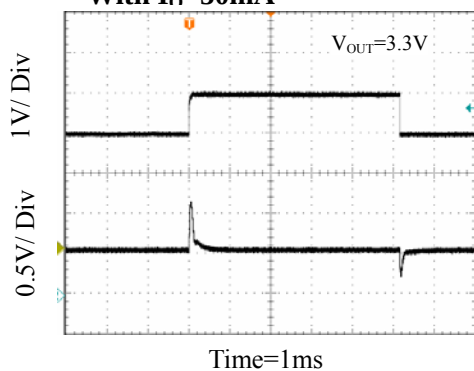
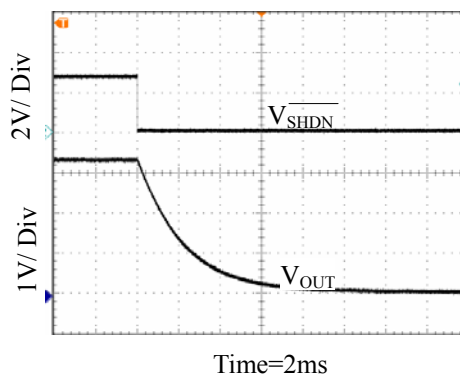
$V_{IN} = V_{OUT(NOMINAL)} + 0.5V$  or  $2.5V$  (whichever is greater),  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $C_{BP} = 0.01\mu F$ ,  $T_A = +25^\circ C$ ,  
Using pulsed ON time, unless otherwise noted.

**Dropout Voltage v.s. Output Current**

**Dropout Voltage v.s. Temperature**

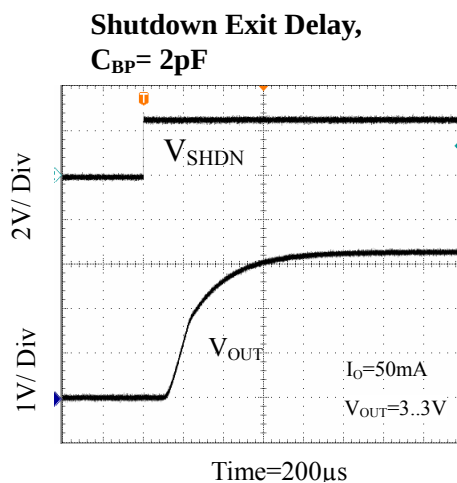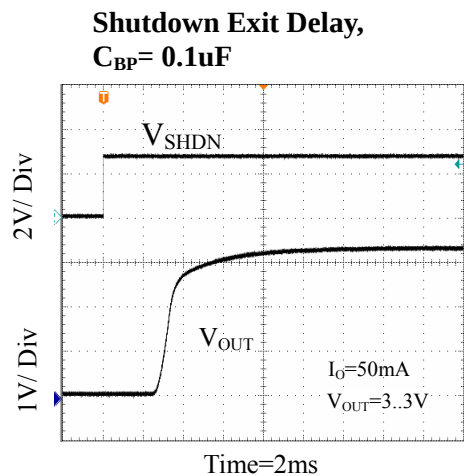**Load Transient Response  
with  $I_O = 50mA$** 

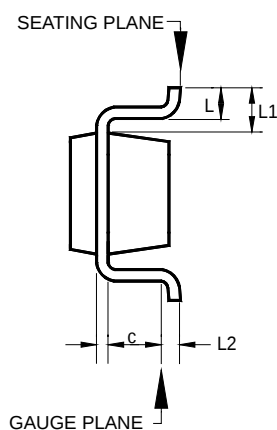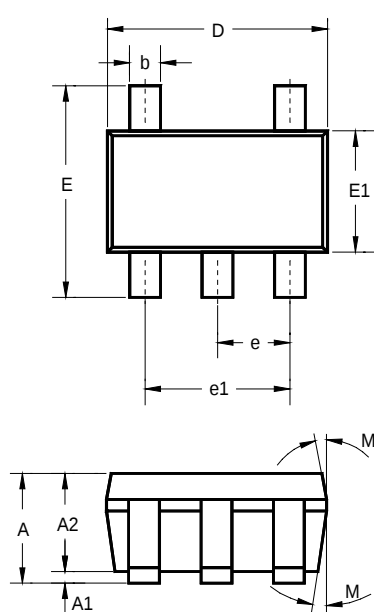**Load Transient Response  
with  $I_O = 150mA$** 

**Line Transient Response,  
With  $I_O = 50mA$** 

**Entering Shutdown,  
No Load**


**CHARACTERIZATION CURVES (Continued)**

$V_{IN} = V_{OUT(NOMINAL)} + 0.5V$  or  $2.5V$  (whichever is greater),  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $C_{BP} = 0.01\mu F$ ,  $T_A = +25^\circ C$ ,  
Using plused ON time, unless otherwise noted.



**PACKAGE**
**5-Pin SOT-23**


|    | INCHES    |       |       | MILLIMETERS |      |      |
|----|-----------|-------|-------|-------------|------|------|
|    | MIN       | TYP   | MAX   | MIN         | TYP  | MAX  |
| A  | -         | -     | 0.057 | -           | -    | 1.45 |
| A1 | -         | -     | 0.006 | -           | -    | 0.15 |
| A2 | 0.035     | 0.045 | 0.051 | 0.90        | 1.15 | 1.30 |
| b  | 0.012     | -     | 0.020 | 0.30        | -    | 0.50 |
| c  | 0.003     | -     | 0.009 | 0.08        | -    | 0.22 |
| D  | 0.114 BSC |       |       | 2.90 BSC    |      |      |
| E  | 0.110 BSC |       |       | 2.80 BSC    |      |      |
| E1 | 0.063 BSC |       |       | 1.60 BSC    |      |      |
| e  | 0.037 BSC |       |       | 0.95 BSC    |      |      |
| e1 | 0.075 BSC |       |       | 1.90 BSC    |      |      |
| L  | 0.012     | 0.018 | 0.024 | 0.30        | 0.45 | 0.60 |
| L1 | 0.024 REF |       |       | 0.60 REF    |      |      |
| L2 | 0.010 BSC |       |       | 0.25 BSC    |      |      |
| °M | 5°        | 10°   | 15°   | 5°          | 10°  | 15°  |

### **IMPORTANT NOTICE**

ADDtek reserves the right to make changes to its products or to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

A few applications using integrated circuit products may involve potential risks of death, personal injury, or severe property or environmental damage. ADDtek integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life-support applications, devices or systems or other critical applications. Use of ADDtek products in such applications is understood to be fully at the risk of the customer. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

ADDtek assumes no liability to customer product design or application support. ADDtek warrants the performance of its products to the specifications applicable at the time of sale.

---

**ADDtek Corp.**

9F, No. 20, Sec. 3, Bade Rd., Taipei, Taiwan, 105

TEL: 2-25700299

FAX: 2-25700196

---