

FESTOON LED BULB

Data Sheet

6pcs LED Bulb Series

AB-06XXXX-XXXX-XX

Description:

These high voltage LED bulbs are specifically designed for electric equipment, indicator light switch and where a wide view angle.

The 5mm round shaped radiation pattern (60°) and high luminous intensity ensure that these devices are excellent for wide field of view outdoor applications where a wide viewing angle and readability in sunlight are essential.

High efficiency LED materials are used in this Bulb.

Every lamp is made with an advanced optical grade epoxy offering superior high shock and high temperature resistance in outdoor applications.

Feature:

- Wide view angle
- High luminous output
- Seven kind color
- Free to differentiate anode and cathode(Bi-Polar)
- Solid-state Vibration resistant
- Saving power
- Long life

Option:

- 12V DC
- Other industry standard base

Selection guide:

AB-06XXXX-XXXX-XX

AB:A-BRIGHT product

5:Round type dimensions

X: Color

XXXV: Input voltage

X: Bulb Base


A-BRIGHT

A-BRIGHT INDUSTRIAL CO.,LTD.

Part No.: AB-0651G0-12VD-CF-B

6 Lamps LED Bulb

PACKAGE DIMENSIONS:

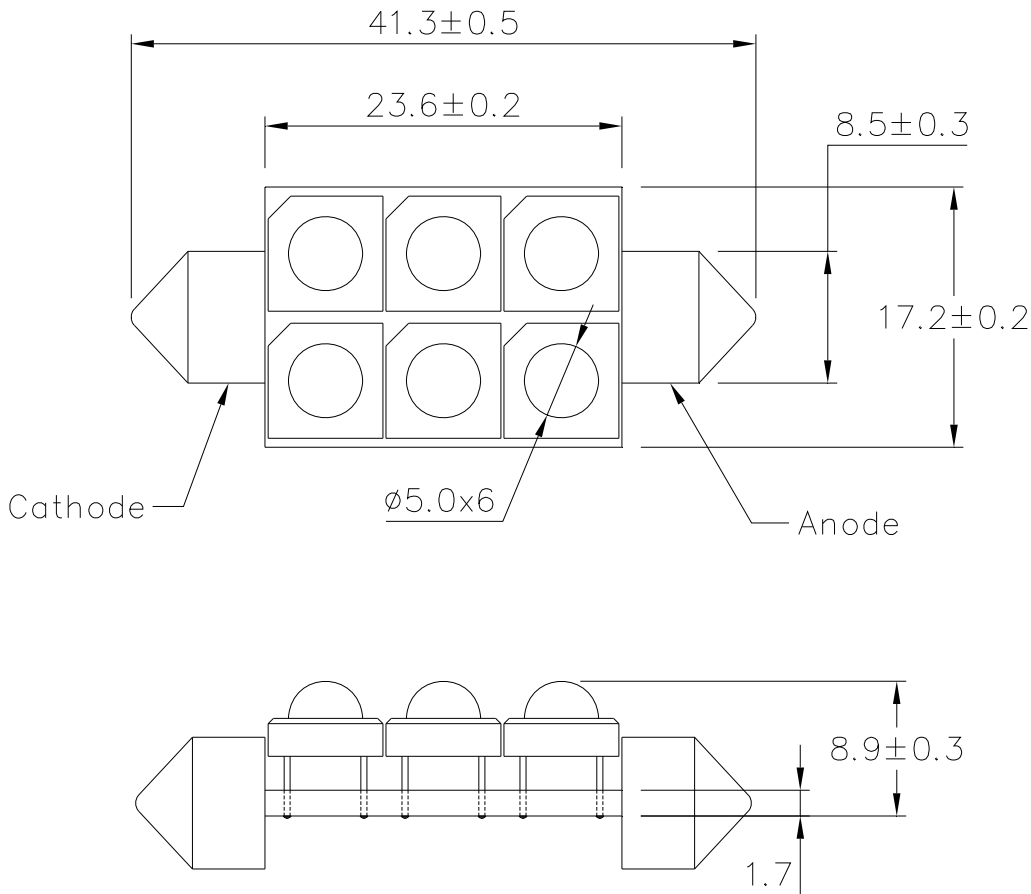

NOTE:

- 1.All dimensions are in millimeter.
- 2.All tolerance are $\pm 0.25\text{mm}$.

Part No.: AB-0651B0-12VD-CF-B

6 Lamps LED Bulb

FEATURE:

- SUPER LUMINOSITY GREEN LED (InGaN).
- WATER CLEAR PACKAGE.
- 5mm ALL RESIN MOLD.
- WIDE VIEWING ANGLE.
- ELECTRIC DC.

MATERIALS:

- LED LENS: UV RESISTENT EPOXY

ABSOLUTE MAXIMUM RATING: $T_a = 25\text{ }^{\circ}\text{C}$

- PEAK OPERATE VOLTAGE..... 14 V
- OPERATING TEMPERATURE..... $-25\text{ TO }+85^{\circ}\text{C}$
- STORAGE TEMPERATURE..... $-35\text{ TO }+100^{\circ}\text{C}$
- LED BULB LIFE..... 20000 HOURS
(LUMINANCE REDUCES to 50%)

ABSOLUTE OPTICAL CHARACTERISTIC $T_a = 25^{\circ}\text{C}$

PARAMETER		SYMBOL	MIN	TYP	MAX	UNIT
Power dissipation		P_O	----	0.5	----	W
Operate Voltage		V	----	12	14	V
Luminous Intensity	$V_{IN} = 12\text{V DC}$	I_V	----	12000	----	mcd
Peak Wavelength	$V_{IN} = 12\text{V DC}$	λ_D	----	525	----	nm
Forward Current	$V_{IN} = 12\text{V DC}$	I_F	----	35	----	mA
Viewing Angle		$2\theta_{1/2}$	----	60	----	deg